

Low Cost Hand Vein Authentication System on Embedded Linux Platform

Gayathri S, K Gerard Joe Nigel, S Prabakar

Abstract: Biometrics is one of the highly accurate technologies in the field of user identification. This paper presents a low cost contactless biometric identification system on Embedded Linux platform which is used to authenticate a person using the vein pattern in hand. As the system uses the vein pattern which is unique to each individual and is contained within human body, it is highly secure and accurate. Moreover, its contact less feature gives it a hygienic advantage over other personal authentication technologies. The system works by capturing a person's vein pattern image by radiating it with near-infrared rays. The deoxygenated blood in the vein absorbs the near infrared radiation and thus the vein pattern appears as black areas in the image. This captured pattern is stored as a template for the user verification. The experimental results of the proposed system shows that the dorsal hand vein pattern is highly unique and is a better alternative for other personal authentication systems. Also, the use of low cost ccd camera and open source Embedded Linux made the system cheaper than the conventional systems without risking accuracy.

Index terms: Embedded Linux, Hand vein authentication, pattern extraction, pattern matching, verification.

I. INTRODUCTION

Biometric recognition which is based on the inborn physical and behavioral characteristics of a person, has become an important technique for security systems. Fingerprint, face, voice, iris, retina and hand geometry are some of the biometrics which are in use since long for personal identification. One of the most secure and accurate biometric is the vascular technologies. A vein authentication system uses blood vessel patterns as a personal identification factor. Uniqueness is one of the main advantages of this system as the vein pattern of each individual differs. Also right and left hand vein pattern of the same person is entirely different. It provides a high level of accuracy as the vein information which are internal to the human body is hard to forge. As the system uses the near infrared imaging techniques, there is no need to inject any chemicals into the body. The main aspect of such systems is to capture and extract the vein pattern correctly with a reduced cost and processing complexities. The opportunities to implement hand vein authentication system span a wide range applications including security systems, banking, commercial enterprises and educational facilities.

Manuscript published on 30 March 2013.

*Correspondence Author(s)

Gayathri S, M.Tech, Embedded system, Karunya University, Coimbatore, India.

K Gerard Joe Nigel, Assistant Professor, EIE Department, Karunya University, Coimbatore, India.

S Prabakar, Assistant Professor, EIE Department, Karunya University, Coimbatore, India.

© The Authors. Published by Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP). This is an open access article under the CC-BY-NC-ND license <http://creativecommons.org/licenses/by-nc-nd/4.0/>

SYSTEM DESCRIPTION

The entire system can be divided into four steps: data collection, preprocessing, feature extraction and feature matching.

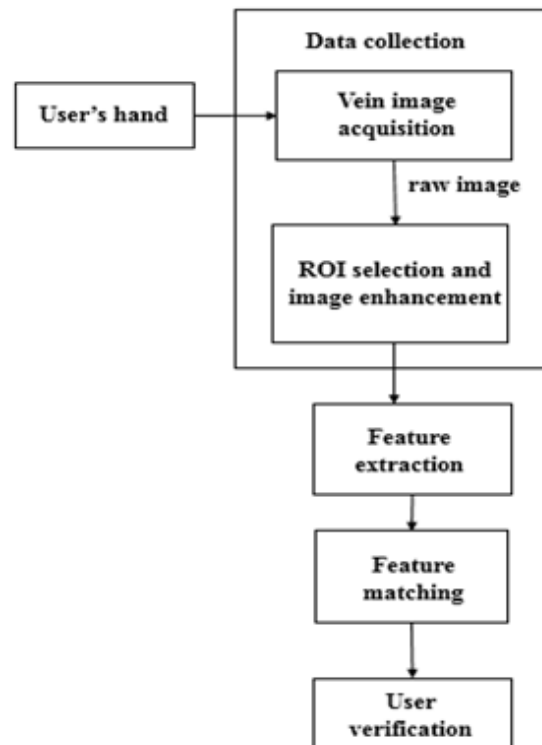


Fig 1: Block diagram of the proposed authentication system

An IR sensitive ccd camera which is provided with an array of 24 IR LEDS is used to capture the vein image. A rectangular region in the hand images is defined as the region of interest (ROI). The clarity of the vein pattern in the extracted ROI varies from image to image, therefore the quality of these images need to be enhanced before further processing. So the contrast of the vein image is enhanced using histogram equalization. Histogram equalization redistributes the pixel intensity values thereby changing the contrast of image. As the size of vein grows, only the shape of the vein pattern is used as the sole feature to recognize each individual. A good representation of the vein pattern represented as dark lines is done via extracting its skeleton. The extracted feature is then matched with the stored template using correlation to authenticate the user.

III. IMAGE ACQUISITION

In electromagnetic spectrum, the wavelengths from 740 to 1100 nm is called the medical spectral window. Infrared (IR) is long wavelength electromagnetic radiation whose wavelengths lies between about 750nm and 1mm. It is commonly divided into 3 spectral regions: near, mid and far-infrared light. Infrared imaging is a non-invasive technique and is capable of capturing subcutaneous veins, i.e. veins on the surface of skin. Therefore by exposing the subjects' vein to infrared illumination of a specific wavelength, vein images can be captured and analyzed. It provides a contactless, non-invasive method and requires no injection of any agents into the blood vessels and hence it is the best method to capture vein images.

The infra-red imaging techniques can be divided in to two types, Far-Infrared (FIR) and Near- Infrared (NIR).FIRmethod uses the property that the superficial human veins have higher temperature than the surrounding tissues.So this method can be used only in subcutaneous vein imaging. The NIR method gives better results for vein detection because of its certain attributes as compared to FIR. This method is not a temperature based technique since normal body temperature or surrounding temperature cannot interfere with this method. Also in NIR region the absorption of light is minimum and hence light penetrates through the tissues deeply, making the technique non-invasive. Thedeoxygenated blood in the vein absorbs the NIR light almost completely and thus the vein appears as darker areas in an image taken by an IR sensitive CCD cameraSo NIR method can be used in all veins imaging with high accuracy. A maximum penetration distance is 3mm and the captured images will be always grayscale thus benefitting the processing.

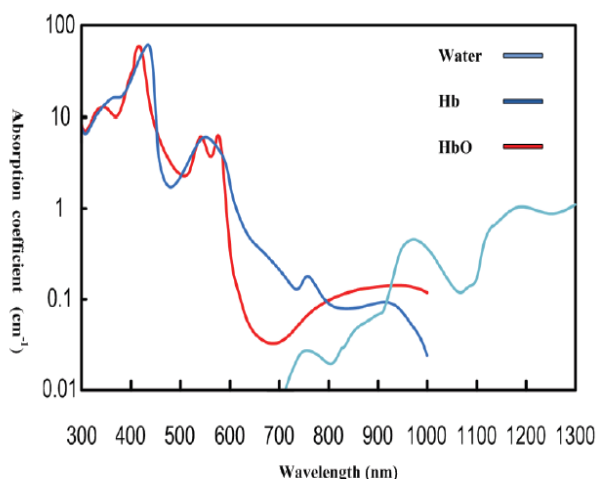


Fig.2.Venous plexus of the hand

In order to develop a low cost system which has the ability to capture the vein patterns a Capture CCD IR bullet camera is used. The camera has an array of 24 IR LEDs.It requires 12V DC supply and its video format is PAL. To capture the vein image with high quality the camera is kept in night mode. The camera is connected to the Embedded Linux platform via a USB 2.0 connection.The size of the acquired image is 320 x 240 pixels.



Fig. 3 IR sensitive CCD camera

A database of dorsal hand vein images of different individuals are collected in order to verify the uniqueness of the vein pattern. It is found out that the hand vein pattern are different for each individual and even right and left hand vein patterns of same individual are different.

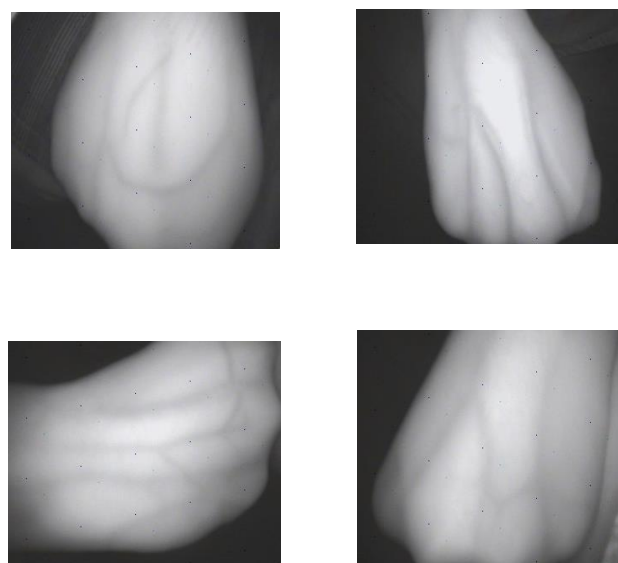


Fig.4 Samples of the captured hand dorsal vein images

IV. HAND VEIN IMAGE PROCESSING

Infrared radiation does not penetrate all kinds of tissue in the same manner and therefore images taken from various subjects may vary significantly in terms of clarity of the vein model and in some severe cases the resulting image may have connectivity problems, several regions could be blurred or even impossible to detect. So various image processing algorithms are needed to extract the correct information from the captured images. All the processing is done using Python with OpenCV bindings.




Fig.5 Hand vein image processing

A. Region of Interest Selection

The entire region is not needed for processing. So a region of interest has to be selected. Here a rectangular region of interest is defined and is resized for the future processing.

B. Histogram Equalization

The histogram is a graphical representation of the information contained in the image. It shows how the intensity values of an image are distributed and the range of brightness from dark to bright. For an 8-bit grayscale image, the histogram information is 256 binary size. Histogram is a useful tool to analyze the brightness and contrast of an image. By adjusting the intensity value of the pixels, an image can be contrast enhanced thus making histogram equalization a well-known technique for contrast enhancement. The contrast of the image is enhanced by increasing the dynamic range of intensity given to pixels with the most probable intensity values without change. One transformation function that accomplishes this is a cumulative distribution function. This method redistributes the pixel intensity values evenly by using cumulative (sum) histogram as a transfer function. The input pixel intensity represented by x is transformed to a new intensity x' by the transform function T without changing the number of pixels in x . The transform function, T is cumulative distributive function of x multiplied with a scale factor. The scale factor scales the new intensity value within the range of the intensity values, normally 0 ~255.

$$x' = T(x) = \sum_{i=0}^n n_i \cdot \left(\frac{\text{max. intensity}}{N} \right)$$

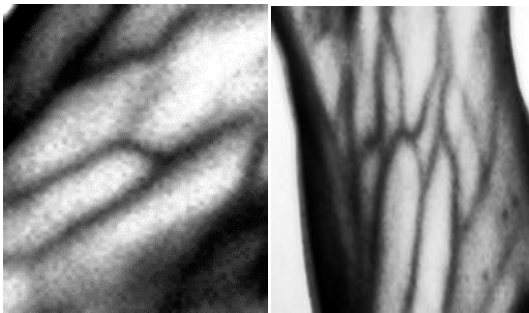


Fig. 6 Histogram equalized vein images

C. Thresholding

Image segmentation is a method which groups certain regions with respect to some common properties or the difference between the regions. It divides the image into a continuous set of pixels according to the assigned properties and hence used to separate the region of interest. One of the most important method for image segmentation is thresholding. In Thresholding pixels that are alike are grouped together and thus light and dark regions are separated. Thresholding can be defined as:

$$g(x,y) = \begin{cases} 1 & \text{if } f(x,y) > T \\ 0 & \text{if } f(x,y) \leq T \end{cases}$$

A threshold T is chosen to separate object from background and thus creates binary images by changing all pixels above T to 1 and below to 0.



Fig. 7 Thresholded vein images

D. Thinning Algorithm

Thinning is a morphological operation that can be used in a number of applications especially in pattern recognition and skeletonization. It is normally applied to binary images which remove selected foreground pixels from the given images and produces another binary image as output. Thinning operation normally tidy up edges by reducing all lines to single pixel thickness thereby creating the skeleton of the image. The behavior of the thinning operation depends on a structuring element with either one or zero at the origin. The thinning of an image X by a structuring element Y is defined as:

$$\text{Thin}(X,Y) = X - \text{hit and miss}(X, Y)$$

where the subtraction represents *logical subtraction* which is given by:

$$A - B = A \cap \text{NOT } B$$

The origin of the structuring element Y is translated from pixels to pixels in the given binary image X and at each such position it is compared with the underlying image pixels. Then the image pixel under the structuring element origin is set to zero if the foreground and background of structuring element and image exactly match with each other or else remain unchanged. As the thinning operation try to extract the skeleton of an image, it is a useful method in the vein pattern extraction. The skeleton is a binary representation of the pattern which is only one pixel wide.

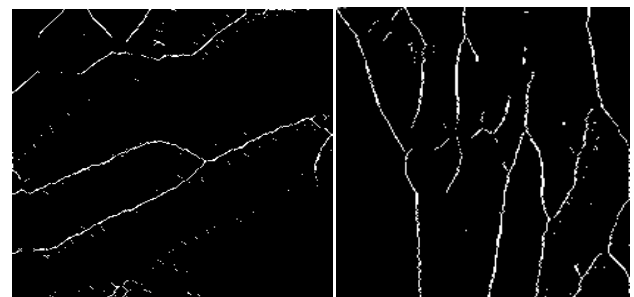



Fig. 8. Thinned vein images

E. Correlation

The cross-correlation algorithm is the most conventional method to match two images. The correlation operation is shift invariant and linear. It is a windowed operation and search for each and every possible points in the image to find a match with the template. The similarity between the image and the template is calculated by measuring the sum of the squares of the differences between values in the images and template. As the difference between the image and template increases the measured value also increases. The two-dimensional cross-correlation operation of images is given as:

$$A \cdot B = \sum_{j=-N}^N \sum_{i=-N}^N A(i,j)B(x+i,y+j)$$

Where A and B represents the images for matching.

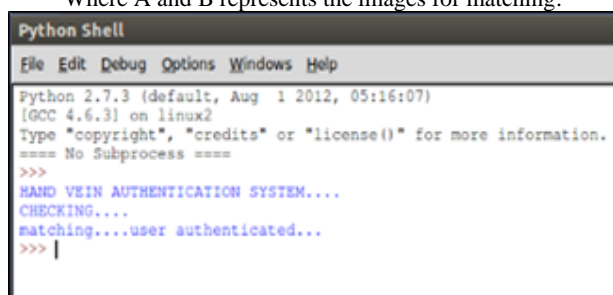

```
Python Shell
File Edit Debug Options Windows Help

Python 2.7.3 (default, Aug 1 2012, 05:16:07)
[GCC 4.6.3] on linux2
Type "copyright", "credits" or "license()" for more information.
==== No Subprocess ====
>>>
HAND VEIN AUTHENTICATION SYSTEM...
CHECKING...
matching...user authenticated...
>>> |
```

Fig.9 result for matching

V. RESULTS

The proposed hand vein authentication system uses the near infrared imaging techniques. It captures the vein images using low cost IR sensitive camera kept in night mode. Captured images will be processed before matching for noise suppression and data reduction. As the first phase, a study of various methods for vein image capturing is done and a low cost imaging method is selected. The real time software implementation is done using python OpenCV in Embedded Linux which is a free prototyping software.

VI. CONCLUSION AND FUTURE WORK

In order to make a complete system the proposed system has to be implemented on ARM 9 development board which support Embedded Linux platform as the future work. This system can be used in wide range of applications like ATMs, door security systems, PC login authentication, vehicle security systems etc.

REFERENCES

1. C. Nandini, Ashwini C, Medha Aparna, Nivedita Ramani, Pragnya Kini, Sheeba K, "Biometric Authentication by Dorsal Hand Vein Pattern", International Journal of Engineering and Technology, Vol: 2, No. 5, pg:837-840, May 2012.
2. Zhi Liu and Shangling Song, "An Embedded Real-Time Finger-Vein Recognition System for Mobile Devices", IEEE Transactions on Consumer Electronics, Vol. 58, No. 2, pg:522-527, May 2012
3. Azadeh Noori Hoshyar, Riza Sulaiman, Afsaneh Noori Hoshyar, "Smart Access Control With Finger Vein Authentication And Neural Network," Journal of American Science vol:7, No:9, pg:185-191, April 2011
4. Ushapriya, M. Subramani, "Highly Secure and Reliable User Identification Based on Finger Vein Patterns", Global Journal of Research in Engineering, Vol:11, No:3 Version 1.0, pg: 15-20, April 2011.
5. Hatim A. Aboalsamh, "A Multi Biometric System Using Combined Vein and Fingerprint Identification", International Journal Of

6. M. Deepamalar and M. Madheswaran, "An Improved Multimodal Palm Vein Recognition System Using Shape and Texture Features", International Journal of Computer Theory and Engineering, Vol. 2, No. 3, pg:436-444, June 2010
7. Ajay Kumar and K. Venkata Prathyusha, "Personal Authentication Using Hand Vein Triangulation and Knuckle Shape" IEEE Transactions on Image Processing, vol.18, No.9, September 2009.
8. Tanushri Chakravorty, "Low Cost Subcutaneous Vein Detection System using ARM9 Single Board Computer" Proc. International journal on Electronics Computer Technology, IEEE Press, April 2011.
9. T. Venkat Narayana Rao1, K. Preethi2 "Future of Human Security Based on Computational Intelligence Using Palm Vein Technology", International Journal of Computer Science & Emerging Technologies (IJCSET) 68 Volume 1 Issue 1, June 2010.
10. Ishani Sarkar1, Farkhod Alisherov2, Tai-hoon Kim3, and Debnath Bhattacharyya2, "Palm Vein Authentication System: A Review", International Journal of Control and Automation Vol. 3, No. 1, March, 2010
11. Daniel Hartung, Anika Pflug, Christoph Busch, "Vein Pattern Recognition Using Chain Codes, Spatial Information and Skeleton Fusing", The IEEE International journal on biometrics, 2010.
12. Hao Luo, Fa-xin Yu, Jeng-Shyang Pan, Shu-chuan Chu, Pei-Wei Tsai "A survey of vein recognition techniques", Information technology journal 9(6):1142,1149,2010.
13. Maleika Heenaye- Mamode Khan Naushad Ali Mamode Khan "A New Method to Extract Dorsal Hand Vein Pattern using Quadratic Inference Function", (IJCISIS) International Journal of Computer Science and Information Security, Vol. 6, No. 3, 2009.
14. Vincent Paquita, Jeffery R. Pricea, Fabrice M'eriaudeau, Kenneth W. Tobin and Thomas L. Ferrell, "Combining near-infrared illuminants to optimize venous imaging", OAK RIDGE national laboratory, 2008.
15. Yi-Bo Zhang1, Qin Li2, Jane You2, and Prabir Bhattacharya "Palm Vein Extraction and Matching for Personal Authentication" VISUAL 2007, LNCS 4781, pp. 154-164, 2007.
16. Mohamed Shahin, Ahmed Badawi, and Mohamed Kamel "Biometric Authentication Using Fast Correlation of Near Infrared Hand Vein Patterns", International Journal of Biological and Life Sciences 2:3 2006
17. Naoto Miura, Akio Nagasaka, Takafumi Miyatake, "Feature extraction of finger-vein patterns based on repeated line tracking and its application to personal identification", Machine Vision and Applications 15: 194-203, 2004.

AUTHOR PROFILE



Gayathri S, received B.Tech degree in Electronics and Communication from MG University, Kottayam, Kerala in 2011. She is pursuing M.Tech in Embedded system from Karunya University, Coimbatore, Tamilnadu. Her area of interest are Embedded System, Image Processing and Digital Signal Processing.



K. Gerard Joe Nigel, Assistant Professor from Karunya University, completed Bachelor of Engineering in Electronics And Instrumentation in Karunya University, Coimbatore and Master of Engineering in Control and Instrumentation in Sathiyabama University, Chennai Currently pursuing Ph.D in Anna University.

His area of Interest are Control system, Embedded System and Instrumentation. He has published 8 international conferences.



S. Prabakar received a BE in Instrumentation and Control Engineering from Madurai Kamaraj University, Madurai and a ME in Medical Electronics, College of Engineering Guindy, Anna University Chennai, India in 1999 and 2005 respectively and is currently pursuing Ph.D. degree in the faculty of Electrical and Electronics Engineering at Anna University, Chennai.



He has published around 21 technical papers in reputed National and International Journals and Conferences. He is a Member of IEEE, Life member of Indian Society for Technical Education (ISTE) and Biomedical Engineering Society of India. He is currently an Assistant Professor at Karunya University, Coimbatore, India. His research interests include Medical Image/Video Processing, Bio Signal Processing, Bio-Modeling, Evolutionary Computing, and Virtual Bio Instrumentation.