

# Designs of Micro-Strip Band Pass Filter for L Band Frequency

K.Gowthami, S.Janci Priya, S.Kiruba, S.Maheswari

**Abstract**— In this paper we propose a strip line Bandpass filter for 2.4 GHz application using Advanced design software. The filter is operated at L band frequency range in 2.4 GHz for various microwave applications & the filter is design on Roger Duroid 5880(tm) substrate with dielectric constant of 2.2, with dimension conductor thickness 0.035 mm and substrate height 0.787 mm. The proposed filter is design at a center frequency of 2 GHz. Simulation results show that the filter operation is optimum over the frequency range 1.8 GHz to 2.6 GHz which is best in this range. In this paper, band pass filter order  $n=3$  development with the assistance of the Richards-Kuroda Transformation method is used.

**Index Terms**— chebyshev bpf, Strip-line, ADS Software tool, Roger Substrate, L Band Spectrum, S Parameters

## I. INTRODUCTION

The rapid growth in commercial microwave communication systems had been developed. Hence microstrip technology play important role in many RF or Microwave applications. Emerging application such as wireless communication continue to challenge RF/Microwave filters with ever requirement higher performance, smaller size, lighter weight and lowest cost.

The Chebyshev filters are used to separate one band of frequencies from another. Although they cannot match the performance of the windowed-sinc filter, they are more than adequate for many applications. The primary attribute of Chebyshev filters is their speed, typically more than an order of magnitude faster than the windowed-sinc. This is because they are carried out by *recursion* rather than *convolution*. The design of these filters is based on a mathematical technique called the *z-transform*. This chapter presents the information needed to *use* Chebyshev filters without wading through a mire of advanced mathematics.

The Chebyshev response is a mathematical strategy for achieving a faster *rolloff* by allowing *ripple* in the frequency response. Analog and digital filters that use this approach are called *Chebyshev filters*. For instance, analog Chebyshev filters were used in for analog-to-digital and digital-to analog conversion. These filters are named from their use of the *Chebyshev polynomials*, developed by the Russian mathematician Pafnuti Chebyshev (1821-1894). This name has been translated from Russian and appears in the literature with different spellings, such as: Chebychev, Tschebyscheff, Tchebysheff and Tchebichef.

**Manuscript received April, 2014.**

**K.Gowthami**, Department of ECE V.S.B. Engineering College, Karur, Tamilnadu, India

**S.Janci priya**, Department of ECE V.S.B. Engineering College, Karur, Tamilnadu, India

**S.Kiruba**, Department of ECE V.S.B. Engineering College, Karur, Tamilnadu, India

**S.Maheswari**, Department of ECE V.S.B. Engineering College, Karur, Tamilnadu, India

Chebyshev filters with passband ripples of: 0%, 0.5% and 20%. As the ripple increases (bad), the roll-off becomes sharper (good). The Chebyshev response is an optimal tradeoff between these two parameters. When the ripple is set to 0%, the filter is called a maximally flat or Butterworth filter.

The wavelength of UHF bands are shortest than VHF. The advantages UHF shortest wavelength a suitable for use on the rugged terrain or inside of a building which signal easier to transfer and find the ways to pass through on it. But for VHF have a longer wavelength and it can make signal transmit further under ideal condition. In general, lower radio frequencies are better when compare to longer range using in any electronics application. For design of Chebyshev filter into radio communication applications, the important consideration includes type of elements circuit. The lumped elements circuit can work efficiency at lower frequency UHF because the wavelength will decrease to short on higher frequency and while for distributed elements suitable operate at higher frequency and wavelength will become too larger when into lower frequency range.

In this paper, Chebyshev filter are development into VHF range portable 2 radio application by allow the desired frequency signal to pass through antenna and attenuate the higher signal frequencies and to reduce the minimal losses. Minimal losses on signal transmission reduce energy consumption during communication thus making this product potentially invaluable for signal transmission on regions whereby a power source is difficult to locate. To achieve better performance, the design of Chebyshev is concentrate on lumped elements compare to distributed elements. The two ways radio experience harmonic produced by the transmitter and entering the receiver. These will damage the receiver circuit. In order to solve this, a bandpassfilter is to be employed such that it will attenuate the harmonic signal and allow the wanted signal to pass through antenna with minimum losses. Chebyshev filter are devices of combination of two -port network which used on function as to control the certain frequency signal repossesses within a system by only allowing the transmissions of specify frequencies signal pass through in pass band and discriminate the unwanted frequency in the stop band.

## II. LUMPED COMPONENT REALIZATION OF FILTER

The passive (LC) filters work quite well at frequencies up to a few hundred megahertz. Beyond this range, components deviate significantly from anything close to ideal. The microwave filters are based on distributed parameters rather than lumped inductors and capacitors. For low-power applications, stripline and microstrip filters are extensively used because of their low cost and repeatability.



For high-power requirements, waveguide structures are utilized. Microstrip line is bimetallic which contain two metallic surface separated with a small distance, having a dielectric material between them. There are one metallic surface having the filter geometry and other surface having the ground plane at which the reflection of wave is occurs.

Richards' transformation is use for realizing the filter the conversion of lumped element filters into distributed filters. In this the short and open circuited transmission line stubs are use having the length of the order of  $\lambda/4$  or  $\lambda/8$ . Kuroda's identities are also use in realization of filter, it allow the transformation of series stubs into shunt stubs and vice versa. This is an exact transformation and not an approximation. For obtaining the better results of filter combination of both techniques as described previous is used.

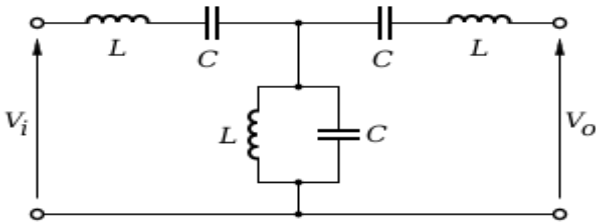


Fig 1. Band pass filter equalization circuit

### III. DESIGN METHODOLOGY

The design of microstrip bandpassfilters involves two main steps. The first one is to select an appropriate bandpass prototype, The choice of the type of response, including pass band ripple and the number of reactive elements, will depend on the required specifications. The element values of the bandpass prototype filter, which are usually normalized to make a source impedance  $g_0 = 1$  and a cutoff frequency  $\Omega_c = 1.0$ , are then transformed to the L-C elements for the desired cutoff frequency and the desired source impedance, which is normally 50 ohms for microstrip filters. The next main step in the design of microstrip bandpass filters is to find an appropriate microstrip realization that approximates the lumped element filter.

#### A. Calculation of the Dimensions of the Filter:

Order of the filter:

$$LA(\omega) = 10 \log_{10} \{1 + \varepsilon (\omega / \omega_c) 2N\}$$

Where

$$\varepsilon = \{\text{Antilog}_{10} LA/10\} - 1$$

#### B. Prototype Values of the bandpass Filter:

The prototype values of the filter is calculated using the formula given by

$$g_1 = \frac{2\alpha_1}{\gamma}$$

$$g_k = \frac{4\alpha_k - 1\alpha_k}{bk - 1gk - 1}$$

#### C. Lumped Model of the Filter

The Lumped values of the Bandpass filter after frequency and impedance scaling are given by

$$Ck' = Ck / R_0 \omega_c \text{ and } Lk' = R_0 Lk / \omega_c \text{ where } R_0 \text{ is } 50\Omega$$

#### D. Distributed model of the filter

For distributed design the electrical length is given by

$$\text{Length of capacitance section } (\beta L_c) : Ck Z_l / R_0,$$

$$\text{Length of inductance section } (\beta L_i) : L_k R_0 / Z_l$$

Where  $Z_l$  is the low impedance value,

$Z_h$  is the high impedance value,

$R_0$  is the Source and load impedance,

$\omega_c$  is the desired cutoff frequency

### IV. RESULT AND DISCUSSION

The bandpass filter (transmitter and receiver) operating frequency range is at 2.4GHz, cutoff 2.8 GHz on a substrate that had a dielectric constant of 2.2 and a thickness of .5 mm with the expected simulation result S parameter of software before and after tuning to bandpass filters designed and it is shown as below graph, and for lumped elements capacitor and inductor value per design was done by using ADS software. Tuning method is using in order to perform better simulation result according to specification values required. The method are done by trying change some of parameter values and until make the simulation result close to specification

#### A. Calculation of the Dimensions of the Filter:

The prototype values of the filter is calculated using the formula given by

$$\beta = \ln \left( \coth \frac{Lar}{17.37} \right)$$

$$\gamma = \sinh \left( \frac{\beta}{2n} \right)$$

$$\alpha_k = \sin \left[ \frac{(2k-1)\Pi}{2n} \right]$$

$$bk = \gamma^2 + \sin^2 \left( \frac{k\Pi}{n} \right)$$

$$g_1 = \left( \frac{2\alpha_1}{\gamma} \right)$$

$$g_k = \frac{4\alpha_k - 1\alpha_k}{bk - 1gk - 1}$$

The prototype values for the given specifications of filter are  $g_1 = 1.5963 = C_1$ ,  $g_2 = 1.0967 = L_2$ ,  $g_3 = 1.5963 = C_3$

#### B. Lumped Model of the Filter

The Lumped values of the Bandpass filter after frequency and impedance scaling are given by

$$Ck' = Ck / R_0 \omega_c \text{ and } Lk' = R_0 Lk / \omega_c \text{ where } R_0 \text{ is } 50\Omega$$

The resulting lumped values are given by

$$C_1' = 1.218 \text{ pF}, \quad L_2' = 7.35 \text{ nH},$$

$$C_3' = 2.94 \text{ pF} \quad \text{and} \quad L_4' = 3.046 \text{ nH}$$

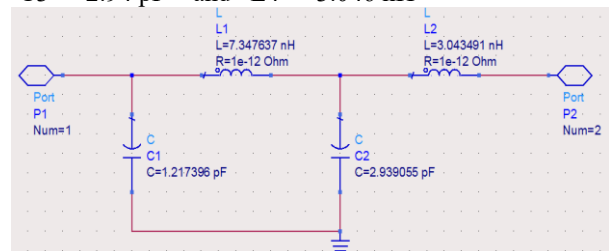


Fig 2. Lumped model of equi\_ripple BPF

Fig 2 show LC combination of equi\_ripple bandpass filter with filter coefficients calculated from prototype model of the bandpassfilter. The input and output terminals are terminated by 50Ω resistance.

The S parameter for port (2,1) is shown in figure 3 which depicts the pass band and the stop band transition for the designed bandpassfilter along with attenuation at pass band and stop band frequencies.

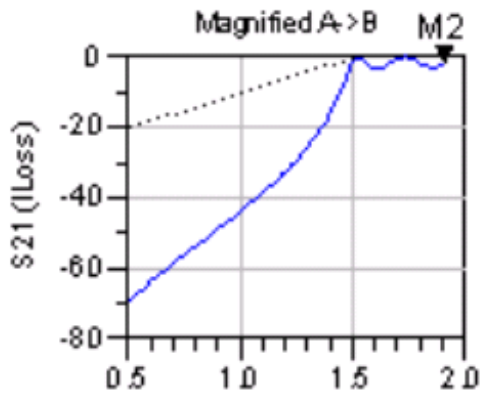


Fig 3. VSWR of S<sub>21</sub> in dB

	Fs1	Fp1	Fp2	Fs2	As	Ap
Input Parameters	5.0dB	1.5dB	2.0dB	2.5dB	20.0	3.0
	CF-Des	CF-Actual	Gain Dev(dB)	MALSB	MA-USB	
Performance	1.750dB	1.750 GHz	8.823	-5.784E-4	-5.784E-4	
	F	S11 (dB)	S21 (dB)	Delay(ns)		

### C. Distributed model of the filter

For distributed design the electrical length is given by  
Length of capacitance section ( $\beta L_c$ ) :  $C_k Z_l/R_0$ ,  
Length of inductance section ( $\beta L_i$ ) :  $L_k R_0/Z_h$

Where  $Z_l$  is the low impedance value,  
 $Z_h$  is the high impedance value,  
 $R_0$  is the Source and load impedance,  
 $\omega c$  is the desired cutoff frequency

If we consider  $Z_l = 10\Omega$  and  $Z_h = 100\Omega$  then  $\beta L_{c1} = 0.153$ ,  
 $\beta L_{i2} = 0.9239$ ,  
 $\beta L_{c3} = 0.3695$  and  $\beta L_{i4} = 0.3827$

Since  $\beta = 2\pi/\lambda$ , the physical lengths are given by

Let substrate used for fabrication be Rogers RO3003(tm) whose permittivity be 3 and permeability be 1. Therefore

$$\beta = \frac{2\pi}{\lambda} = \frac{2\pi}{\frac{c}{f_r \sqrt{\epsilon_r}}} = \frac{2\pi}{\frac{3 \times 10^8}{2 \times 10^9 \sqrt{3}}} = 72.5519$$

$L_{c1} = 2.108$  mm,       $L_{i2} = 12.734$  mm,  
 $L_{c3} = 5.092$  mm and       $L_{i4} = 5.274$  mm.

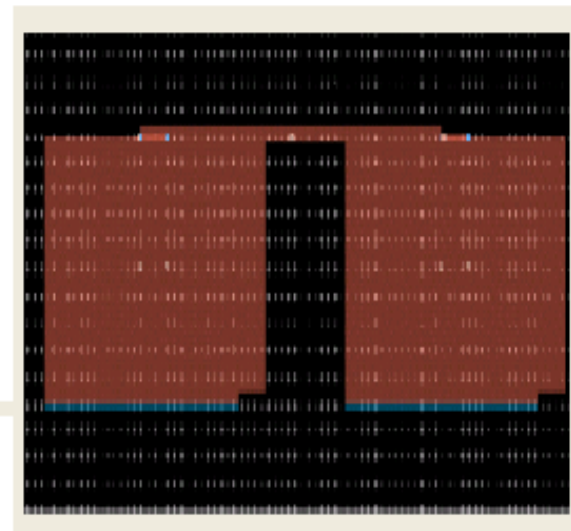


Fig 4. Distributed model of BPF

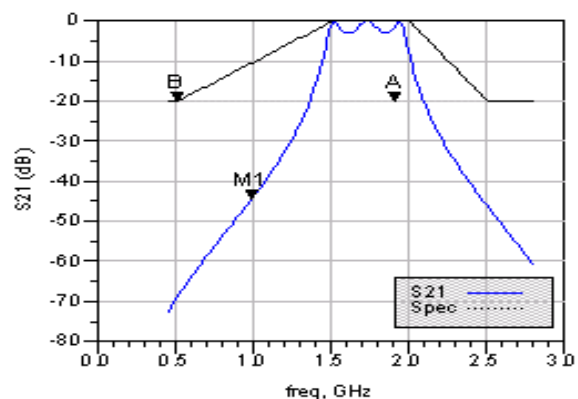


Fig 5. S (1, 2) for distributed BPF

### V. CONCLUSION

From the simulation results, it is noticed that the ADS software simulation show the ideal result of Chebyshev filters is the best and able to perform the better filters response and all the S-parameter value are appropriated to the specification value required for filter design. But when in measurement result of filter response has the shape as bandpass filter. So we conclude that design is not fail. By taking care all precaution a good filter can be designed. Overall, the simulation result and measurement result are agreed well with each other. The design can be further improved in accuracy through using a better technology for better fabrication and more pure substrate and copper that we using in fabrication. Besides, to improve the transition band, which gives us a better and narrower slope, we can increase the order of the filter, but in other way round, it also will increase the cost of the filter. In other words, to improve the cost effectiveness, we can reduce the order of the filter as well.

### REFERENCES

1. Li Zhongshen, "Design and Analysis of Improved Chebyshev BandpassFilter," The Eighth International Conference on Electronic Measurement and Instruments, pp. 1729-1732, 2007.
2. Anju and Mamta Katiyar, "Design of Chebyshev and Chebyshev 1 BandpassFilter for Equalized Group Delay," International Journal of Advanced Research in Computer Science and Software Engineering, vol. 2, Issue 5, May 2012.I.



3. David M. Pozar., Microwave Engineering, 3rd Edition, John Wiley & Sons, Inc. Canada.2005, pp422-459.
4. Roman Kaszynski and Jacek Piskorowski, "New Concept of Delay-Equalized BandpassChebyshev Filters," IEEE Symposium on Industrial Electronics and Application (ISIEA 2009), vol. 1, pp. 171-175, 9-12 July, 2006.
5. Les Besser and Rowan Gilmore, "Filters and Resonant Circuit," In: Practical RF Circuit Design for Modern Wireless System, Passive circuit in Systems, voll,
6. Anju and Mamta Katiyar, "Design of Chebyshev and Chebyshev 1 BandpassFilter for Equalized Group Delay," International Journal of Advanced Research in Computer Science and Software Engineering, vol. 2, Issue 5,May 2012.
7. R. Levy, R.V.Snyder and G. Matthaei, "Design of Microwave Filters," IEEE Transactions On Microwave Theory, vol.50, pp.783-793, March 2002.
8. Vadim Kim, "How to Design 10 kHz filter (Using Chebyshev filter design)," PhD Thesis, Brandeis University, US, 1998.M. Young, The Technical Writer's Handbook. Mill Valley, CA: University Science, 1989.

### AUTHORS PROFILE



**S.Janci Priya** Pursuing Her Bachelor's Degree In Electronics And Communications Engineering In The Year 2014, From Anna University Chennai. Her Area Of Interest Is Antenna And Wave Propagation. She Had Done A Project In Charging A Battery Through High Frequency Waves.



**S.Kiruba** Pursuing Her Bachelor's Degree In Electronics And Communications Engineering In The Year 2014, From Anna University Chennai. Her Area Of Interest Is Antenna And Wave Propagation. She Had Done A Project In Charging A Battery Through High Frequency Waves.



**K.Gowthami** Pursuing Her Bachelor's Degree In Electronics And Communications Engineering In The Year 2014, From Anna University Chennai. Her Area Of Interest Is Digital Electronics. She Had Done A Project In Charging A Battery Through High Frequency Waves.



**S.Maheshwari** Pursuing Her Bachelor's Degree In Electronics And Communications Engineering In The Year 2014, From Anna University Chennai. Her Area Of Interest Is Vlsi Design. She Had Done A Project In Charging A Battery Through High Frequency Waves.