

Dense Wavelength Division Multiplexing using Dispersion Fibre with Erbium Doped Fiber Amplifier



T.Kavitha and Reshma Pavani

Abstract: Dense wavelength division multiplexing is used in various broadband communications. It combines information from distinct sources on an optical fiber, each signal being transmitted simultaneously on its own distinct light wavelength. Radio over fibre is a hybrid system that has both fibre optic link and free space radio path. This paper aims to evaluate the performance of the system using Erbium Doped Fiber Amplifier, Single Mode Fibre and Dispersion compensating Fibre. Single beam of light is passed by the SMF and is used for long distance signal transmission. DCF is used to reduce the dispersion in the optical signal. EDFA reduces the degradation of the signal by cancelling the effect of attenuation. It is an optical repeater used to raise the intensity of the optical signal. Mach – Zehnder modulator is used for the modulation. The simulation is carried out by using optisystem software version 15.0. Various parameters like Q-factor, BER pattern, threshold, minimum BER are compared and estimated.

Keywords: Dense wavelength division multiplexing, Dispersion compensated fibre, Erbium doped fibre amplifier, Optisystem, Single mode fibre

I. INTRODUCTION

Wavelength division multiplexing (WDM) in fiber optic communication is a technology that multiplexes various light carrier signals on a particular optical fiber using distinct laser light wavelength to perform distinct signals. WDM is frequently applied to an optical carrier called wavelength. This is simply conventional because wavelength and frequency convey the same data [1][2]. A WDM scheme utilizes a transmitter multiplexer to join together the various signals and a receiver demultiplexer to divide them apart. With the correct fiber type, a device can be installed concurrently and can operate as an optical add drop multiplexer [3]. Erbium doped fiber amplifier (EDFA) are widely used in WDM – DWDM technology that improves optical network ability with optical amplification and works efficiently at high speed without affecting any cost. The signal is enhanced by EDFA's doping ion interaction [4][5] The primary feature is that its working wavelength is 1550nm, showing the

smallest attenuation compared to other optical transmission windows. EDFA's technical features include efficient pumping, high gain, low noise, high output power, minimum inter channel interference and low distortion.[6]

In WDM transmitted channels the power level is unbalance therefore equalization of gain in electronic equipment is done. So error free signal is transmitted through the optical fiber. There are many ways to achieve optical flat spectral gain such as controlling the power of the pump, correctly selecting fiber length, varying input power and properly selecting the characteristic of the optical notch filter. In radio over fiber (ROF) the radio frequency signal is modulated by the light carrier signal. It is an attractive technology with low loss and high bandwidth. The installation and maintenance cost is reduced by properly designing the antenna system.[8-10] The primary objective of communication system is to improve transmission distance. In high capacity optical communication system, dispersion and loss are the primary factors causing signal degradation [11][12]. Dispersion leads an optical pulse's time slot and profile to alter during propagation, causing intersymbol interference and thus causing bit error. Dispersion is typically evaluated as time spread per distance travelled. The efficiency of single mode fibers is mainly restricted by chromatic dispersion, which happens because the glass index differs slightly based on the light wavelength, and light from real optical transmitters generally has non – zero spectral width (owing to modulation). To address the degradation impacts, the EDFA amplifiers can be used to decrease or cancel the attenuation impact. The dispersion compensation methods can be used to mitigate the distortion caused by dispersion[13][14] This paper examines the dispersion compensation scheme in the WDM taking into account the different kinds of nonlinear effects and the effect of EDFA on the optical transmission equation.

II. PROPOSED SYSTEM:

The advanced optical component WDM multiplexer is commonly used in optical connections. By interconnecting distinct channels, it can improve connectivity and bandwidth of processing system. One of the three techniques is used in most WDM multiplexers: arrayed wave guide grating (AWG), filter and dispersive component, diffraction grating. Some filter based multiplexers show elevated insertion losses for devices with multiple channels, making them unsuitable for multimode and bi- directional transmission applications.

Manuscript published on 30 September 2019.

*Correspondence Author(s)

T.KAVITHA, Associate Professor, ECE, Vel Tech Rangarajan Dr.Sagunthala R & D Institute of Science and Technology, Chennai, India.

Reshma Pavani, ECE, Vel Tech Rangarajan Dr.Sagunthala R & D Institute of Science and Technology, Chennai, India.

© The Authors. Published by Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP). This is an [open access](https://creativecommons.org/licenses/by-nc-nd/4.0/) article under the CC-BY-NC-ND license <http://creativecommons.org/licenses/by-nc-nd/4.0/>.

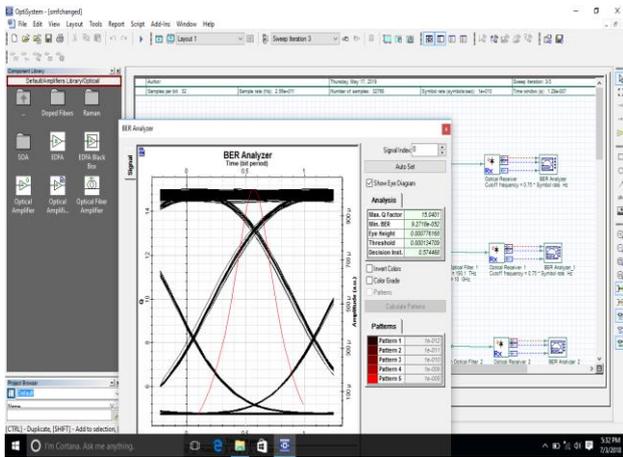


Figure 4 Eye Diagrams of SMF and DCF

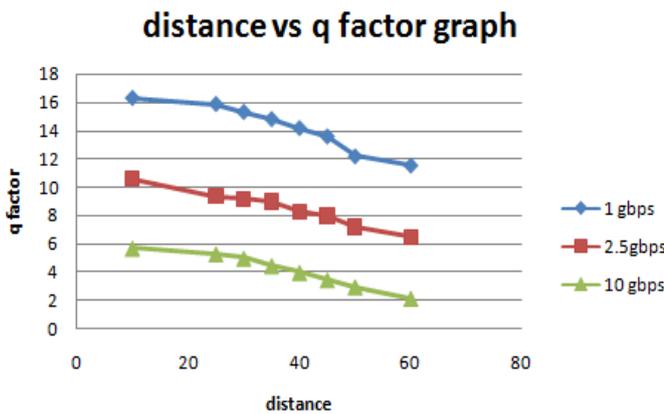


Figure 5 Distance vs Q-factor graph for SMF and EDFA

C. Simulation Results of SMF, DCF and EDFA

Simulation results of SMF, DCF and EDFA are shown in the graphs below. As explained earlier, EDFA is used as a regenerator which is used to boost the optical signal. The performance of the system with EDFA will be higher when compared to the other two systems without EDFA. The Dispersion compensation filter also used to reduce the dispersion in the signal. So, the performance of the system with EDFA will be higher. The Eye diagram of SMF, DCF and EDFA are shown in the figure 6 and the distance vs Q-factor graph is shown in the figure 7.

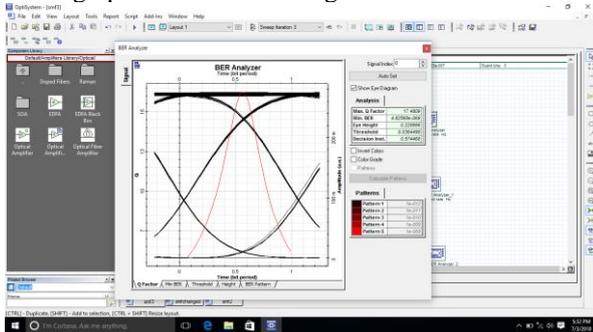


Figure 6 Eye Diagrams of SMF, DCF and EDFA

distance vs q factor graph

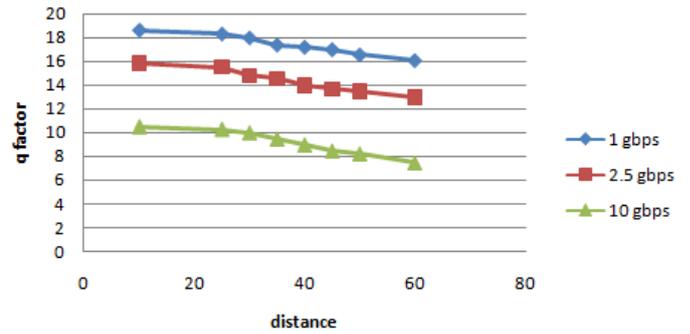


Figure 7 Distance vs Q-factor graph for SMF, DCF and EDFA

D. Optical Spectrum Analyzer

The Optical Spectrum Analyzer gives the energy distribution in the frequency domain in relative units. It is used in the system design. The graph shown in the figure 8 shows the frequency distribution.

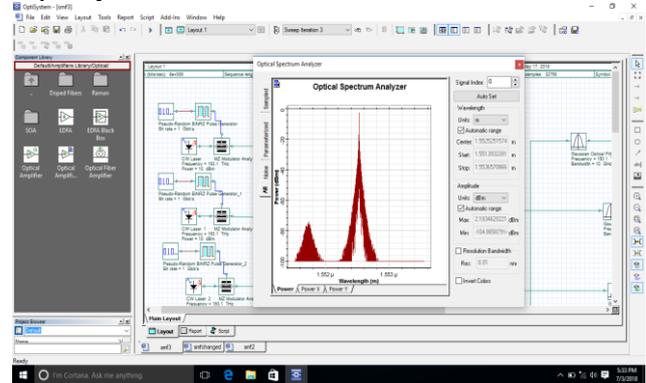


Figure 8 Optical Spectrum Analyzer graph

IV. CONCLUSION:

SMF span is greatly affected by the effect of degradation factors. The efficiency of the DWDM scheme improves with the use of dispersion compensation fiber and EDFA. The graph for Q-factor is compared for different frequency levels. By comparing the eye diagrams and Q-factor system with EDFA has high performance. EDFA greatly increases the performance of the fiber optic system.

REFERENCES

- Shivani Radha Sharma, Tanvi Sood, "Gain Flattening of EDFA using Hybrid EDFA/Raman Amplifier with Reduced Channel Spacing" International Journal of Engineering Development and Research, Vol. 3, Issue 3, pp: 1-7, 2015.
- AnuSheetal, Ajay K. Sharma, R.S. Kaler, "Simulation of high capacity 40Gb/s long haul Dense wavelength division multiplexing (DWDM) system using different modulation formats and dispersion compensation schemes (DCF) in the presence of Kerr's effect", Optic Optics, Elsevier, Vol.121. pp: 739-749, 2010.
- AmitPatni, Durgesh Kumar, "simulation of Gain Flattened 32 channels EDFA DWDM Optical System" IEEE International Conference on Recent Advances and Innovations in Engineering (ICRAIE-2016), December 23-25, 2016.

4. Urvashi Bansal and Kamaldeep Kaur, "1.6 Tbps High Speed Long Reach DWDM System by incorporating Modified duo binary Scheme", International Journal of Current Engineering and Technology, Vol.4, No.6, pp. 4047-4051, Dec 2014.
5. Rajbir Singh, Manoj Ahlawat, Deepak Sharma, "A Review on Radio over fiber communication System", International Journal of Enhanced Research in Management & Computer Applications, Vol. 6, No. 4, pp: 23-29, April-2017.
6. Farah Diana Binti Mahad and Abu Sahmah Bin Mohdsupa, 'EDFA Gain Optimization for WDM System', ELEKTRIKA, Vol. 11, pp: 34-37, 2009.
7. Deepika Verma and SantoshMeena, "Flattening the Gain in 16 Channel EDFA-WDM System By Gain Flattening Filter", Sixth International Conference on Computational Intelligence and Communication Networks, pp: 174-177, 2014.
8. GauravSoni and RupinderjitKaur, "Performance Analysis of WDM Link Using Dispersion Compensating Fiber at Different Wavelengths", IEEE International Conference on Contemporary Computing and Informatics (IC3I), 2014.
9. M. M. Ismaila, M.A.Othmana, Z.Zakariaa, M.H. Misrana, M.A. MeorSaida, H.A. Sulaimana, M.N. ShahZainudina, M.A. Mutaliba, "EDFA-WDM Optical Network Design System", Elsevier Procedia Engineering, Vol. 53, pp: 294-302, 2013.
10. Inderpreet Kaur and Neena Gupta, " A Novel Approach for Performance of DWDM Systems using TDFA EDFA Configuration", International Journal of Electronics and Communication Technology, Vol.1, Issue 1, December 2010.
11. Kamalbir Kaur, Kulwinder Singh, "Performance analysis of 16 – channel WDM system using EDFA", International Journal of Engineering and Innovative Technology (IJEIT) Volume 3, Issue 6, December 2013.
12. O.Vassilieva, T. Hoshida S.Choudhary, R. Pecqueur, K.Yamada, H. Kuwahara, "Optimal 40 Gb/s modulation formats for spectrally efficient long-haul Reach DWDM systems", Journal of Light Wave Technology, Vol.20, No. 12, pp: 1989-1996, 2002.
13. Chakkour Mounia, AghzoutOtman, Ait Ahmed Badiaa, Chaoui Fahd, Alejos Ana Vazquez, El Yakhouloufi Mounir, "Gain Flatness and Noise Figure Optimization of C- Band EDFA in 16-channels WDM System using FBG and GFT", International Journal of Electrical and Computer Engineering (IJECE), Vol.7, No. 1, pp: 289-298, February 2017.
14. Warsha Balani, Mniash Saxena, "simulation and Analysis of GFT at WDM MUX Bandwidth of 13GHz", International Journal of Computational Intelligence and Informatics, Vol. 2 No, January-March 2013.

AUTHORS PROFILE



Thandapani Kavitha received her Bachelor of Engineering degree in ECE from Madurai Kamaraj University, Madurai, Tamilnadu, India in 1999. Then She obtained her Master Degree in Applied Electronics from Anna University, Chennai, Tamilnadu, India in 2004 and completed, Ph.D in Information Technology from Anna University, Chennai in 2014. Currently She is working as Associate Professor in Veltech Rangarajan Dr.Sagunthala R & D Institute of Science and Technology, Chennai, Tamilnadu, India.. Her research interests are Modeling of Multigate MOSFETs, Optical Networking, Wirele communication, VLSI.



Reshma pavani has completed Electronics and Communication Enginerring in Veltech University.Currently she is working in Capgemini. Her area of interest is optical communication, VLSI and wireless communication