

A Wideband Microstrip Patch Antenna with Integrated Circular Slot for RF Energy Harvesting

Himanshi Sharma, Laxmi Shrivastava

Abstract: This paper presents a wideband Microstrip patch antenna with integrated circular slot for radio frequency energy harvesting. The antenna consists of circular slot and stubs with a coaxial feed. The proposed antenna consists of four symmetric gap. It is designed on FR4 lossy epoxy substrate material for 2.65GHz frequency allocated for Wi-max application. Circular slot are integrated inside a square patch of proposed antenna which helps to increase the bandwidth of antenna.

Keywords: Circular slots, RF energy harvesting (RFEH) system, Microstrip patch antenna.

I. INTRODUCTION

RFEH is further connected more researchers as an alternate resolution to temporary battery life [1]. Energy harvest could be a promising technology which will like millions of radio transceiver all over the world [2]. Radio transceiver like cell phones, television, broadcast stations are radio frequency energy sources. Energy which is harvested from the environment can be reused [3]-[4]. The RFEH includes an antenna, a matching circuit and a rectifier. Diagram of RFEH system is shown in given figure 1. In harvesting system antenna is implemented at receiver end and it takes electromagnetic waves as its input, a rectifier circuit [5].

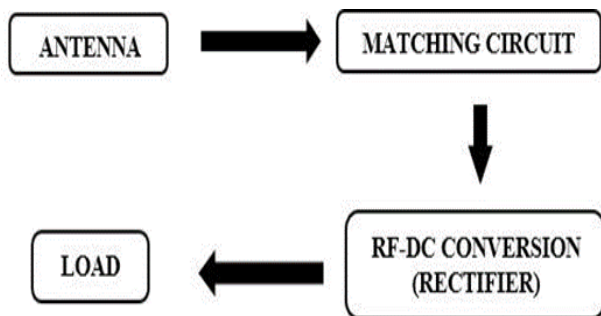


Fig. 1 Diagram of RFEH System

Wi-max is application which is used at 2.65 GHz and it is a service of wireless broadband communication [6]. Wi-max is for the WAN(wide area network) and is much faster, WAN connects several LANS (local area network).The RF signal range from 3KHz to 300GHz be the source or medium to any radio frequency harvesting system. RFEH have found their applications in forms like wireless charging system, wireless sensor network etc [6]-[9]. RF energy harvest home technique relies on the extracting energy from close that is EM waves radiated from completely different sources of communication [3].

II. ANTENNA DESIGN

A Wideband Microstrip patch antenna with integrated circular slot is designed, the cross sectional view with coaxial feed technique of proposed circular slots antenna is shown in figure 2. Square microstrip patch is placed in the x-y plane. Size of microstrip patch is 24mm × 24mm. Co axial feed is placed along the negative y axis.

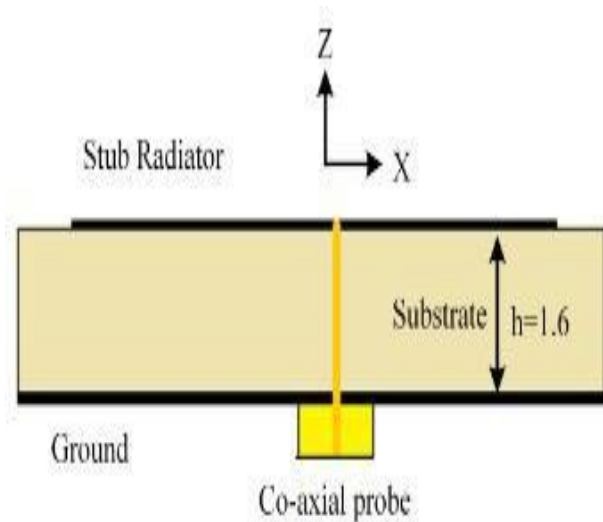


Fig. 2 Cross sectional view

Revised Manuscript Received on September 02, 2019.

Himanshi Sharma, Department of Electronics, Madhav Institute of Technology and Science, Gwalior, India.

Dr. Laxmi Shrivastava, Department of Electronics, Madhav Institute of Technology and Science, Gwalior, India

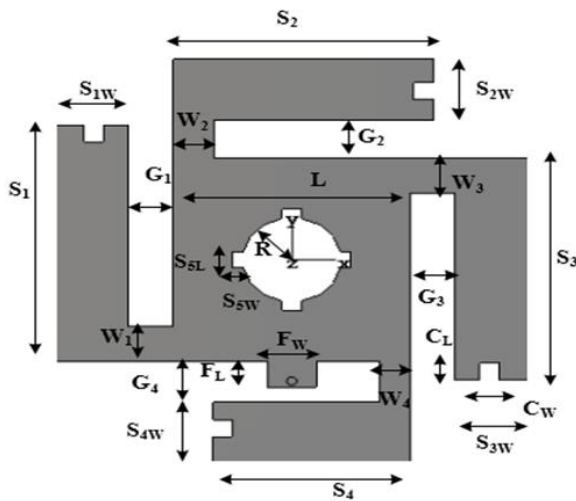


Fig. 3 Circular slots radiator

Parameters	Dimensions (mm)	Parameters	Dimensions (mm)
S ₁	28	C _w	2
S ₂	26.3	C _L	2
S ₃	26.3	L	12
S ₄	20	R	5
S _{1w}	7.3	S _{5L}	2
S _{2w}	7.3	S _{5W}	4
S _{3w}	7.3	W ₁	4.1
S _{4w}	6.9	W ₂	4.1
G ₁	4.9	W ₃	4.1
G ₂	4.9	W ₄	3.1
G ₃	4.9	F _L	3.1
G ₄	4.9	F _w	5

Table 1 - Circular slot antenna design dimensions

Four symmetric length stubs are introduced and integrated with square patch with symmetric gaps is shown in figure 3. The length of stubs $S_1 \neq S_2 = S_3 \neq S_4$. Along the negative y-axis of square patch a feeding stub is integrated with width F_w and length F_L . Parameter inside the square patch of circular slots are S_{5L} , S_{5W} , R . All designing dimensions parameter of antenna is shown in table 1.

III. RESULTS & DISCUSSION

Figure 4 shows the antenna without circular slots and figure 3 shows the antenna with circular slots, without using slots the antenna is not able to achieve the proper results as its return loss is less than -10dB and it does not have the bandwidth, whereas the presence of slots gives better bandwidth of 200MHz and return loss is also more than -10dB with the frequency band of 2.65GHz, which shows that the antenna is equal in shape and size but with slots it gives proper results.

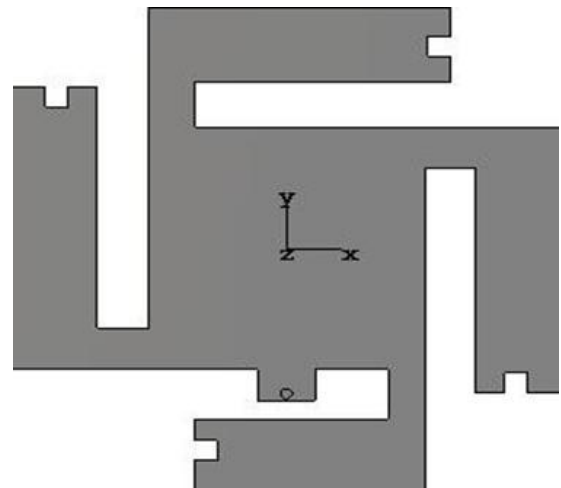


Fig. 4 Antenna without slots

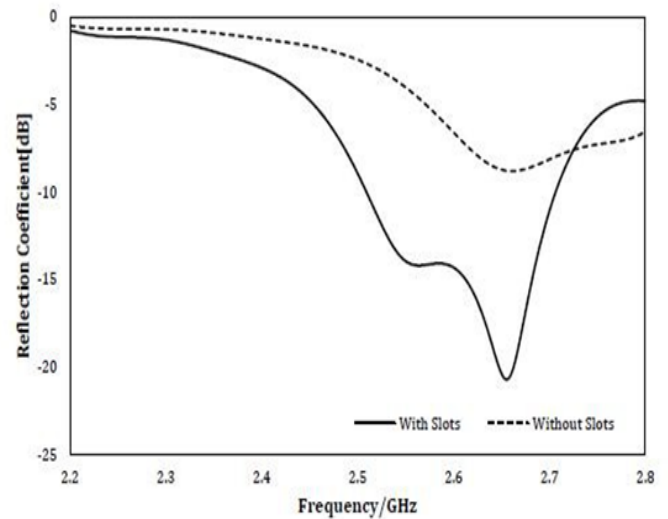



Fig. 5 Compare graph of both the antenna

The simulated S_{11} (Reflection coefficients) of both the proposed antenna (without slots and with slots) is shown in figure 5 which shows that antenna is more efficient with slots, the antenna covers 2.65GHz frequency band which is useful for RFEH prospective. The designed antenna is manufactured and experimentally tested to verify the simulations result, the picture of fabricated antenna is given in figure 6. It is printed on a low cost commercially of obtainable FR-4 lossy substrate ($\epsilon_r = 4.3$, $\tan \delta = 0.025$, $h = 1.6\text{mm}$).




Fig. 6(a) Front view of fabricated (b) Back view of fabricated antenna

Figure 7 shows simulated radiation pattern of antenna in the x-z planes and y- z planes ($\phi=0^\circ$ and $\phi=90^\circ$) at resonating band of antenna. At $\phi=0^\circ$ the radiation pattern is unidirectional and at $\phi=90^\circ$ the radiation pattern is also unidirectional with some distortion, the radiation pattern may be distorted sometimes due to adaptors or connectors which are used in the measurement it may pick up the spurious radiation from unwanted direction. Figure 8 shows simulated gain of antenna, the simulated gain is suitable for RF signal harvesting. Figure 9 shows the simulated and measured result of proposed antenna, the performance of wideband microstrip patch antenna was measured on FS315 spectrum analyzer, it is clearly observed that there is small discontinuity between simulated and measured result, this is because of cable losses and environmental effects.

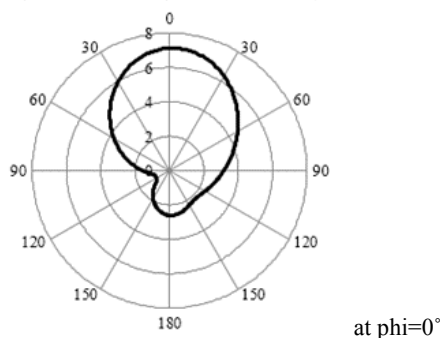

at $\phi=0^\circ$

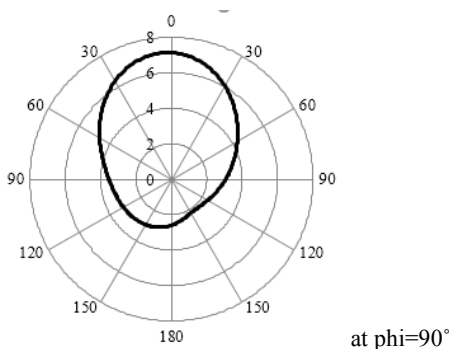

at $\phi=90^\circ$

Fig. 7 E-field pattern

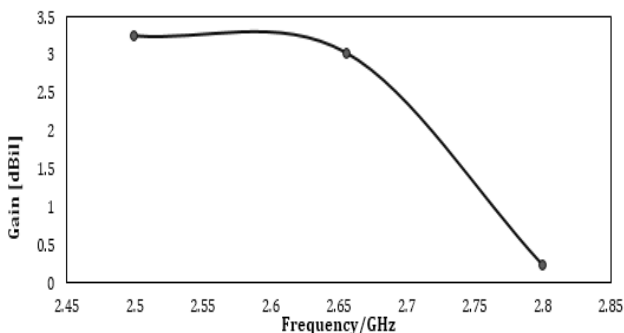


Fig. 8 Gain of proposed antenna

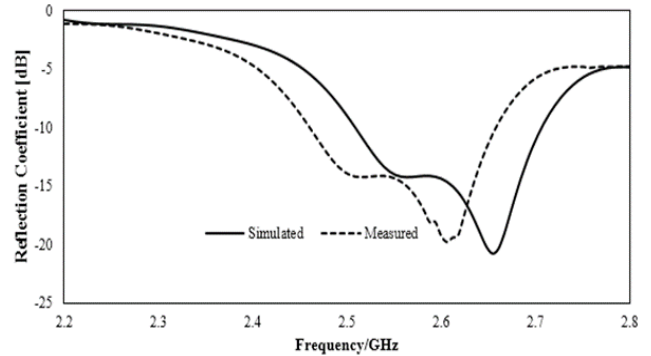


Fig. 9 Reflection coefficients of simulated and measured result of proposed antenna

III. RECTIFIER DESIGNING OF ANTENNA

RF energy system receives signal from RF transmission and receiving sources. It contains an antenna that receives or transmits the radiated power from the close RF sources [15]. The rectifier will receive EM signals and convert it for the conversion of RF energy into DC energy. The RF to DC conversion strength depends on the i/o power of the rectifier. Maximum input power more is the DC conversion strength of the rectifier [10-14]. For converting RF power into DC power, a full-wave bridge rectifier is used. Voltage doubler is used for the increment of DC power input signals [13]. Diode 1N4148 is a silicon diode which is operated at high frequency and has a fast switching response. The circuit diagram of the FWBR (full-wave bridge rectifier) is shown in Figure 10. Parameters used in the bridge rectifier are diodes, capacitors, and a load as an LED.

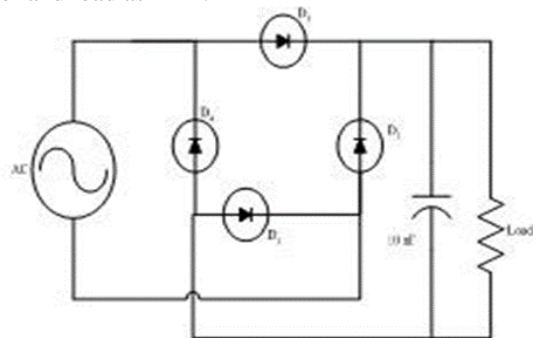


Fig. 10 Diagram of FWBR

Electromagnetic waves are transmitted by an antenna which is taken as an input for the FWBR circuit. Diode D_1 is forward biased and D_2 is also forward biased in the positive half cycle, the diode D_1 is forward biased from the positive half cycle and diode D_2 is forward biased from the negative half cycle and vice versa [12]. The simulated result of the bridge rectifier confirms that the elements chosen within the rectifier are capable of operating within the input frequency range. RF to DC conversion depends on the i/o power at the rectifier terminal. Since the conversion efficiency can be determined from the equation:

$$\eta = P_{DC} / P_{RF} \times 100 \quad (1)$$

The maximum converted RF to DC power of the proposed work is 42% as shown in the figure below.

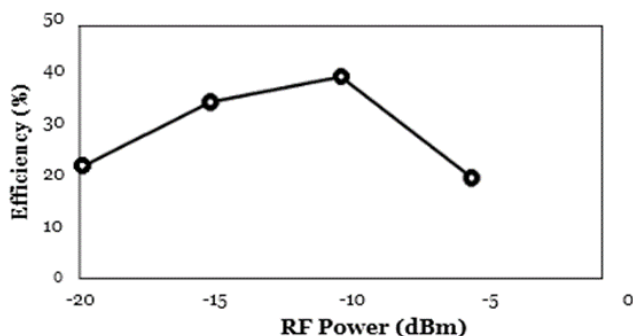


Fig. 11 RF-DC Conversion

The voltage measured across the load of the rectifier by glowing the LED is shown in figure 12. Cellular GSM mobile phone radiates the RF signal. Mobile phone is kept near the rectifier circuit. The voltage measure across the load is 0.560mv. The load voltage is measured by voltmeter across the terminal.

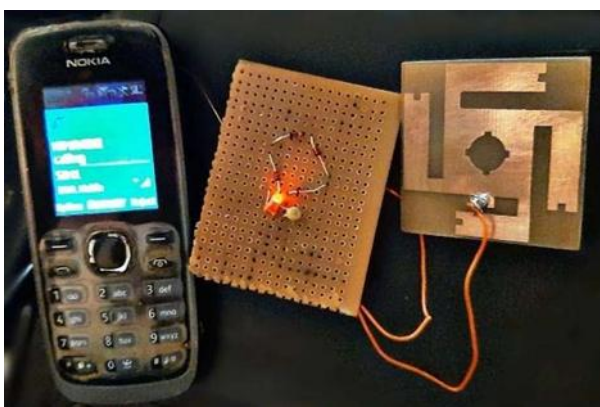


Fig. 12 RF energy harvesting by glowing LED

V. CONCLUSION

A Wideband Microstrip patch antenna with integrated circular slot is designed on FR-4 substrate for RFEH and bandwidth enhancement applications. The band 2.65 GHz response of the antenna covers the frequency range of same, design includes circular slots for reducing the size of the patch antenna and increasing the bandwidth. The small size of antenna and radiation pattern helps in energy harvesting applications. For further research in this proposed work, bandwidth enhancement for same structure is required.

REFERENCES

1. X. Lu, P. Wang, D. Niyato, D. I. Kim and Z. Han, "Wireless Networks With RF Energy Harvesting: A Contemporary Survey," in *IEEE Communications Surveys & Tutorials*, vol. 17, no. 2, pp. 757-789, Nov. 2015.
2. S. B. Vignesh, N. Nasimuddin, and A. Alphones, "Stubs-integrated-microstrip antenna design for wide coverage of circularly polarised radiation," *IET Microwaves, Antennas & Propagation*, vol. 11, no. 4, pp. 444-449, Mar. 2017.
3. C. Song, Y. Huang, P. Carter, J. Zhou, S. Yuan, Q. Xu, and M. Kod, "A Novel Six-Band Dual CP Rectenna Using Improved Impedance Matching Technique for Ambient RF Energy Harvesting," *IEEE Transactions on Antennas and Propagation*, vol. 64, no. 7, pp. 3160-3171, Jul. 2016.
4. V. Palazzi, J. Hester, J. Bitto, F. Alimenti, C. Kalialakis, A. Collado, P. Mezzanotte, A. Georgiadis, L. Roselli, and M. M. Tentzeris, "A Novel Ultra-Lightweight Multiband Rectenna on Paper for RF Energy Harvesting in the Next Generation LTE Bands," *IEEE Transactions on*

5. B. L. Pham and A.-V. Pham, "Triple bands antenna and high efficiency rectifier design for RF energy harvesting at 900, 1900 and 2400 MHz," 2013 IEEE MTT-S International Microwave Symposium Digest (MTT), Jun. 2013.
6. S. Shen, C.-Y. Chiu, and R. D. Murch, "A Dual-Port Triple-Band L-Probe Microstrip Patch Rectenna for Ambient RF Energy Harvesting," *IEEE Antennas and Wireless Propagation Letters*, vol. 16, pp. 3071-3074, Oct. 2017.
7. Khemar, A. Kacha, H. Takhedmit, and G. Abib, "Design and experiments of a dual-band rectenna for ambient RF energy harvesting in urban environments," *IET Microwaves, Antennas & Propagation*, vol. 12, no. 1, pp. 49-55, Jan. 2018.
8. M. Aboualalaa, A. B. Abdel-Rahman, A. Allam, H. Elsadek, and R. K. Pokharel, "Design of a Dual-Band Microstrip Antenna With Enhanced Gain for Energy Harvesting Applications," *IEEE Antennas and Wireless Propagation Letters*, vol. 16, pp. 1622-1626, Jan. 2017.
9. M. Fantuzzi, D. Masotti, and A. Costanzo, "A Novel Integrated UWB-UHF One-Port Antenna for Localization and Energy Harvesting," *IEEE Transactions on Antennas and Propagation*, vol. 63, no. 9, pp. 3839-3848, Sep. 2015.
10. M. Arrawatia, M. Baghini, and G. Kumar, "Broadband Bent Triangular Omnidirectional Antenna for RF Energy Harvesting," *IEEE Antennas and Wireless Propagation Letters*, pp. 1-1, Apr. 2015.
11. M. Arrawatia, M. S. Baghini, and G. Kumar, "Differential Microstrip Antenna for RF Energy Harvesting," *IEEE Transactions on Antennas and Propagation*, vol. 63, no. 4, pp. 1581-1588, Apr. 2015.
12. R. Gonçalves, N. B. Carvalho, and P. Pinho, "Small antenna design for very compact devices and wearables," *IET Microwaves, Antennas & Propagation*, vol. 11, no. 6, pp. 874-879, May 2017.
13. B. Garg and P. K. Singhal, "Design And Characterization Of Compact Microstrip Patch Antenna Using 'Split Ring' Shaped Metamaterial Structure," *International Journal of Electrical and Computer Engineering (IJECE)*, vol. 2, no. 5, Jan. 2012.
14. JWWW.LTSpice XVII
15. B. Garg, V. Sharma, and N. Agrawal, "Size reduction of Rectangular Microstrip Patch Antenna incorporated with "INTERCONNECTED FRAMED SHAPED" Metamaterial structure for WLAN applications," 2012 IEEE Students Conference on Electrical, Electronics and Computer Science, 2012.
16. CST Microwave Studio © 2010.

AUTHORS PROFILE



Himanshi Sharma currently M.tech student from Madhav Institute of Technology & Science, Gwalior, Madhya Pradesh, India. She has obtained B.E. degree in 2016 from NRIITM, Gwalior Madhya Pradesh, India. Her current research work includes RF Energy Harvesting.



Dr. Laxmi Shrivastava currently working as an Associate Professor in MITS, Gwalior, Madhya Pradesh, India. She has received Ph.D Degree and M.tech degree from RGPV, Bhopal, India. She is graduated from G.B. Pant University of Agriculture and Technology, Udhm Singh Nagar, Pantnagar, Uttarakhand, India. She has published 56 Conference Papers and 25 Journal Papers. Her Research Interest includes Wireless and Ad-hoc Networking.