

Beamwidth Enhancement of Array Microstrip Antenna for Radio Altimeter Application

Antonius Kota Beoang, Radial Anwar, Yuyu Wahyu

Abstract—In this paper, an array microstrip antenna with 2x2 configuration has been simulated and measured for radio altimeter. The goal of this study is to achieve a proper beamwidth for this application with acceptable VSWR. Thus, the spacing between patches has been varied to obtain the beamwidth. The simulation shows the antenna has 50.2 x 60 degrees beamwidth with VSWR of 1.21, where after measurement the antenna has gained VSWR of 1.238, 250.04 MHz bandwidth and beamwidth of $\pm 48 \times \pm 65$ degrees.

Keywords: Beamwidth; Microstrip Array Antenna; Radio Altimeter; VSWR.

I. INTRODUCTION

The use of radio altimeter has been widely considered beneficial for altitude measurement. It has a substantial function for the flying vehicles to measure its height against the ground level. The distance is calculated by adjusting the time interval of the transmitted and received signal of the antenna.

Radio altimeter requires small and thin antenna which is suitable with the structure of the aircraft. The antenna also needs the beamwidth of $50^\circ \times 60^\circ$ and 10 dB gain [1]. The purpose of the beamwidth is to avoid backscattering and rain attenuation from rain.

Research on microstrip antenna for radio altimeter has been conducted using array method [2,3,4,5], I-slot [6], slotted rook shape [7], T-slot [8], pentagon method [9], E-shape [10], dipole with sierpinski carpet fractal technique [11], star chain fractal cpw method [12], rectangular patch with double l-probe fed [13], conformal patch [14] and verre de champagne fractal cpw method [15]. There are two research [2,3] where both of antennas have gain above 10 dB, but not with the beamwidth. In this paper, a 2x2 array microstrip antenna is proposed where the space between patch is coordinated so that the beamwidth of $50.2^\circ \times 60^\circ$ from simulation can be attained with the desired VSWR and bandwidth on the frequency of 4.3 GHz.

II. ANTENNA DESIGN

The proposed antenna for this paper is amicrostrip antenna with rectangular patch on full groundplane. Where copper with the thickness of 0.035 mm is chosen as the material for groundplane, patch and feed line. The substrate of the antenna is FR-4 which has a 4.3 dielectric constant

and height of 1.6 mm. Table 1 shows the variable of the initial antenna and the structure can be seen in Figure 1.

The array method is applied in order to maintain the gain value. Hence, there are 4 patches in a 2x2 planar configuration on the antenna. Each patch is linked to a 100Ω feed line and finally connected to the main 50Ω feed line.

Table 1. Variables of Antenna Structure

Variable	Parameter	Size (mm)
W_1	width of patch	19.93
L_1	length of patch	16.6
W_2	width of groundplane	31.02
L_2	length of groundplane	25.92
W_3	width of 50Ω feedline	4
W_4	width of 100Ω feedline	0.626
L_3	length of feedline	4.79
H_o	height of insetfed	4.97
Gap	gap of insetfed	2
H	thickness of FR-4	1.6
T	thickness of copper	0.035
S_1	up-down space	36.56
S_2	left-right space	29.76

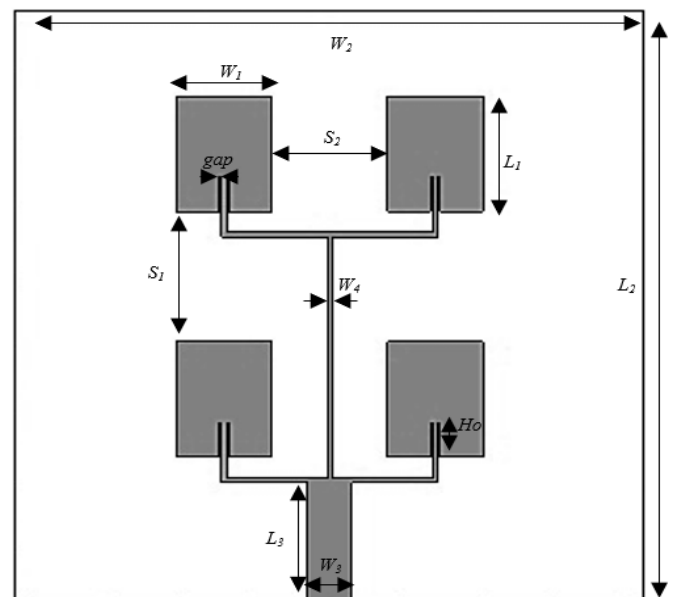


Figure 1. Front View (back view)

Revised Manuscript Received on August 05, 2019.

Antonius Kota Beoang, School of Applied Science, Telkom University, Bandung, Indonesia.

(E-mail: antoniuskotabeoang@student.telkomuniversity.ac.id)

Radial Anwar, Research Center for Electronics and Telecommunication Indonesia Institute of Sciences, Bandung, Indonesia.

Yuyu Wahyu, Research Center for Electronics and Telecommunication Indonesia Institute of Sciences, Bandung, Indonesia.

In Table 1, it is written that there are S_1 and S_2 , used as the variable for spacing between the patch. Initially, the spacing on this paper can be found by eliminating the wavelength of antenna with twice the size of the width and length of patch. These spacing, S_1 and S_2 is used to determine the beamwidth of $50^\circ \times 60^\circ$.

The variation on the spacing value of the antenna is employed first. Decreasing the spacing between patches can affect the value of the beamwidth, however we still have to adjust VSWR of the resonant frequency. Thus, all of the parameter antenna is simulated for obtaining the optimized structure.

III. RESULT AND DISCUSSION

The 2x2 array antenna has been simulated and analyzed by using CST Studio Suite 2017. In the optimization process, up-down spacing (S_1), left-right (S_2), width of feed line (W_3), and width of patch (W_1) were varied. At first, the spacing of the patch is decreased, both S_1 and S_2 . The graph in Figure 2 and Figure 3 displays respectively the study of S_1 and S_2 , where both spacing are eliminated, then the beamwidth can be maintained.

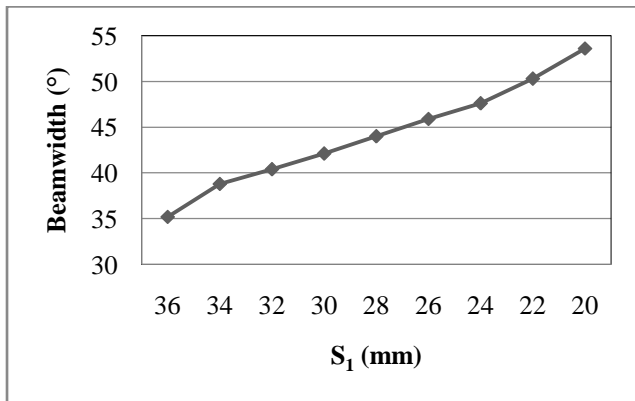


Figure 2. The effect of decreasing S_1 on azimuth

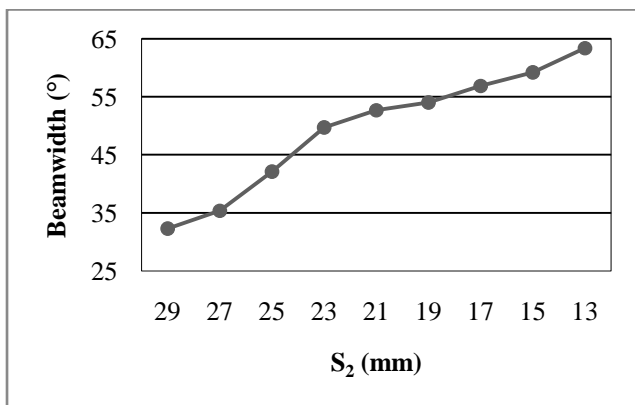


Figure 3. The effect of decreasing S_2 on elevation

When S_1 is decreased up until 22 mm (0.315367λ) and $S_2 = 15$ mm (0.215023λ), a $50.3^\circ \times 59.2^\circ$ beamwidth has been reached, which seems close to the desired beamwidth. However, other parameters should be looked into, one of them is VSWR. The affect of decreasing of the spacing on VSWR can be viewed in Figure 4.

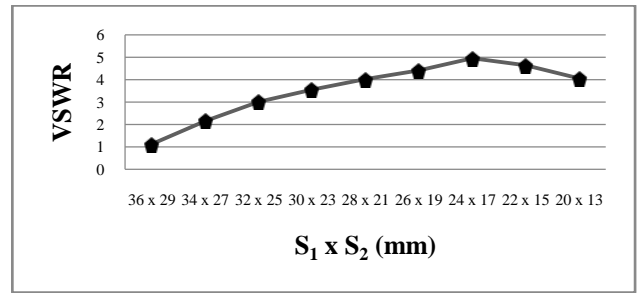


Figure 4. The effect of decreasing $S_1 \times S_2$ on VSWR

Graph in Figure 4 depicts that the value of VSWR is declining along with the decreasing of spacing between patches. Although the beamwidth is close to $50^\circ \times 60^\circ$, it can be denied that VSWR is higher than 2. So, a new optimization of another parameter is needed. In this study, the better VSWR can be accomplished by limiting the width of patch (W_1) which can be seen in Figure 5.

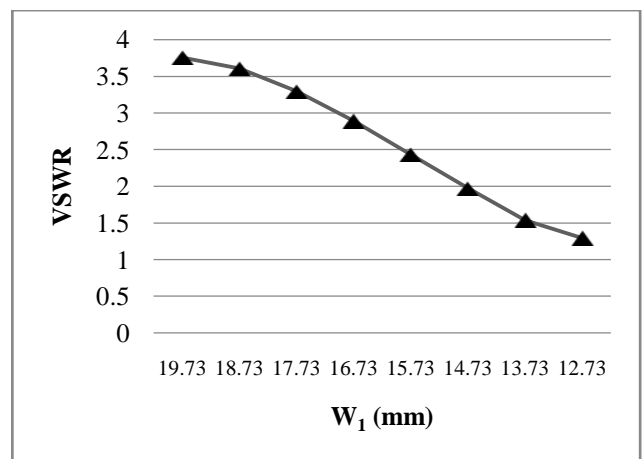


Figure 5. The effect of limiting W_1 on VSWR

As depicted in Figure 5, the value of VSWR can get lower than 2 by deducting the width of patch. Despite achieving VSWR of 1.29 when $W_1 = 12.73$ mm, another parameter should be studied as its contribution might sharpen the value of VSWR. The width of 50Ω feed line (W_3) then was chosen to be considered. Figure 6 shows the outcome of modifying W_3 on VSWR.

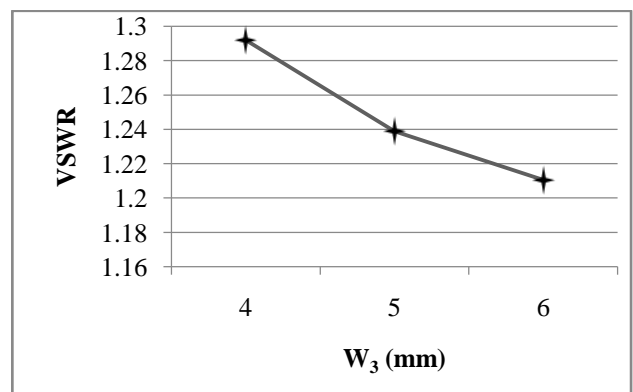


Figure 6. The effect of widening W_3 on VSWR

After widening the width of 50Ω feed line, the optimal VSWR is 1.21 where $W_3 = 6$ mm. Changing the width of patch and 50Ω feed line apparently can influence the beamwidth. The closest beamwidth, which was $50.3^\circ \times 59.2^\circ$ where $S_1 = 22$ mm (0.315367λ) and $S_2 = 15$ mm (0.215023λ), shifted into $44.2^\circ \times 58.6^\circ$. The obtained beamwidth isn't close to $50^\circ \times 60^\circ$. Supposedly, the beamwidth of the antenna is getting smaller as its aperture changes. Therefore, to make the beamwidth reach the requirement, the both of the spacing should be adjusted again. The graph in Figure 7 and Figure 8 show the beamwidth increment when the spacing of S_1 and S_2 are eliminated.

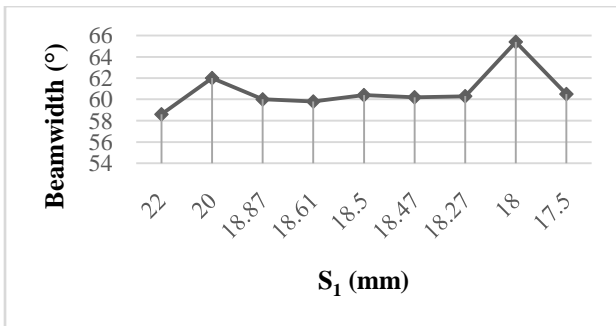


Figure 7. The effect of decreasing S_1 on azimuth

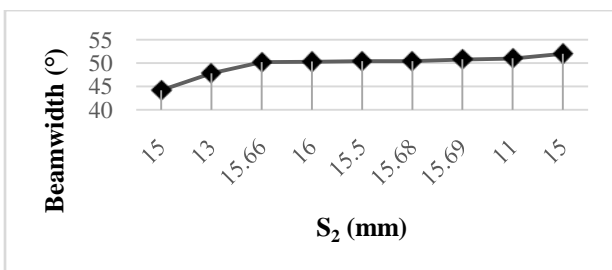


Figure 8. The effect of decreasing S_2 on elevation

When the spacing of S_1 is decreased, the beamwidth on azimuth plane of antenna is fluctuating, unlike the spacing of d_2 is steadily increased. However, the beamwidth of 50.2° on the azimuth plane and the elevation of 60° in Figure 9 can be obtained with using spacing $S_1 = 18.87$ mm (0.270498λ) and $S_2 = 15.66$ mm (0.224483λ). The antenna has VSWR of 1.21 with bandwidth of 206 MHz (return loss ≥ 10 dB) and gain of 6.717 dB which can be seen in Figure 10 until Figure 12.

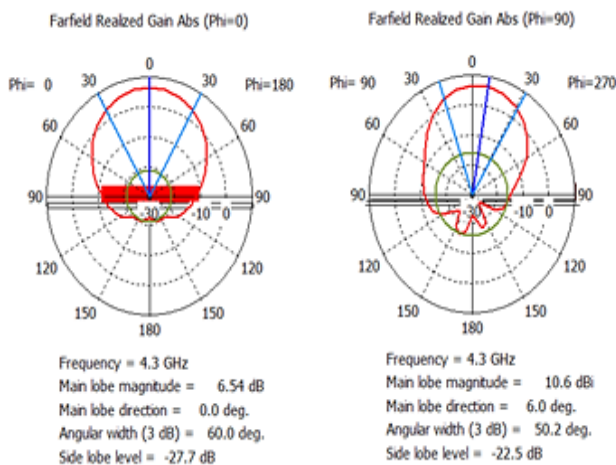


Figure 9 : The beamwidth of the proposed antenna

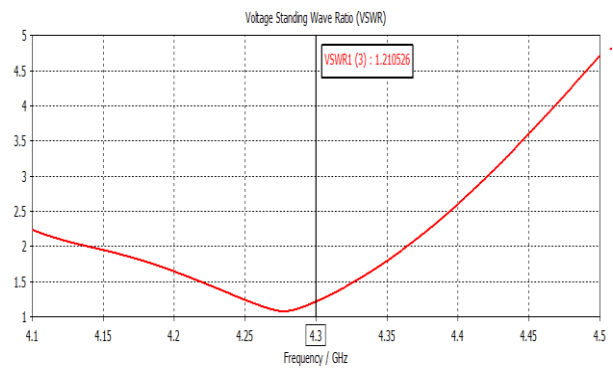


Figure 10 : VSWR of the antenna

The new structure of the proposed antenna displays in Table 2 to sum up the optimal design of the antenna. Table 3 depicts detailed information for comparing the other study about microstrip antenna for radio altimeter that has been done before to validate there is an enhancement of beamwidth in this study.

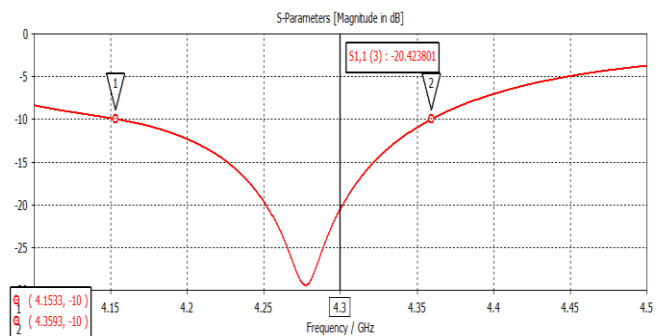


Figure 11 : Bandwidth of the antenna

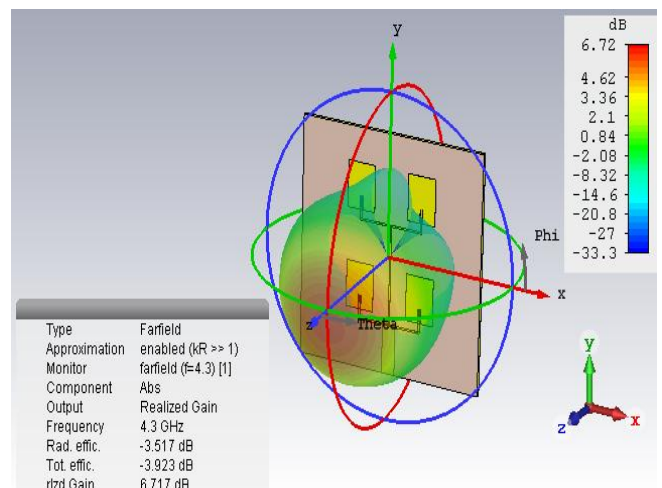


Figure 12 : Gain of the antenna

Table 2. The New Structure of Antenna

Variable	Parameter	Size (mm)
W_1	width of patch	12.73
W_3	width of 50Ω feedline	6
S_1	up-down space	18.87
S_2	left-right space	15.66

Table 3. Comparison between recent research

Description	Beamwidth
Compact antennabased on bi-layersubstratetechnology	$33^\circ \times 37^\circ$
E- shape modification with parasite element	$\pm 37.9^\circ \times \pm 58.5^\circ$
Linear array rectangular patch microstrip antenna with proximity coupled feeding	$20.9^\circ \times 66.2^\circ$
This work	$50.2^\circ \times 60^\circ$

The simulated antenna is then fabricated with FR-4 epoxy substrate. The front and back view of the antenna are respectively shown in Figure 14. The beamwidth, gain, VSWR are measured to know the performance of the antenna. The beamwidth of antenna after measurement is $\pm 65^\circ$ for elevation plane and $\pm 48^\circ$ for azimuth plane, as displayed in Figure 15 and Figure 16 where both simulated and measured beamwidth are compared. In terms of VSWR, the antenna is tested by using T5280A Vector Network Analyzer. As shown in Figure 17, the simulated and measured VSWR are compared to see the difference.

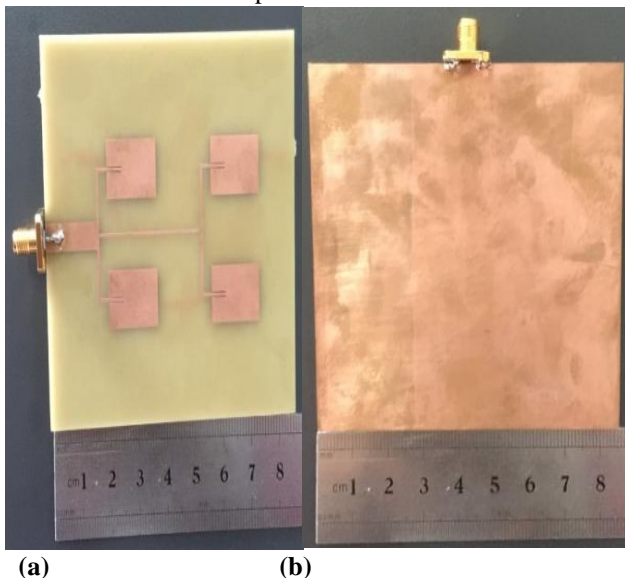


Figure 14 : The fabricated antenna with (a) the front and (b) back view

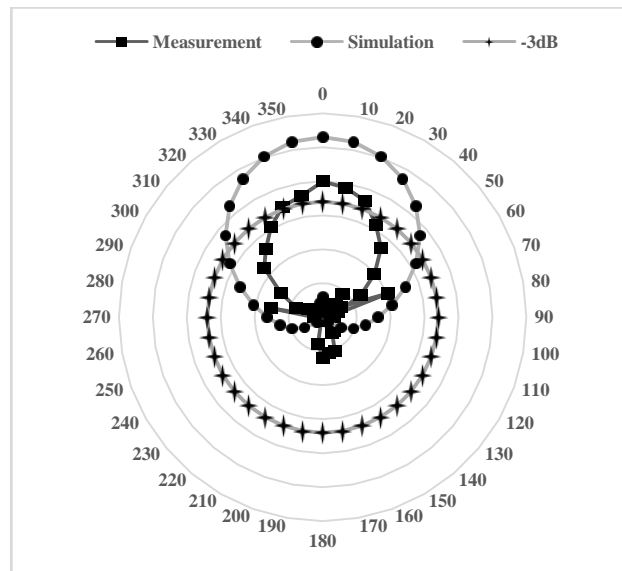


Figure 15 : The comparison of simulated and measured beamwidth of azimuth plane

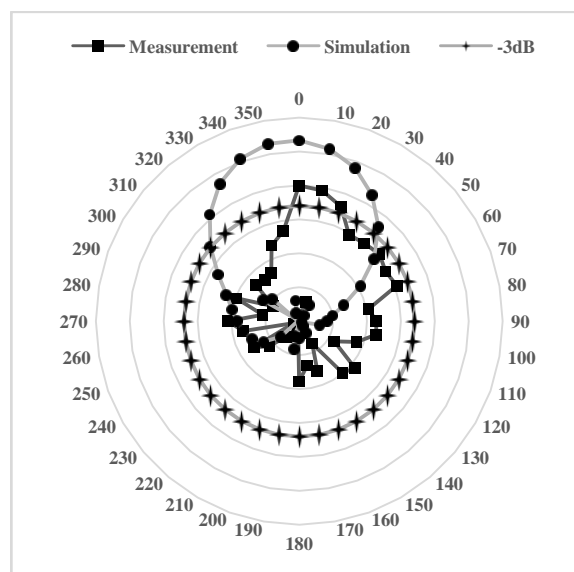


Figure 16 : The comparison of simulated and measured beamwidth of elevation plane

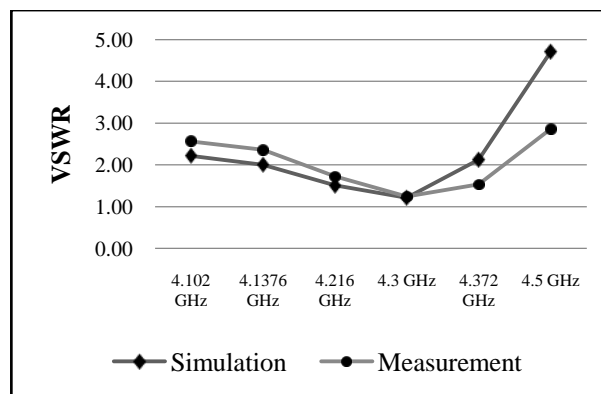


Figure 17 : The comparison of simulated and measured VSWR of the antenna

From the above graph, it shows that the measured antenna has VSWR of 1.238 on the frequency of 4.3 GHz with 250.04 MHz bandwidth. The radiation pattern in Figure 15 and Figure 16 also portrayed that the antenna has unidirectional pattern with the gain of 6.695 dB. Table 4 will be displaying the comparison between gain antenna both from simulation and measurement of this paper and recent research to recognize the effect of each shape with gain.

Table 4. The Comparison of Gain Antenna between Recent Research

Paper	Type	Sim. Gain	Meas. Gain
[2]	Array antenna based on the meta-material zeroth-order resonator	6.6 dB	N/A
[3]	Circular 1x4 array	12 dB	N/A
[4]	Compact antenna based on bi-layer substrate	8 dB	8 dB
[5]	Linear 1x4 array with proximity coupled feeding	13.17 dB	13.46 dB
[6]	I-slot	8.16 dB	N/A
[7]	Slotted rook shape	3.64 dB	N/A
[9]	Pentagon method	7.44 dB	N/A
[10]	E-shape	9.5 dB	9.276 dB
[11]	Dipole with sierpinski carpet fractal technique	11.3 dB	N/A
[13]	Rectangular patch with double L-probe fed	5.95 dB	N/A
This work	2x2 array	6.717 dB	6.695 dB

IV. CONCLUSION

The antenna with the right beamwidth and desired VSWR for radio altimeter has been achieved in this study. Such beamwidth can be obtained by analyzing the combination between the up-down and left-right spacing of the patch. The $50.2^\circ \times 60^\circ$ beamwidth is finally reached by giving space of 0.270498λ for the up-down spacing and 0.224483λ for the left-right spacing. However, other parameters like the width of patch and 50Ω feed line can also effect the performance of the antenna. The measured antenna has VSWR of 1.238 on 4.3 GHz frequency with 250.04 MHz bandwidth.

REFERENCES

1. M. Kayton, W. R. Fried, *Avionics Navigation Systems*, 2nd ed. New York: John Wiley & Sons, Inc, 1997, pp. 491–498.
2. A. A. Fashi, M. Kamyab, and M. Barati, "A microstrip small-sized array antenna based on the meta-material zeroth-order resonator," *Progress In Electromagnetics Research Letters*, vol. 14, pp. 89–101, 2010.
3. A. Keshtkar, A. Keshtkar, and A. R. Dastkhosh, "Circular microstrip patch array antenna for c-band altimeter system," *International Journal of Antennas and Propagation*, vol. 2008, article ID 389418, doi:10.1155/2008/389418, Nov. 2007.

4. A. Chen, X. Ying, and K. Ding, "A novel compact antenna of radio altimeters based on bi-layer substrate technology," *2013 5th IEEE International Symposium on Microwave, Antenna, Propagation and EMC Technologies for Wireless Communications*, pp. 402–405, Oct. 2013.
5. Y. S. Amrullah, A. B. Santiko, B. H. Prabowo, and Y. Wahyu, "Design and realization linear array rectangular patch microstrip antenna with proximity coupled feeding for airplane radio altimeter at frequency of 4.3 ghz," *Jurnal Elektronika dan Telekomunikasi*, vol. 16, pp. 33–39, Dec. 2016.
6. H. M. Elkamchouchi, R. A. Salem, "Triple band microstrip patch antenna with i slot for radar altimeter applications," *IOSR Journal of Electronics and Communication Engineering (IOSR-JECE)*, vol. 11, pp. 53–57, May-Jun. 2016.
7. V. Singh, H. Bhatia, P. Kuchroo, and E. Sidhu, "Slotted rook shaped novel wide-band microstrip patch antenna for radar altimeter, imt, wimax and c-band satellite downlink applications," *2016 International Conference on Global Trends in Signal Processing, Information Computing and Communication*, pp. 334–337, Dec. 2016.
8. B. Singh, N. Singh, "Design of a corner cut rectangular microstrip antenna having t-slot for wi-fi, radar and satellite applications," *International Journal of Advanced Research in Computer Science and Software Engineering*, vol. 3, Nov. 2013.
9. K. R. Devi, A. M. Prasad, and A. J. Rani, "Design of a pentagon microstrip antenna for radar altimeter application," *International Journal of Web & Semantic Technology (IJWesT)*, vol. 3, Oct. 2012.
10. S. G. E. Lestari, H. Wijanto, and Y. Wahyu, "Design and realization of modified e-shape microstrip antenna with parasitic elements for radio altimeter at 4.2 – 4.4 ghz," *e-Proceeding of Engineering*, vol. 2, Aug. 2015.
11. J. Thongbai, A. Namsang, and P. Chomthong, "A dipole antenna using sierpinski carpet fractal technique for rf altimeter system," *2016 International Symposium on Antennas and Propagation (ISAP)*, pp. 968–969, Oct. 2016.
12. R. Somvadee, A. Namsang, R. Lerdwanittip, and P. Chomthong, "A dual-band star chain fractal cpw antenna for lte and rf altimeter systems," *2016 International Symposium on Antennas and Propagation (ISAP)*, pp. 1072–1073, Oct. 2016.
13. M. Saravanan, M. J. S. Rangachar, "A novel rectangular patch antenna with double l-probe fed for radar altimeter application," *2016 International Conference on Wireless Communications, Signal Processing and Networking (WiSPNET)*, pp. 1777–1780, Mar. 2016.
14. J. Porrazzo, C. White, "Conformal patch antenna for radar altimeter applications" *Journal of Modeling and Simulation of Antennas and Propagation*, vo.1, Jan. 2015.
15. T. Phasithjirakul, T. Wannasirimongkol, A. Namsang, R. Lerdwanittip and P. Chomthong, "Design of a dual-band verre de champagne fractal cpw antenna for lte and aircraft altimeter application," *2016 International Symposium on Antennas and Propagation (ISAP)*, pp. 1052–1053, Oct. 2016.