

Automotive Lighting System Simulator

Arnelo D. Naelga, Lad H. Labrada

Abstract: *This study aims to determined automotive lighting system simulator and its effect in improving students performance. The study looked into the following questions: What is the respondents input variable in terms of; gender, year level, scholarship status, family income, purpose of taking the course, number of units, attendance and participation. What is the pre-test written and practical score in terms of; park/tail, head, turn signal, brake, reverse, horn, hazard, dome light, door light. Is there any significant difference in respondents pre-test and post-test written and practical scores and To what extent does the input and process variable explains output variable This study made use of the descriptive research design. Descriptive statistics; means, percentages and standard deviations and inferential statistics one tailed t-test and multiple linear regression analysis were used.*

The study was conducted to 44 students taking AET 161 (Advanced Undercarriage Services) at Mindanao State University – Iligan Institute of Technology.

*The result showed all the respondents are third year students. The majority are males with no scholarship status. Majority of the respondents' fathers' and mother's monthly income is from none to 5,000 and below. The data further showed that majority of the respondents' current number of units is 21-24 and that through substantial number of student took the course because of No available slots, but majority took the course because of job demand, work abroad, and to sustain and provide for family. Majority attendance is from 7 to 8 and their participation during the study in from 19-30, classified as good to very good. Majority of respondents' pre-test written score is fair and pre-test practical score is poor. Majority of respondents' post-test written score is very good post-test practical score is very good, as evaluated by 3 experts. The result indicates that the post-test written is significant higher than the pre-test written ($T=20.00^{**}$) and post-test practical is significant higher than the pre-test practical ($T=20.73^{**}$). Respondent written post-test is not influenced or affected by the respondents gender, father's income, mother's income, current number of units, purpose of taking course, total attendance, pre-test written and pre-test practical. However, individually participation have a significant effect in respondents' post-test written. There is significant and highly significant effect in individual variables to the respondents' post-test practical exam. Specifically, on current number of units, purpose of taking course and attendance to practical post-test of students and participation in written post-test.*

Thus, it is therefore recommended that; the administration may strengthen research innovation that enhances students' performance. Teachers requested to innovate or use the automotive lighting system to address competency gap of the automotive student in automotive lighting system and providing relevant laboratory tools that replicate the ideal set up of automotive lighting system troubles, operations and circuits. The students are highly encouraged to maximize and appreciate actual visualization of the electrical lighting system set up and actual wire troubles, in order to familiarize the operation and behavior of its components.

Keywords: *Research Instructional trainer, automotive lighting simulator*

I. INTRODUCTION

Electricity is one of the most complex matters the automotive students must deal with. New vehicles increase its electrical and electronic components and also equipped with more complex electrical and electronic equipment. It is essential for the students to understand electricity and to be able to understand how the electrical systems operate, how it is tested and how it should be serviced properly. Knowing the electrical components and circuits does not mean knowing at all. Interpreting the problems and diagnosing the troubles is the main key in solving the complex behavior of electrical system of a vehicle (Ellinger, 1976; Mirzamasoumzadeh, & Mollasadeghi, 2013).

Basically, automotive designs may vary in size, color, operations, locations, depends upon the brand, manufacturer, year model and purpose likewise in automotive electrical system. Automotive electrical system have the same operations, principles and components so the focus of the teacher is to deliver a lesson that makes the student understand the basic and general principles and operation of automotive electrical system. Despite of teachers teaching experience, competitiveness and wide range in technical experience, sometimes lectures and series of theoretical explanation is not enough for the student to understand and to be competent on automotive electrical system. With this challenges encountered every day, the teacher will innovate and sometimes fabricate a model or prototype that makes lectures and practical activity will be easier with less hustle and effort (Gutiérrez-Artacho & Olvera-Lobo, 2017; Mukanbetkaliyev et al, 2018).

One of the educational materials used by the teacher in enhancing the basic automotive electrical skills and knowledge of a student is to make a trainer. An automotive electrical trainer is a prototype material that replicates the original form or structure of an auto electrical system or components. The trainer is produced for the purpose of exposing the student to the direct parts, functions and components of the system and occupies less space and materials compared to a whole vehicle as laboratory equipment. Unlike other trainer, automotive electrical trainer cannot replicate the actual electrical troubles of vehicle so student will never experience the actual troubles and problems that may occur to the system.

In order to address the existing problem of an auto lighting system trainer, this study proposed to innovate the conventional automotive electrical lighting system trainer into automotive electrical lighting system simulator. The purpose of simulator is to simulate or replicate the troubles and problems that may occur in actual operation of automotive lighting system of a vehicle. Since

Revised Manuscript Received on April 12, 2019.

Arnelo D. Naelga, University of Science and Technology of Southern Philippines (Email: arnelonaelga12@gmail.com)

Lad H. Labrada, University of Science and Technology of Southern Philippines (Email: lad.labrada@g.msuiit.edu.ph)



the automotive lighting system simulator creates wiring troubles, the student can now experience hands on electrical troubleshooting and diagnosing with the use necessary testing materials and tools such as test bulb and volt-ohm-milliammeter or (VOM) as relevant tools in troubleshooting.

Conceptual framework of the Study

Input-Process-Output (IPO) framework is a model that consists of concepts that are broadly defined and systematically, organize to provide a focus of the study. This framework emphasis flow of the study and specifies the relationship between Input, Process and output variables by using flow charts and process diagram. IPO framework is an outline of possible course of action or to present a preferred approach to an idea or thoughts (Eusibio, 2014). Input-Process-Output (IPO) and Outcome framework is utilized by the researcher as general guidelines and main structure in the development of this study.

The Input variables are the list of raw data or pre-existing data which has been provided by the external system or any relevant information. The input data of this study was the gender, year level, scholarship status, monthly family income, number of units, purpose of taking the course, attendance and participation.

The Process variables are the data that mediates the relationship between the input and the output. The process data of this study was the result of the respondents individual written and practical score of the park/tail light, headlight, turn signal light, brake light, reverse light, hazard light, horn circuit, dome light and door light.

The output variable was the data collected after the intervention process thru classroom instructions, activity and quizzes as well as actual participation and practical quizzes. This includes the result from the individual written and practical score of the park/tail light, headlight, turn signal light, brake light, reverse light, hazard light, horn circuit, dome light and door light.

II. MATERIALS & METHODS

2.1. Research Design

This research study utilized a descriptive research method (Creswell 2003) maintained that descriptive research is an approach which the inquirer often makes knowledge claims based primarily on constructivist perspectives (i.e., the multiple meanings of individual experiences, meanings socially and historically constructed. with an intent of developing a theory or pattern) or advocacy/participatory perspectives (i.e., political, issue-oriented, collaborative. or change oriented) or both. It also uses strategies of inquiry such as narratives, phenomenologies, ethnographies, grounded theory studies, or case studies. The researcher collects open-ended emerging data with the primary intent of developing themes from the data.

In addition, descriptive research is used when the objective is to provide a systematic description that is as factual and accurate as possible. It provides the number of times something occurs, or frequency, lends itself to statistical calculations such as determining the average number of occurrences or central tendencies.

2.2. Research Setting

This study was conducted in Mindanao State University – Iligan Institute of Technology, Tibanga, Iligan City. The MSU-IIT visions is to become a world-class institution of higher learning renowned for its excellence in science and technology and for its commitment to the holistic development of the individual and society anchored by its mission that is to provide a quality education for the industrial and socio-economic development in Mindanao with its diverse cultures through relevant programs in instruction, research, extension and community involvement.

2.3. Respondents of the Study

This study evaluates the learning outcomes of automotive electrical lighting system knowledge and skills of all forty four (44) students taking AET 161 (Advanced Undercarriage System) in Mindanao State University – Iligan Institute of Technology.

2.4. Research Instrument

A test questionnaire is made to gather respondent's information such as gender, year level, scholarship status, family income, purpose of taking the course and number of units. Test questionnaire is made in written examination about automotive Lighting system. Activities like participation and simulation Assessments was also be made by the researcher as well as practical examination in check list and rubric format on test and repair automotive lighting system was made by the researcher. These written and practical exams served as pre-test and post-test instruments which are used by the researcher during the pre-test and post-test by external evaluators.

2.5. Sampling Procedure

The study use of purposive sampling procedure since all the students taking the subject AET 161 (Advanced Undercarriage Services) was the respondents of the study. The number of the students taking this subject is forty four (44) and this is the total respondents of this research. This subject has two (2) sections, each section consist of twenty one (21) and twenty three (23) students with common lecture schedule and split schedule in laboratory hours.

2.6. Data Gathering Procedure

The data was collected in the following phases; phase one is to send a letter of the automotive department chairman in requesting the students to participate in the research and a written letter of consent to all students that informs them of the task, scope and importance of the study and requesting the student to fully participate in the research. Phase two is to conduct a pretest to determine the knowledge and skill on Testing and Repair automotive lighting system. Classroom instruction integrated with the innovation was conducted for a total of four (4) weeks with two (2) hours merging the lectures and three (3) split laboratory hours a total of forty-eight (48) hours. A post-test was conducted to evaluate effectiveness of the innovation by three (3) external

evaluators, one (1) is from academe, one (1) is from industry and one (1) is a TESDA assessor.

Scoring Guidelines

Written Examination	Practical Written Examination	Practical Examination
Very Good	17-20	25-30
Good	15-16	19-24
Fair	9-12	13-18
Poor	5-8	7-12
Very Poor	0-4	0-6

2.7. Statistical Treatment

Descriptive statistics such as percentage, frequency count, and weighted mean were used to describe the respondents' scores and responses in written and practical examination. Inferential statistics, (*t*-Test) to test difference between pretest and posttest, and regression analysis to test the effects of input and process variable to output variable.

2.8. Project Development of Automotive Lighting System Simulator

A. Designing, Restoration and Installation

The designing, restoration and installation is composed of three stages,

1. Designing of simulator with arduino mega 2560, 8 channel relay, 8 manual switches and automotive 5 pins/12volts relay.
2. Restoring of old automotive, non-usable or obsolete lighting system trainer and reconditioning the frame, wiring and accessories.
3. Installing the simulator to the automotive lighting system wires

Stage 1

The simulator used in this study is composed of Arduino mega 2560 as processor or computer of the project which use 12volts DC electrical supply, 8 channel module that acts as an output device to operate the automotive relay which use a 5volts DC electrical supply, manual switch serves as an input device of the simulator and a 5 pins automotive relay that composed of two circuits, one for trigger circuit and the other one is the supply circuit. In this stage, the researcher asking for assistance of the computer programmer expert in programming and connecting the manual switch, arduino mega 2560 and the 8 channel relay module as one device. After connecting the major parts of the simulator, the researcher organized the wires and mounted them into one transparent box and then connected the relay module accordingly to the 5 pins automotive relay. The simulator consist of ten (10) manual switches, eight (8) push button switch that activates the eight (8) 5volts DC relay module individually, one (1) push button for pause functions of the simulator timer and one (1) push button for reset functions of the simulator device. The command of the simulator has eight different command depends on what push button will be press. One the first command, it consist of one cycle it started when the push button number one (1) were press, the Arduino mega 2560 will energized the relay number one (1) in the 8 channel relay within two (2) minutes, after two minutes arduino mega will de energize the relay number one and energizing the relay number two

(2) within two minutes. This command will repeat from relay number one, relay number two continuously until relay number eight (8) and the command will stop after relay number eight will energize. Second command is that you will press the push button number two (2) and the cycle will be the same but it will start in energizing the relay number two (2) and ends in relay number one (1). The reset button is used when the researcher decide to refresh or to start another command depends on the situation and the pause button is also used to pause the timer and command so that it allows the teacher and the student on its flexibility of the program. The researcher used transparent ready-made plastic enclosed box so that it can easily double check the function and operation of the simulator and make sure that the command will properly executed depends upon the input feed. Plastic box is highly recommended by the computer and programmer expert since it has good insulator and good materials in protecting the electronic parts inside.



Figure 2. Simulation Device

Mounting of arduino mega 2560, manual switch and 8 channel relay in one box

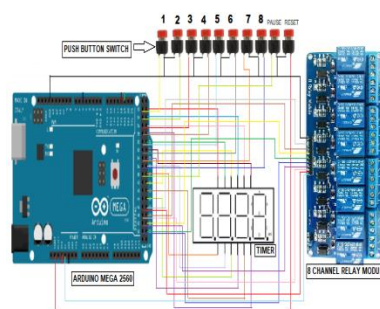


Figure 3. Simulator Circuit

Actual electrical circuit of the automotive lighting system simulator

Stage 2



In this stage, since the automotive department has a lot of non-working, defective and obsolete automotive lighting system trainer. The researcher decided to select the non-usable existing automotive lighting system trainer with the following lighting system mountings like park and tail lamp, headlight bulb, turn signal light, brake light, reverse light, horn, and other accessory mountings like combination switch, manual and individual switches, flasher relays and relays, fuse box and battery that will fit to the current project and convert it as functional. Figure 4. Shows the repainting job of the old automotive lighting system trainer so that the new project will be safe for troubleshooting experience of the student. After repainting session, the researcher installed back the functional parts such as headlight assembly, park and tail light assembly, turn signal light assembly, brake and reverse light assembly. New automotive lighting assembly is installed such as dome light assembly, dashboard, combination switch, hazard switch, reverse switch, brake light switch assembly, relays, flasher relay, Horn, fuse and fuse box, improvised door and door switch and electrical wirings as well as junctions.



Figure 4. Repainting of frame

Stage 3

stage involves connecting the 8 channel relay module and the automotive relay to the electrical wire of the automotive lighting system circuit. This project development used eighteen (18) special automotive relay that has 5 pins with normally closed contact. The purpose of relay that has 5 pins with normally closed contact is the responsible in cutting the circuit of the automotive lighting wire. In this project development each relay in 8 channel relay module can operate two 5 pins relay except on the relay number seven (7) and eight (8) that can operate three 5 pins relay. In this stage, careful planning, designing and wiring are needed since this is the critical path in obtaining the desired functions and operations of the simulator device and the automotive lighting system. Physical factors like mounting the simulator device, location of the automotive relay which part of the simulator, wire connections from simulator relay and designated automotive lighting system circuit wiring was considered. After considering the physical factors, connecting the wires between the simulator and the automotive lighting system circuit was followed. In this portion, to ensure proper connection and good conductivity in every connection the researcher always soldered the wires with the used of soldering iron and lead so that it will not cause problem during normal operation and during troubleshooting.

B. Mechanical Design

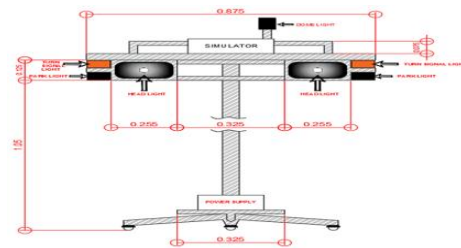


Figure 5. Front view and measurement of the frame

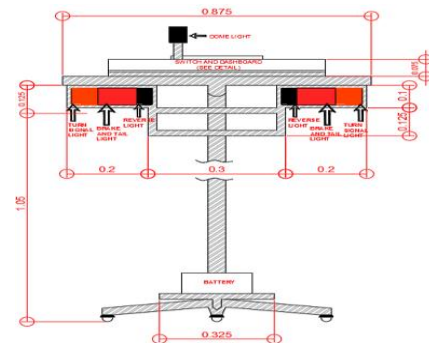


Figure 6. Rear view and measurement of the frame

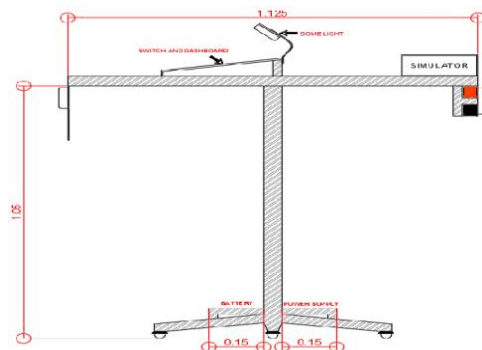


Figure 7. Right side view of the frame

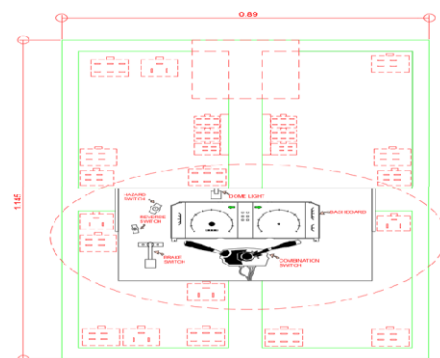


Figure 8. Top view and dashboard details

C. Design of the automotive lighting system with indicated trouble

This portion emphasis the exact connection of the automotive lighting system and its corresponding troubles in every lighting system circuit such as, park/tail light, headlight, turn signal light, brake light, reverse light, hazard light, horn, dome light and door light. The program has two different set of troubles with unique troubles in every circuit.

Park/tail light

1. Park/tail light circuit: Normally when park/tail light switch is turn on, front, rear and plate light will illuminate if the circuit is complete from the battery, switch, load and ground. In Figure 9. when arduino mega 2560 command the channel relay number one (1), the coil of the relay on the simulator will energize and the contact will shift its connection from 87a to 87 and that makes the wire from the switch junction to main load junctions cut. In this manner when the student will turn on the park/tail switch, all of the bulb will not illuminate causes and that's the time they will diagnose, identify and repair the wire. In Figure 10. when the 8 channel relay number eight (8) will energize the relay coil that causes open circuit of the wire from front-left bulb junction to the front-right bulb junction and the front-right bulb will not illuminate. The red line on the park/tail light circuit is the wire that will open circuit when simulator executes trouble on the automotive lighting system. The blue line is a wire that connects the simulator to the automotive lighting system circuit.

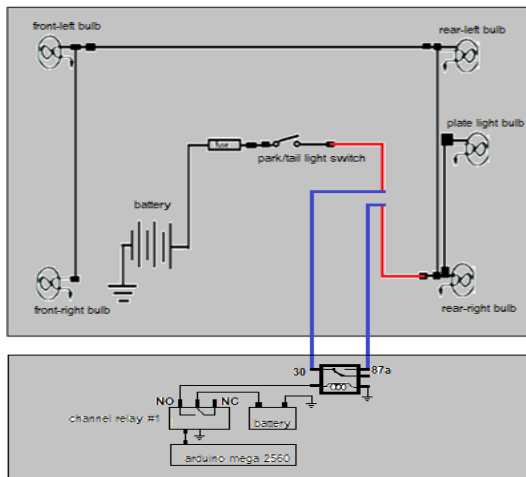


Figure 9. Park/tail light and simulator circuit (SET 1)

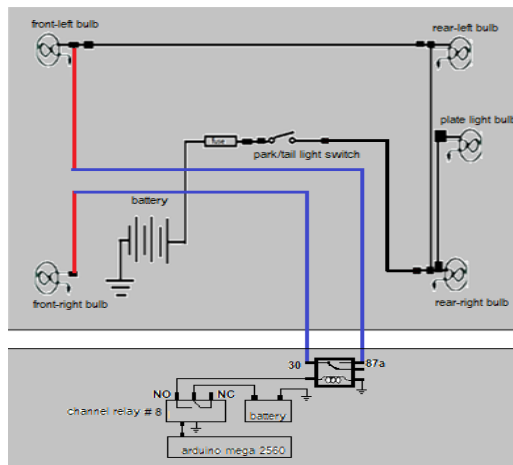


Figure 10. Park/tail light and simulator circuit (SET 2)

Head light

3. Head light: Headlight circuit is divided into two different circuit namely low beam circuit and the high beam circuit. Low beam bulb will illuminate when there is a complete circuit from the battery, headlight switch, low beam switch, low beam relay, low beam bulb and ground. Also, high beam bulb will illuminate when there is a

complete circuit from the battery, head light switch, high beam switch, high beam relay, high beam bulb and ground. In Figure 11. when the channel relay number two (2) is activated by arduino mega 2560, the relay of the simulator will cut the connection from the high beam relay junction to the high beam bulb junction causing troubles on the circuit and in effect the entire high beam bulb will not illuminate. In set two (2) figure 12., when channel relay number one (1) will activate the relay of the simulator energized to cut the connection of the wire from the front-left side junction to the front-right low beam bulb junction that causes no illumination of the front-right low beam bulb.

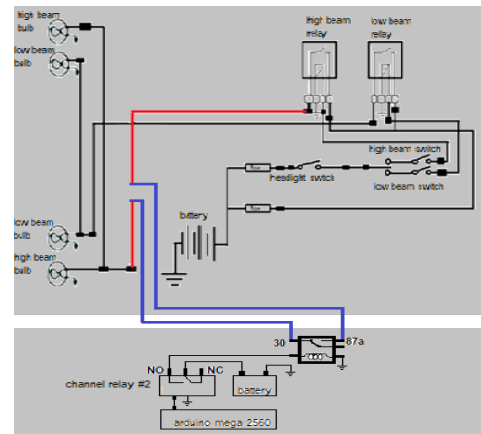


Figure 11. Headlight and simulator circuit (SET1)

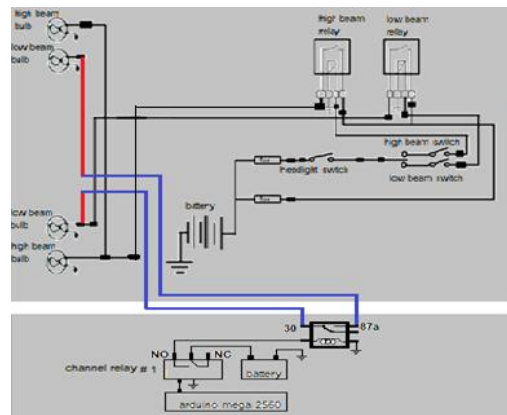


Figure 12. Headlight and simulator circuit (SET2)

Turn signal

4. Turn signal light: The turn signal electrical circuit consist of battery, flasher relay, turn signal switch with single pull double type switch, turn signal right bulb and turn signal left bulb and ground. Figure 13. shows the defective wire that causes incomplete circuit from the right side junction to the rear-right bulb junction. This bulb will not illuminate when the channel relay number three (3) activates and energizes the relay of the simulator then cuts the electrical connection of the red wire. In Figure 14. the channel relay number two (2) is responsible in cutting the wire from the left side junction to the rear-left bulb causing the rear-left bulb not to illuminate even if the student will turn on the turn signal left circuit.

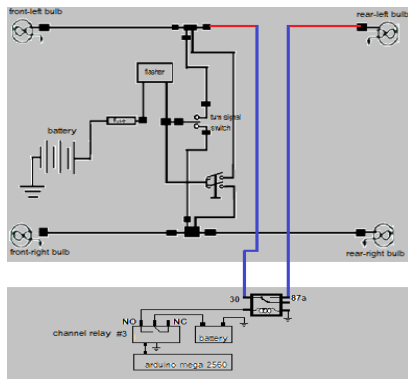


Figure 13. Turn signal light and simulator circuit (SET 1)

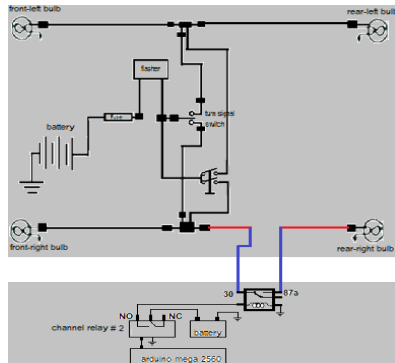


Figure 14. Turn signal light and simulator circuit (SET 2)

Brake light

5. Brake light: The brake light bulb will illuminate when the electrical connection is complete from the battery, brake light switch, brake light bulb and ground. this will happen in regular design when the driver depressed the brake pedal, in this design researcher made an innovation so that the student will operate it easily through hand operation. Figure 15. shows the actual circuit in brake light with the simulator, in this circuit the channel relay number four (4) will activate then causing the relay of the simulator to energize and cuts the wire from the rear-right junction to the rear-left junction and in effect the rear-left bulb will not illuminate when brake switch is turn on. In Figure 16., channel relay number three (3) energized to operate the relay of the simulator then cuts the connection of the wire from the fuse junction to brake light switch junction causing the entire brake light bulb not to illuminate.

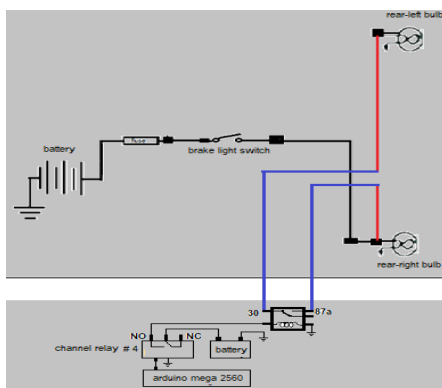


Figure 15. Brake light and simulator circuit (SET 1)

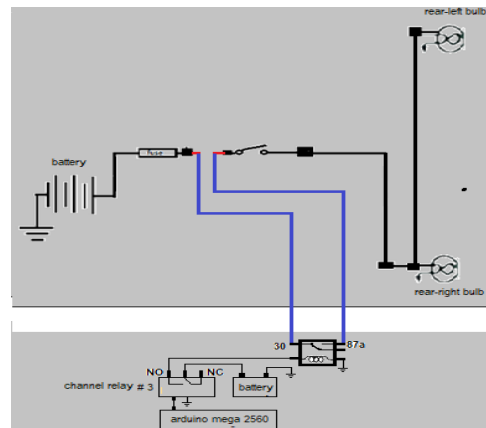


Figure 16. Brake light and simulator circuit (SET 2)

Reverse light

7. Reverse light: reverse light bulb illuminates when the driver shift the transmission lever from forward selection to the reverse selection, this inform the other road user that the vehicle will move backward. In this study, researcher used toggle switch to turn the reverse light bulb to ON. Figure 17, shows the actual circuit on how the simulator creates the trouble by cutting the electrical connection from the fuse junction to the reverse switch junction this happens when channel relay number five (5) activates. Also in Figure 18., wire from reverse switch junction to the main load junction is cut through relay of the simulator. The relay of the simulator operate when channel relay number four (4) will activate.

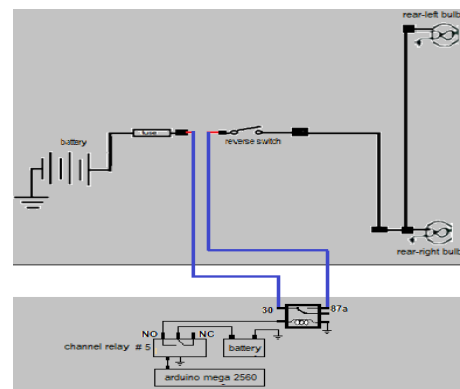


Figure 17. Reverse light and simulator circuit (SET 1)

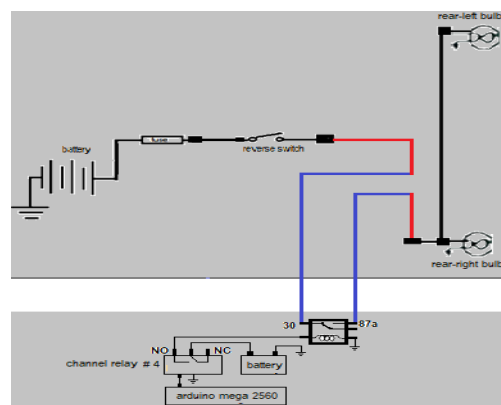


Figure 18. Reverse light and simulator circuit (SET 2)

Hazard light

8. Hazard light: Hazard light circuit is incorporated circuit in the turn signal light since the components and electrical circuit are the same. Additional components is the hazard switch thus when it turn ON the entire turn signal bulb will illuminate. The circuit compost of battery, flasher relay, hazard switch, turn signal light bulb and ground. Figure 19, shows the exact wire location when the hazard has a fault during the simulator activates. This happen when channel relay number six (6) activates causing the relay of the simulator will energize and cuts the wire from fuse junction to the flasher junction and in effect the entire turn signal light bulb will not illuminate. Also in Figure 20., the wire in the right side junction to the front-left bulb junction is cut when channel relay number five (5) activates causing the front-left bulb will not illuminate during hazard switch is turn ON.

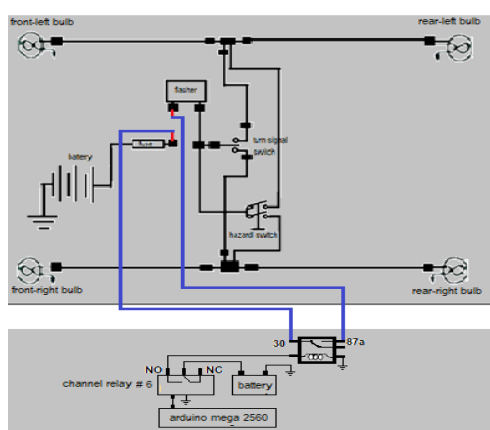


Figure 19. Hazard light and simulator circuit (SET 1)

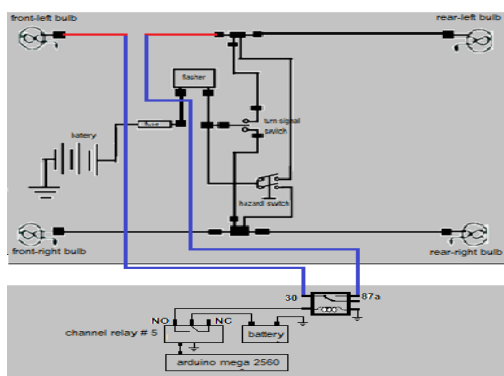


Figure 20. Hazard light and simulator circuit (SET 2)

Horn circuit

9. Horn circuit : Horn circuit consist of battery, horn switch, horn evice and ground. The horn will generate sounds when electrical circuit is completed through horn switch. In figure 21., shows the complete circuit of horn with the circuit of the simulator. The trouble starts when the channel relay number seven (7) is activated by the arduino mega 2560 causing the relay of the simulator energize and cuts the wire from the horn switch to the horn relay. Also in Figure 22., it shows the complete circuit of the horn circuit with the simulator connection. In this portion when the channel relay number number six (6) activates then operates the relay of the simulator to cut the wire from the fuse junction to the relay junction and in effect the horn will not

work even if it turn On the horn switch unless it will replace and connect another wire.

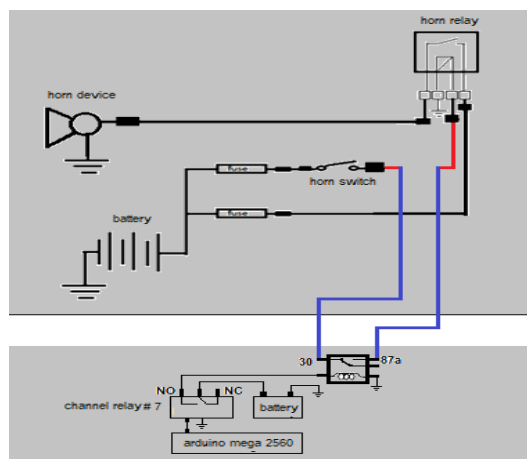


Figure 21. Horn and simulator circuit (SET 1)

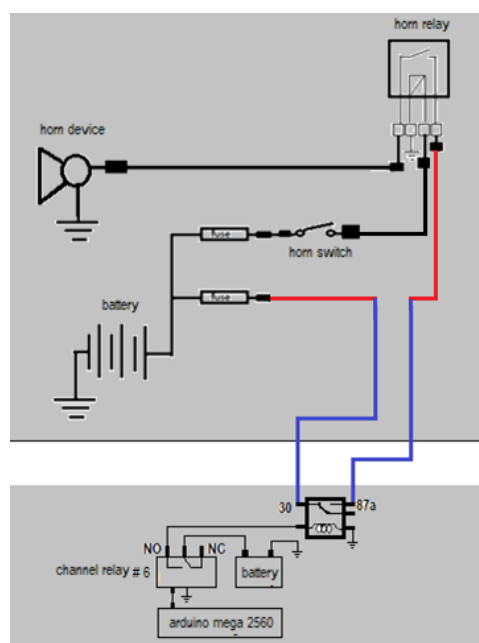


Figure 22. Horn and simulator circuit (SET 2)

Dome light

10. Dome light: The dome light is part of an interior light intended to illuminate the passenger seats of the vehicle. The circuit is compost of battery, dome light switch, dome ligh bulb and ground. Figure 23. and Figure 24., shows the electrical connection of the relay simulator wire and the actual dome light circuit thus, the only different was in Figure 23.,channel relay number eight (8) will activate whereas in Figure 24 the channel relay number seven (7) will activate causing th same trouble by cutting the wire from the fuse junction to the switch junction and in effect the dome light will not illuminate even if the switch is turn ON.

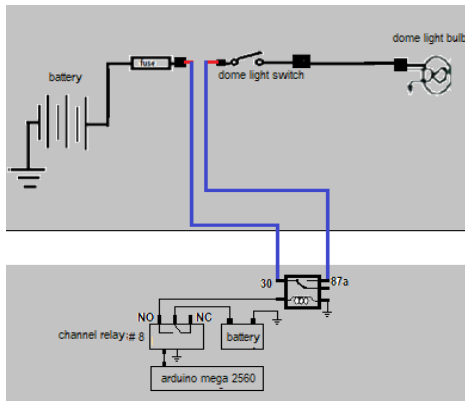


Figure 23. Dome light and simulator circuit (SET 1)

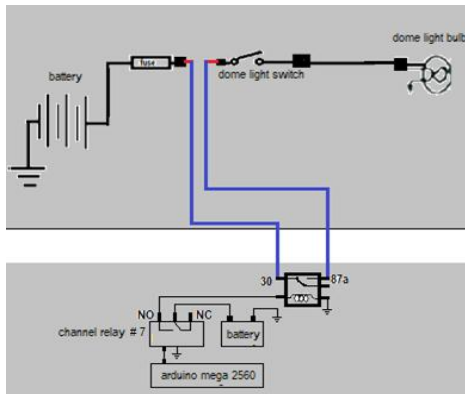


Figure 24. Dome light and simulator circuit (SET 2)

Door light

11. Door light: The door light use to inform the driver and passenger about the status of the vehicle door position. Door lamp will illuminate in the dashboard panel in front of the driver. Figure 25. And 26., shows the electrical connection of the relay simulator and the door light. InFigure 25., channel relay number eight (8) will activate and in Figure 26., the channel relay that will activate is the relay number seven (7) causes the same trouble by cutting the wire from the fuse junction to the door light switch and in effect the door lamp will not illuminate even if the door is open.

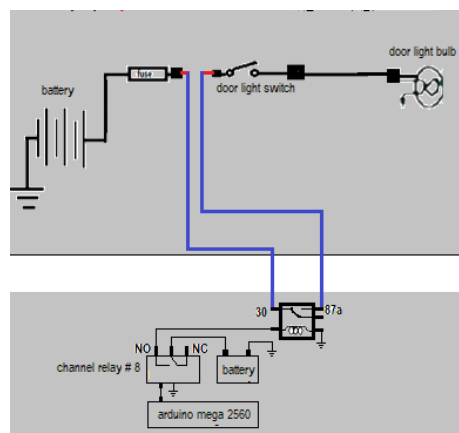


Figure 25. Door light and simulator circuit (SET 1)

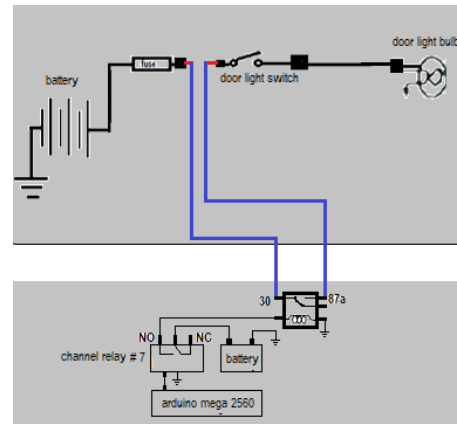


Figure 26. Door light and simulator circuit (SET 2)

III. RESULTS & DISCUSSION

Problem 1. What is the respondents' characteristics in terms of;

- 1.1. Gender
- 1.2 Year level
- 1.3 Scholarship status
- 1.4 Monthly Family income
- 1.5 Number of units
- 1.6 Purpose of taking course
- 1.7 Attendance
- 1.8 Participation

Table 1 Distribution of statistics frequency and percentage distribution on

Respondents Characteristics in terms of Gender, Year Level and Scholarship Status

Specification	Specifications	Frequency	Percentage
Gender	Male	25	56.82%
	Female	19	43.18%
	Total	44	100.00%
Year level	1 st year	0	0.00%
	2 nd year	0	0.00%
	3 rd year	44	100.00%
	4 th year	0	0.00%
	Total	44	100.00%
Scholarship Status	None	42	95.45%
	Dean's List	0	0.00%
	Chancellor's List	2	4.55%
	Rizal's List	0	0.00%
	Total	44	100.00%

The data shows that all the respondents are third year student, majority fifty-seven percent (57%) of the respondents are male. And ninety-five percent have no scholarship status.

Table 2 Distribution of statistics frequency and percentage distribution on

Respondents Characteristics in terms of father's Monthly Family Income, mother's monthly income, current number of units and purpose of taking course

Specification	Specifications	Frequency	Percentage
Father's Monthly income	None	5	11.36%
	5000 and below	18	40.91%
	5,001-10,000	13	29.55%
	10,001-15,000	6	13.64%
	15,001-20,000	2	4.55%
	20,001-25,000	0	0.00%
	25,001 and above	0	0.00%
	Total	44	100.00%
Mother's Monthly income	None	15	34.09%
	5000 and below	20	45.45%
	5,001-10,000	7	15.91%
	10,001-15,000	0	0.00%
	15,001-20,000	1	2.27%
	20,001-25,000	1	2.27%
	25,001 and above	0	0.00%
	Total	44	100.00%
Current number of Units	14 and below	7	15.91%
	15-17	8	18.18%
	18-20	4	9.09%
	21-24	23	52.27%
	25 and above	2	4.55%
	Total	44	100.00%
Purpose of taking the course	No slots available	21	47.73%
	Most of friends are taking the course	0	0.00%
	Job demand	10	22.73%
	Work abroad	8	18.18%
	Sustain/provide the needs of family	5	11.36%
	Total	44	100.00%

The data shows that majority fifty-two percent (52%) of the respondents' fathers monthly income is from none to 5,000 and below. Majority seventy-nine percent (79%) of the mother's monthly income is also from none to 5,000 and below. The data further shows that majority fifty-two percent (52%) of the respondents' current number of units is 21-24. The data also shows that though a substantial number of student took the course because of No available slots, but majority fifty-two percent (52%) took the course because of job demand, work abroad, and to sustain and provide for family.

Table 3 Distribution of statistics frequency and percentage distribution on

Respondents Characteristics in terms of attendance and participation

Specification	Specifications	Frequency	Percentage
Attendance	2	0	0.00%
	3	0	0.00%
	4	0	0.00%
	5	2	4.55%
	6	6	13.64%
	7	20	45.45%
	8	16	36.36%

Participation	25-30 Very good	16	36.36%
	19-24 Good	19	43.18%
	13-18 Fair	8	18.18%
	7-12 Poor	1	2.27%
	0-6 Very Poor	0	0.00%
		44	100.00%

The data shows that majority eighty-two percent of the respondents' attendance is from 7 to 8. And the data also shows that majority eighty percent (80%) of the respondents score in participation during the study in from 19-30, classified as good to very good.

Problem 2 what is the respondents Pretest written and practical score in terms of

- 2.1 Park/tail
- 2.2 head
- 2.3 turn signal
- 2.4 brake
- 2.5 reverse
- 2.6 hazard
- 2.7 horn
- 2.8 dome light
- 2.9 door light

Table 4 Distribution of Statistics, Frequency, percentage distribution, mean, percentage of correct responses and standard deviation on respondents Pretest written score

Range	Description	Frequency	Percentage distribution
17-20	Very good	0	0.00%
13-16	Good	4	9.09%
9-12	Fair	29	65.91%
5-8	Poor	11	25.00%
0-4	Very Poor	0	0.00%
		44	100.00%

Mean 9.98

Standard Deviation 1.96

HEADLIGHT	Percentage of correct responses	Standard Deviation
1. Type of automotive lighting that provides high illumination during night time. It has a high beam and low beam operation.	100.00%	0.00
2. Which of the following is a circuit device that helps protect the head light switch by operating the high current load through low current supply?	54.55%	0.50
3. In most modern automobiles, the chassis can act as a ground because it is connected to	81.82%	0.39
PARK/TAIL		
4. Which of the following circuit is incorporated to the operation of headlight switch?	50.00%	0.51

AUTOMOTIVE LIGHTING SYSTEM SIMULATOR

5. Which of the following is not part of the park and tail light circuit	77.27%	0.42
TURN SIGNAL		
6. A device that provides flashing action of the hazard and turn signal light	70.45%	0.46
7. Where is the location of turn signal light switch	31.82%	0.47
BRAKE LIGHT		
8. Which of the following is the best way to describe the brake light	63.64%	0.49
9. Which of the following lamp that provides backups the brake light operation	6.82%	0.25
REVERSE LIGHT		
10. Reverse light will ON if the driver turns the shift lever to reverse position. Where is the location of the reverse switch	47.73%	0.51
11. What is the purpose of reverse lamp in an automotive lighting system	59.09%	0.50
HAZARD LIGHT		
12. When the hazard switch is turn ON. What lamp will illuminate	88.64%	0.32
13. In what instances thus the hazard light will turn ON	70.45%	0.46
HORN		
14. Horn sounds is measured through unit decibels. What is the standard decibels of automotive horn	9.09%	0.29
15. What type of switch use in the horn circuit	38.64%	0.49
16. Which of the following do automotive horns use to operate	9.09%	0.29
DOME		
17. Which of the following is the correct pathways of dome light circuit Indicator	31.82%	0.47
17. Which is true about dome light	9.09%	0.29
DOOR		
18. The door lamp indicator in the dash board will illuminate when	81.82%	0.39
19. Which of the following best describe the door lamp	15.91%	0.37

The data shows that majority sixty-six percent (66%) of respondents pretest written score is fair. The over all rating is also fair (mean= 9.98). The standard deviation of 1.96 indicates that the respondent pretest written varies a lot from each other.

This means there are variations in respondents' competencies in each topic. While some students perform good, substantial number of students perform poo in the written pretest.

Table 5 Distribution of Statistics, Frequency, percentage distribution mean, description and standard deviation respondents Pretest Practical score

Range	Description	Frequency	Percentage distribution
25-30	Very good	0	0.00%
19-24	Good	2	4.55%
13-18	Fair	18	40.91%

7-12	Poor	24	54.55%
0-6	Very Poor	0	0.00%
		44	100.00%

Mean 13.23

Standard Deviation 1.92

	Percentage Of students that can	Percentage Of students that can't
General parts		
1.Check the battery voltage	100.00%	0.00%
2.Check the fuse and fuse box condition	100.00%	0.00%
3.Check the wirings and terminal condition	100.00%	0.00%
Park and Tail		
4.Diagnose the trouble in park and tail light circuit	100.00%	0.00%
5.Identify the trouble in park and tail light circuit	0.00%	100.00%
6.Repair the problem in park and tail light circuit	0.00%	100.00%
Headlight		
7.Diagnose the trouble in headlight circuit	100.00%	0.00%
8.Identify the trouble in headlight circuit	0.00%	100.00%
9.Repair the problem in headlight circuit	0.00%	100.00%
Turn Signal		
10.Diagnose the trouble in turn signal light circuit	100.00%	0.00%
11.Identify the trouble in turn signal light circuit	6.82%	93.18%
12.Repair the problem in turn signal light circuit	0.00%	100.00%
Brake light		
13.Diagnose the trouble in brake light circuit	100.00%	0.00%
14.Identify the trouble in brake light circuit	0.00%	100.00%
15.Repair the problem in brake light circuit	0.00%	100.00%
Revere light		
16.Diagnose the trouble in reverse light circuit	100.00%	0.00%
17.Identify the trouble in reverse light circuit	4.55%	95.45%
18.Repair the problem in reverse light circuit	4.55%	95.45%
Hazard light		
19.Diagnose the trouble in hazard light circuit	100.00%	0.00%
20.Identify the trouble in hazard light circuit	13.64%	86.36%
21.Repair the problem in hazard light circuit	13.64%	86.36%
Horn circuit		

22. Diagnose the trouble in horn circuit	100.00%	0.00%
23. Identify the trouble in horn circuit	4.55%	95.45%
24. Repair the problem in horn circuit	4.55%	95.45%
Dome light		
25. Diagnose the trouble in dome light circuit	100.00%	0.00%
26. Identify the trouble in dome light circuit	15.91%	84.09%
27. Repair the problem in dome light circuit	15.91%	84.09%
Door light		
28. Diagnose the trouble in door light circuit	100.00%	0.00%
29. Identify the trouble in door light circuit	20.45%	79.55%
30. Repair the problem in door light circuit	18.18%	81.82%

The data shows that majority fifty-five percent (55%) of respondents pretest practical score is poor. The over-all rating is categorically fair (mean= 13.23). The standard deviation of 1.92 indicates that the respondent pretest practical score varies a lot from each other.

The data further shows that more than eighty percent (80%) cannot perform practical test in most competencies. While a number of competencies were accomplished by most respondents, this is because these classified competencies are very basic. But as the competency measure in pretest practical test increase in difficulty. Their capacity to perform as desired decrease.

Problem 3 What is the respondents Post-test written and practical score in terms of

- 2.1 Park/tail
- 2.2 head
- 2.3 turn signal
- 2.4 brake
- 2.5 reverse
- 2.6 hazard
- 2.7 horn
- 2.8 dome light
- 2.9 door light

Table 6 Distribution of Statistics, Frequency, percentage distribution mean, description and standard deviation respondents Posttest written score

Range	Description	Frequency	Percentage distribution
17-20	Very good	35	79.55%
13-16	Good	9	20.45%
9-12	Fair	0	0.00%
5-8	Poor	0	0.00%
0-4	Very Poor	0	0.00%
		44	100.00%

Mean 17.95

Standard Deviation 1.58

HEADLIGHT	Percentage of Correct Responses	SD
1. Type of automotive lighting that	100.00%	0.00

provides high illumination during night time. It has a high beam and low beam operation.		
2. Which of the following is a circuit device that helps protect the head light switch by operating the high current load through low current supply?	100.00%	0.00
20. In most modern automobiles, the chassis can act as a ground because it is connected to	90.91%	0.29
PARKTAIL		
3. Which of the following circuit is incorporated to the operation of headlight switch?	93.18%	0.25
4. Which of the following is not part of the park and tail light circuit	79.55%	0.41
TURN SIGNAL		
5. A device that provides flashing action of the hazard and turn signal light	93.18%	0.25
6. Where is the location of turn signal light switch	90.91%	0.29
BRAKE LIGHT		
7. Which of the following is the best way to describe the brake light	90.91%	0.29
8. Which of the following lamp that provides backups the brake light operation	72.73%	0.45
REVERSE LIGHT		
9. Reverse light will ON if the driver turns the shift lever to reverse position. Where is the location of the reverse switch	84.09%	0.37
10. What is the purpose of reverse lamp in an automotive lighting system	84.09%	0.37
HAZARD LIGHT		
11. When the hazard switch is turn ON. What lamp will illuminate	95.45%	0.21
12. In what instances thus the hazard light will turn ON	93.18%	0.25
HORN		
13. Horn sounds is measured through unit decibels. What is the standard decibels of automotive horn	93.18%	0.25
14. What type of switch use in the horn circuit	84.09%	0.37
19. Which of the following do automotive horns use to operate	95.45%	0.21
DOMES		
15. Which of the following is the correct pathways of dome light circuit	86.36%	0.35
Indicator		
16. Which is true about dome light	86.36%	0.35
DOOR		
17. The door lamp indicator in the dash board will illuminate when	88.64%	0.32
18. Which of the following best describe the door lamp	93.18%	0.25
Indicator		

The data shows that majority eighty percent (80%) of respondents' post-test written score is very good. The over-all rating is also very good (mean= 17.95). The standard deviation of 1.58 indicates that the respondent posttest written still varies a lot from each other.

Though the data shows that majority of the students are classified as very good, substantial number of students remained to be classified as just good. The percentage of correct responses have increase, minimum of seventy-three percent of correct responses for every competency in the written posttest. But the data shows it is not perfect. However, the standard deviation across each competency indicates similarity of closeness of score, as a whole. The respondents' post-test still varies. This may be due to the difficulty of some items.

Table 7 Distribution of Statistics, Frequency, percentage distribution mean, description and standard deviation respondents Post-test Practical score

Mean of 3 Evaluators

Range	Description	Frequency	Percentage distribution
25-30	Very good	37	84.09%
19-24	Good	7	15.91%
13-18	Fair	0	0.00%
7-12	Poor	0	0.00%
0-6	Very Poor	0	0.00%
		44	100.00%

Mean 27.41

Standard Deviation 2.52

	Percentage Of students that can	Percentage Of students that can't
General parts		
1.Check the battery voltage	100.00%	0.00%
2.Check the fuse and fuse box condition	100.00%	0.00%
3.Check the wirings and terminal condition	100.00%	0.00%
Park and Tail		
4.Diagnose the trouble in park and tail light circuit	100.00%	0.00%
5.Identify the trouble in park and tail light circuit	93.18%	6.82%
6.Repair the problem in park and tail light circuit	77.27%	22.73%
Headlight		
7.Diagnose the trouble in headlight circuit	100.00%	0.00%
8.Identify the trouble in headlight circuit	88.64%	11.36%
9.Repair the problem in headlight circuit	68.18%	31.82%
Turn Signal		
10.Diagnose the trouble in turn signal	100.00%	0.00%

light circuit		
11.Identify the trouble in turn signal light circuit	90.91%	9.09%
12.Repair the problem in turn signal light circuit	86.36%	13.64%
Brake light		
13.Diagnose the trouble in brake light circuit	100.00%	0.00%
14.Identify the trouble in brake light circuit	93.18%	6.82%
15.Repair the problem in brake light circuit	65.91%	34.09%
Revere light		
16.Diagnose the trouble in reverse light circuit	100.00%	0.00%
17.Identify the trouble in reverse light circuit	86.36%	13.64%
18.Repair the problem in reverse light circuit	72.73%	27.27%
Hazard light		
19.Diagnose the trouble in hazard light circuit	100.00%	0.00%
20.Identify the trouble in hazard light circuit	93.18%	6.82%
21.Repair the problem in hazard light circuit	90.91%	9.09%
Horn circuit		
22.Diagnose the trouble in horn circuit	100.00%	0.00%
23.Identify the trouble in horn circuit	90.91%	9.09%
24.Repair the problem in horn circuit	59.09%	40.91%
Dome light		
25.Diagnose the trouble in dome light circuit	100.00%	0.00%
26.Identify the trouble in dome light circuit	95.45%	4.55%
27.Repair the problem in dome light circuit	93.18%	6.82%
Door light		
28.Diagnose the trouble in door light circuit	100.00%	0.00%
29.Identify the trouble in door light circuit	97.73%	2.27%
30.Repair the problem in door light circuit	97.73%	2.27%

The data shows that majority eighty-four percent (84%) of respondents' post-test practical score is very good, as evaluated by 3 experts. The over-all rating is also very good

(mean= 27.41). The standard deviation of 2.52 indicates that the respondent post-test practical as evaluated by 3 experts varies a lot from each other.

The data shows though majority of the respondents are can in all competencies. There are instances that a number of respondent cannot perform as desired by the experts. Considering that there are three experts, this mean three different level of high standards. This is perhaps would explain the standard deviation of 2.52. However as a whole the respondent posttest practical is classified as very good.

Problem 4. Is there any significant difference in respondent's pre-test and post-test written and practical scores?

Table 8 Distribution of statistic (one-tailed T-test) written and practical scores when grouped according to type of test

category	Groups		P-value	T stat
	Pretest	Posttest		
Written	n=44 Mean=9.97	n=44 Mean=17.95	4.7×10^{-35}	21.00**
Practical	n=44 Mean=13.23	n=44 Mean=27.41	2.64×10^{-45}	20.73**

** highly significant

The table shows the distribution of statistics (one tailed T-test) written and practical scores when grouped according to type of test. There were two groups being compared: pretest and posttest.

The null hypothesis, there is that the pretest written is greater than the posttest written is rejected. The result indicates that the posttest written is significant higher than the pretest written ($T=20.00^{**}$).

In addition, in terms of practical test, the null hypothesis, there is that the pretest practical is greater than the posttest practical is rejected. The result indicates that the posttest practical is significant higher than the pretest practical ($T=20.73^{**}$).

Based on the test-statistics in can be inferred that the trainer has been very effective increasing respondents score both in written and practical evaluation.

Problem 5. To what extend does input and process variable explain the results in the output variable?

Table 9 Multiple linear regression analysis between the whole set of input and process variable and respondents output variable Post-test written

Independent variable	Regression coefficient	P- Value	T- Value
Gender	0.60	0.2645	1.134NS
Father's income	0.27	0.3199	1.009NS
Mother's income	-0.16	0.5156	-0.657NS
Current # of units	-0.04	0.8635	-0.173NS
Purpose of taking course	0.09	0.6490	0.459NS
Total attendance	0.41	0.2220	1.244NS
Participation	0.14	0.0233	2.374*
Pretest written	0.00	0.9988	0.002NS
Pretest practical	0.05	0.7004	0.388NS

NS Not significant * Significant

Constant : 12.99

Adjusted R : 0.13

F- Value: 1.68

P-value: 0.130

Significance Level: Not significant

The Table shows that the regression model is not significant. The null hypothesis is accepted. This signifies that input and process variable have no significant effect on respondents' posttest written.

The value of adjusted coefficient of multiple determination is 0.13 which explains that 13% of the total variation of respondents' output variable is explained by the variation input and process variable. The remaining 87% percent can be explained by other reasons or variables.

This basically means that respondent written post-test is not influenced or affected by the respondents Gender, Father's income, Mother's income, Current # of units, Purpose of taking course, Total attendance, Pretest written and Pretest practical. However, individually participation have a significant effect in respondents' post-test written.

Though in most instances, input and process variable affects the output variable, however in this study only participation have a significant effect in respondents written posttest. This maybe due to the fact that since most of the respondents are male, have a strong tendency to be less pragmatic would constitute to the result in the model. It is also possible that the respondents written practical score can be affected with strong direct relationship to the competencies such as their participation during the study.

Table 12 Multiple linear regression analysis between the whole set of input and process variable and respondents output variable Post-test written

Independent variable	Regression coefficient	P- Value	T- Value
Gender	0.92	0.2895	1.076
Father's income	0.52	0.2398	1.196
Mother's income	-0.04	0.9247	-0.095
Current # of units	0.86	0.0347	2.200*
Purpose of taking course	0.68	0.0354	2.190*
Total attendance	1.42	0.0123	2.641**
Participation	0.02	0.7915	0.266
Pretest written	0.27	0.2102	1.277
Pretest practical	0.22	0.3064	1.038

NS Not significant * Significant ** Highly Significant

Constant : 4.04

Adjusted R : 0.10

F- Value: 1.52

P-value: 0.178

Significance Level: Not significant

The Table shows that the regression model is not significant. The null hypothesis is accepted. This signifies that input and process variable have no significant effect on respondents' posttest practical.

The value of adjusted coefficient of multiple determination is 0.10 which explains that 10% of the total variation of respondents' output variable is explained by the variation input and process variable. The remaining 90% percent can be explained by other reasons or variables.

Though as a whole there is so no absolute bond between the theoretical model and respondents' performance both in written and practical. There is significant and highly significant effect in individual variables to the respondents' post-test practical exam. Specifically, on Current number of units, Purpose of taking course and attendance to practical posttest of students. And participation in written posttest.

Setting aside the theoretical model, IPO and focusing on the Outcome which is the innovation the automotive lighting simulator as a whole the study has been very effective. The posttest both written and practical is significantly greater than the pretest.

IV. CONCLUSIONS AND IMPLICATIONS

The trainer automotive lighting system simulator has been effective in increasing students performance based pretest posttest test statistics. The highly significant difference from pretest to posttest can be accounted to the trainer. Based on the data, though not all, some variables in the input and process out had significant, and highly significant effect on posttest written and practical.

V. RECOMMENDATIONS

On the basis of the findings the following recommendations are presented.

The administration is recommended to strengthen research innovation that enhances students' performance.

Teachers are requested to innovate or use the automotive lighting system to address competency gap of the automotive student in automotive lighting system and providing relevant laboratory tools that replicate the ideal set up of automotive lighting system troubles, operations and circuits.

The students are highly motivated to maximize and appreciate actual visualization of the electrical lighting system set up and actual wire troubles, in order to familiarize the operation and behavior of its components.

REFERENCES CITED

1. Ajao, A., Bamgboyes, O., Kadiri, K. (2014). *Local fabrication of digital logic trainer for lab demonstration*. Washington DC: National Academics Press.
2. Back-up Light (n.d). Retrieved November 11, 2012 from <http://autosystempro.com/exteriorlights>.
3. Benzal et al. (2013). "The effectiveness of a toyota 4k cut-away manual transmission and clutch mock-up as a teaching-learning tool for the subject aet 133". MSU-Iligan Institute of Technology. Iligan City.
4. Bransford J., Brown A. and Cocking R. (2000). *How people learn: brain, mind, experience, and school*. National Reasearch Council, Washington DC: National Academics Press.
5. Calinga et al. (2012). Evaluating the performance and effectiveness of an improvised water cooling system mock-up for a mitsubishi 4D56 diesel engine. MSU-Iligan Institute of Technology .Iligan City.
6. Diploma in Automotive Engineering Technology, n.d. Retrieved January 2015 from <http://msuiit.edu.com/DAUET>
7. Effectiveness, (2004). Retrieved December 12, 2009 from <http://wikionlinethechnicaldictionary/effectiveness>
8. Electrical Connector (n.d). Retrieved February 19, 2012 from http://en.wikipedia.org/wiki/Electrical_connector
9. Eusebio, L. (2014.) IPO framework. Retrieved December 23, 2017 from <https://prezi.com/tggh0qiekkksa/theoretical-framework-conceptual-framework-and-paradigm-of-fabrication>
10. Fabrication, (2014). Retrieved December 10, 2014 from <http://freeonlinetechicaldictionary/fabrication>
11. Flasher, (2002). Retrieved September 6, 2013 from <http://wikipedia.com.ph/flashers>
12. Functionality (n. d). Retrieved February 12, 2013 from <http://freeonlinetechicaldictionary/fabrication>
13. Fuses, different types (2012). Retrieved November 7, 2011 from <http://www.electricaltechnology.org/2014/11/fuse-types-of-fuses.html#>
14. Grabianowski, E. (2008). How brake light wiring works. Retrieved August 11, 2001 from <http://howstuffworks/howbrakelightwiringworks/>
15. Gutiérrez-Artacho, J., and Olvera-Lobo, M. (2017). Web Localization of Spanish SMEs: The Case of Study in Chemical Sector. Journal of Information Systems Engineering & Management, 2(3), 15. <https://doi.org/10.20897/jisem.201715>
16. Headlight Circuit (2000). Retrieved February 20, 2012 from <http://6772chevytrucks.com/vboard/showthread.php?t=509285>
17. Hollembeak, J. (2010). Retrived June 18, 2013 from <http://howstuffworks.com/howbrakelightsfunctions.html>
18. Hollembeak, J. and Evanjec C. (2002). Retrived March 11, 2011 from <http://howstuffworks.com/bulbsilluminates/autobulbs>
19. Jones A. and Barlett, D. (2008). *Park and tail light circuit (pp. 41-44)*. Burlington MA: Ascend Learning Company
20. Knowles L. and Don B. (2005). *Techone: basic automotive service and maintenance*. United States of America: Thomson Delmar Learning, Inc
21. Lighting Circuits (2011). Retrieved May 14, 2009 from <http://cdtextbook.com/electrical/chargStartLight/circuits/spciruit.html>
22. Mirzamasoumzadeh, B., & Mollasadeghi, V. (2013). EFFECTS OF OSMOTIC STRESS ON CHLOROPHYLL AND PROLINE DIFFERENTWHEAT CULTIVARS, UCT Journal of Research in Science, Engineering and Technology, 1(1): 12-13.
23. Mukanbetkaliyev, A., Amandykova, S., Zhambaye, Y., Duskazyieva, Z., & Alimbetova, A. (2018). The aspects of legal regulation on staffing of procuratorial authorities of the Russian Federation and the Republic of Kazakhstan. Opción, 34(85), 187-216.
24. Park, L. and Kimbrough P., (2011).Automotive wiring; A Practical Guide To Wiring Your Hot Rod Or Custom Car 4(11), 11-7. Minneapolis, USA.MBI Publishing Company.
25. Relay Wiring Basics (2008). Retrieved May 10,2010 from <http://tech.240sxone.com/relaydiagram>
26. Switches (2002). Retrieved April 11. 2003 from <http://wikipediaonlineencyclopedia/electricalswitches>
27. Shuttleworth (2009).Pretest-Posttest Designs. Retrieved March 8, 2014 from Expolable.com: <https://explorable.com/pretest-posttest-designs>
28. Turn Signals (n.d). Retrieved August 4,2009 from <http://www.knucklebusterinc.com/features/2009/08/04/led-turn-signals/>
29. Wordenweber,B., Wallaschek,J., BoyceP., Hoffman,D. (2007). *Automotive lighting and human vision 3rd edition*.United States of America: Cengage Learning, Inc
30. Vieru, T.C (2009). Mock-up. Retrieved November 12, 2012 from <http://wikipediamodified/importanceofmock-up/>