
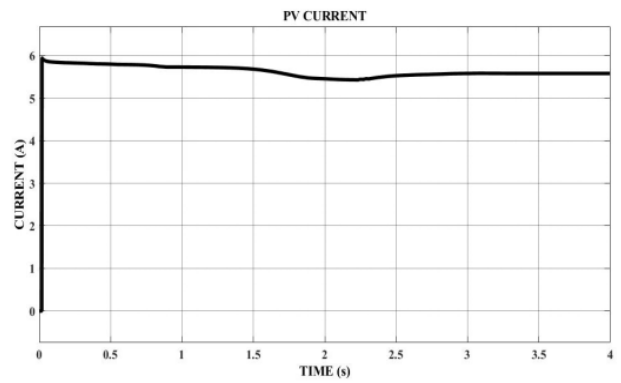


Fig 4 Simulink model of a solar array feeding power to a single phase grid with mppt.



Table 2: Current, Voltage and Power from PV array during maximum power point extraction

Irradiance (W/m ²)	Gain for reference current	V _{mp} (V)	I _{mp} (A)	PV panel power (W)
1000	26.32	391	5.418	2108
900	21.09	413	4.006	1704
800	17.02	421.5	2.961	1375
700	14.1	418	2.72	1150
600	12.36	416.5	2.37	988
500	11.7	405	2.31	900
400	12.34	390	2.15	840
300	14.07	300	1.9	540
200	16.96	172	1.25	210
100	20.9	169	0.65	110



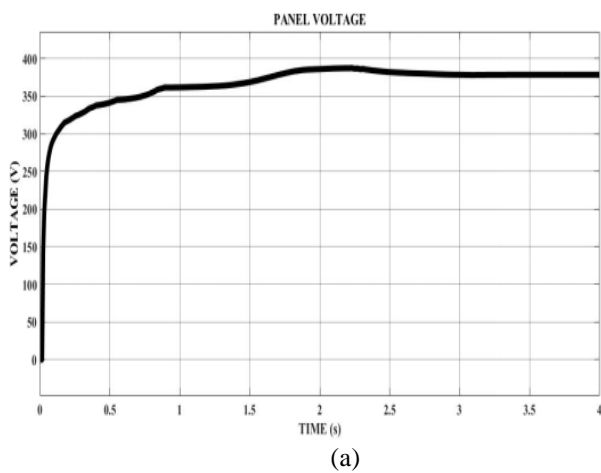


(b)

Fig. 5 (a) Panel voltage (b) panel current for irradiation of 1000W/sq.m

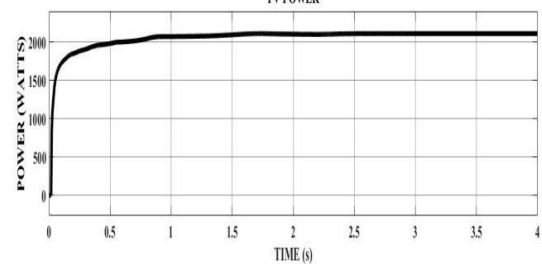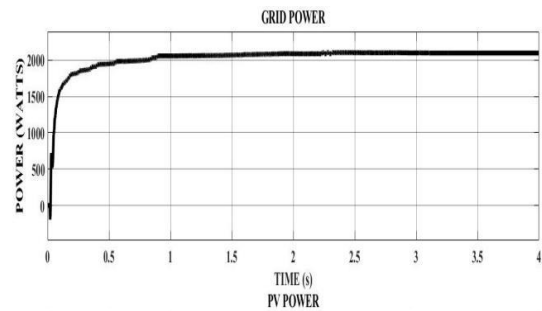


(a)

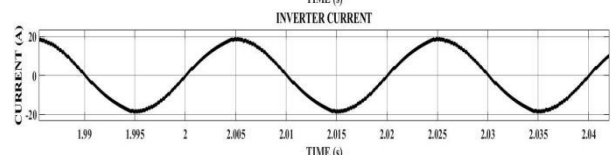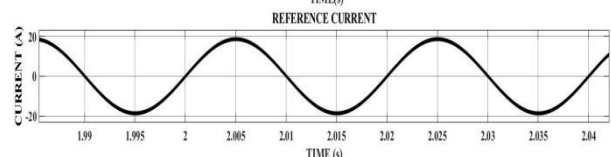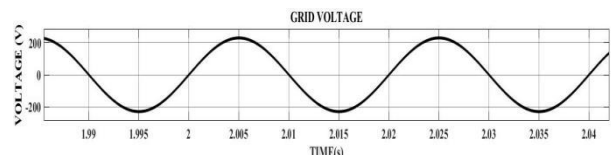



(b)

Fig. 6 (a) Power balance of the system at an irradiation of 1000W/sq.m

(b) Grid voltage, reference current and inverter current for irradiation of 1000W/sq.m

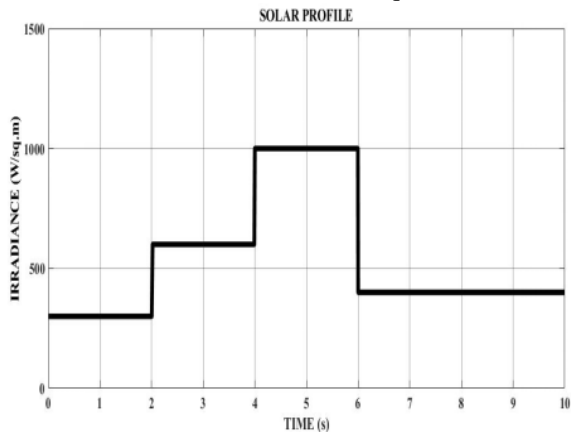

(a)

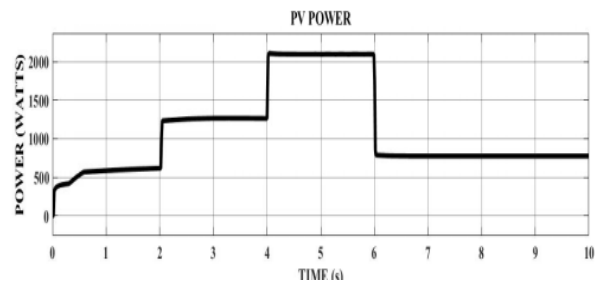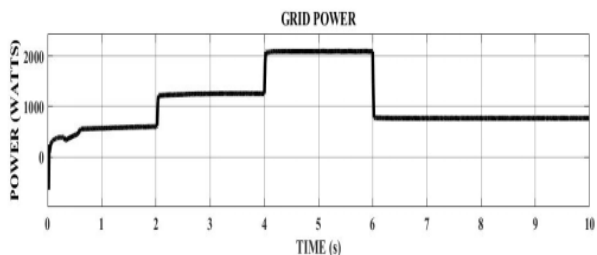

(b)

Fig 7: (a) Solar irradiation (b) Power fed to grid and power generated from solar panel

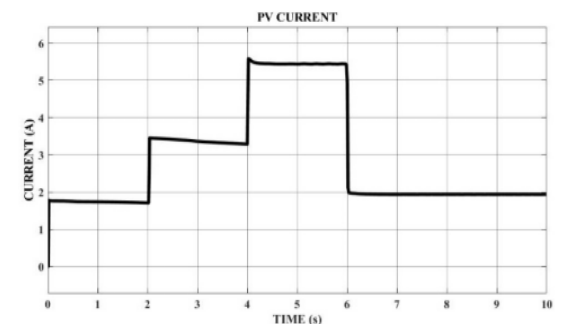
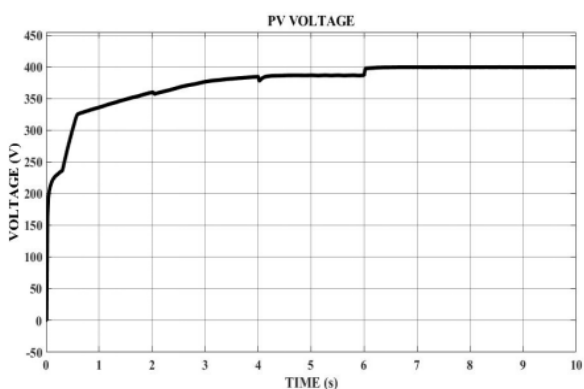


Fig 8: PV panel voltage and current corresponding to MPPT

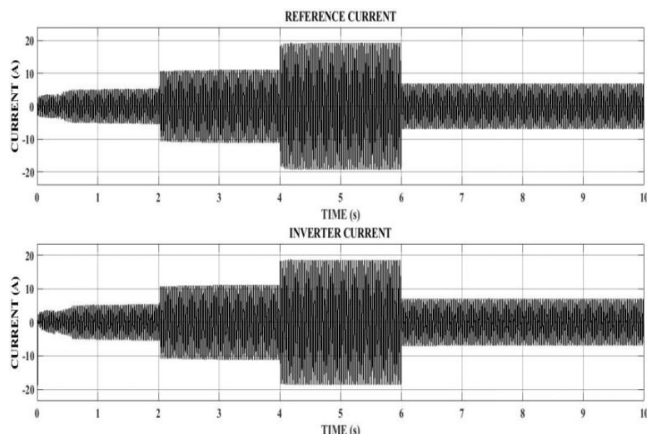


Fig 9: Reference current and inverter current

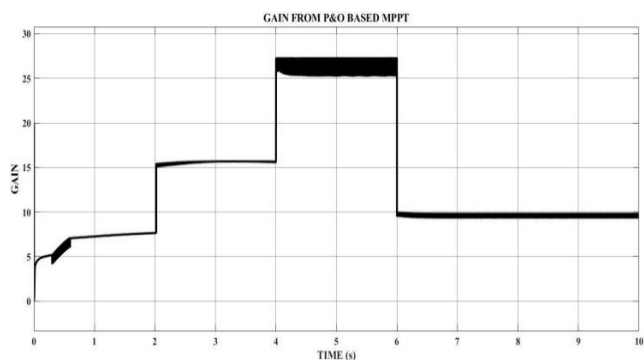


Fig 10: Gain output from P&O based MPPT algorithm

V.CONCLUSION

In this work, an algorithm is depicted in order to inject maximum power to a single phase grid from a PV module. There are several algorithms proposed to extract peak power from the solar panel. In this paper, perturb and observe method is used for extracting the peak power. The grid is synchronized with the single phase full bridge inverter with the help of hysteresis current control strategy. The gain value given for the reference current in hysteresis controller is varied to track the maximum power point. Results show that the reference current is tracked efficiently for different irradiancies by the proposed control algorithm. This work can further be implemented in hardware using STM microcontroller. Furthermore this control algorithm can also be extended to three phase grid connected inverters and compared with sinusoidal and space vector based pulse width modulation methods.

REFERENCES

1. H.Habeebullah Sait, S.Arul Daniel, "New control paradigm for integration of photovoltaic energy sources with utility network", *International Journal of Electrical power and energy systems*, pp. 86-93, 2010.
2. D. Popa, M. Nicolae, P. Nicolae and M. Popescu, "Design and simulation of a 10 MW photovoltaic power plant using MATLAB and Simulink," *IEEE International Power Electronics and Motion Control Conference*, pp. 378-383,2016.



3. S. Raja Mohamed, P. Aruna Jeyanthy, D. Devaraj, "Hysteresis based voltage and current control techniques for grid connected solar photo voltaic systems: A comparative study" *International Journal Electrical and Computer Engineering*, Vol. 8, No. 5, pp. 2671-2681,2018.
4. G. Escobar, S. Pettersson and C. N. M. Ho, "Control of single-phase inverter connected to the grid through an LCL filter," *IECON 2012 - 38th Annual Conference on IEEE Industrial Electronics Society*, pp. 3406-3411,2012.
5. M.Jayakumar, V.Vanitha, V.Jaisuriya, M.Karthikeyan, George Daniel, T.Vignesh, "Maximum power point tracking of a solar PV array using single stage three phase inverter", *International Journal of Engineering and Technology*, pp.97-100, 2018.
6. Nithya Ramesh, V.Vanitha,"Solar powered Battery charging system with Maximum Power Point Tracking", *4th International Conference on Electrical Energy Systems*, pp.364-368, 2018.
7. Vijayakumari, A., A. T. Devarajan, and S. R. Mohanrajan. "Power angle control of a single phase grid connected photovoltaic inverter for controlled power transfer." *Proceedings of the International Conference on Soft Computing Systems*. Springer, 2016.

AUTHORS PROFILE



Mr. Sivakumar S received his bachelor's degree in Electrical and Electronics Engineering from School of Engineering, Amrita Vishwa Vidyapeetham, Coimbatore in 2019. His areas of interest include Power systems and Power Electronics.



Dr. Vanitha V currently serves as Assistant Professor(SG) in the Department of Electrical and Electronics Engineering, Amrita Vishwa Vidyapeetham, Coimbatore. Dr. Vanitha received her Ph. D. from Anna University, Chennai. Her areas of interest are renewable energy, power system and electrical machines.



Mr. Mohanrajan S.R currently serves as Assistant Professor (SR) in the Department of Electrical and Electronics Engineering, School of Engineering, Amrita Vishwa Vidyapeetham, Coimbatore. His areas of research include Renewable Energy and Smart Grid.