

Design and Analysis of Circular Monopole antenna for WLAN and WI-Max Application in S band

Bhavna Sharma, Punam Rani, Prachi Gupta

Abstract: In today's existence, the technology for communication is continuously growing. The agile achievement in ultra-broadband antennas in wireless communication is increased. A circular monopole microstrip patch antenna has been developed in this research paper. The parameters grandiose by antenna performance are researched. The design is designed to achieve desired gain and bandwidth at 2.4 GHz frequency, with a defected ground system (DGS). This antenna design has been effectuated using FR-4 as the dielectric substrate with 4.3 as dielectric constant. In computer simulation technology (CST) the model monopole circular microstrip patch antenna is simulated and the results needed are achieved. The S11 parameter is obtained as -17.28 decibels which is below -10 decibel. The gain obtained at 2.4 GHz frequency is 1.730 decibel. Application in S band devices, including Wi-Max, WLAN, radio altimeter, cordless phones, wireless headphones etc., were built in this research article.

Keywords: DGS, Monopole circular Microstrip patch antenna, CST, Gain

I. INTRODUCTION

In wireless electronic equipment market, the stipulation or demand of small size appliance is high because they require less space and the heat sinking is also easy due to advanced technology and availability of space. For a reduced size wireless system, we need to reduce the size of antenna used in that system. The antenna we are mainly designing in this research paper is used in Wi-MAX, WLAN, radio altimeter, cordless telephone and weather radar system. A number of antennas have been designed to meet the prerequisite of these systems [1]. For providing a perfect antenna for this requirement we study a no of publish papers to get the knowledge of design and measurements of antenna. The overall nature of antenna depends on our specific requirements, such as how we work or how we apply them. S band antennas have microwave, Nano satellite, missiles and GPS radar applications etc., [2-5]. In the field of wireless communications, Microstrip patch antennas are extensively used and satellite navigation because of their low profile properties, low weight, low weight, compliance and easy integration into active devices[6-8]. The employment of Microstrip antenna is an attainment in Wireless communication system and it is fulfilling the necessity of wireless communication in its new innovations using their planar structure and economic efficiency.

Revised Manuscript Received on July 10, 2020.

* Correspondence Author

Bhavna Sharma*, Mtech ECE Student, CT University, Ludhiana Ferozepur road, India. E-mail: bhavnasharma2203@gmail.com

Dr Punam Rani, Associate Prof Head Of School, CT University, Ludhiana Ferozepur road, India. E-mail: punamrattan.17382@ctuniversity

Prachi Gupta, Asst Prof EE, MIET, Jammu, India. E-mail: prachi.ee@mietjammu.in

Microstrip patch antenna has a narrow operating bandwidth which imposes restrictions on its use in wireless communication system but propitiously many communication systems don't require larger bandwidth, therefore it's not a major problem. In our day to day life we need broadband applications and wireless devices to perform various tasks. These antenna persuades major prerequisite for mobile and satellite equipment, and many business demands are satisfied utilizing it [9-11]. Microstrip patch antenna have proven to be splendid and effectively used for 5g applications because of compact design and are easy to install [12-13]. The Microstrip Antenna is called the patch antenna because it is made of metal patch from one side of the substratum and metallic floor plane from another side of the substratum. The main part of the patch antenna is the metallic top patch used for antenna radiation. [14]. With respect to circuit theory, in order to allow maximum transfer of electric signal energy from source to spot, electrical resistance should correspond between spare and feedline. The electrical signals must have fed to patch either by contacting or non-contacting method. Microstrip line component is employed in contacting method to provide the electrical signal power to the patch. One the contrary, electrical signal power between the microstrip line and the patch can be supplied when is method is non-contacting. [15-16]. Antenna efficiency is calculated by the microstrip feedline. An excellent match between patch and feedline enhances antenna performance and therefore increases its bandwidth. An incomplete match impedes its efficiency and inevitably lowers the bandwidth information limit. One of the fundamental form of the Microstrip antenna can be assembled using dielectric substrate as a base material and a radiating conducting material itched on the upper side of the substrate. The shape of the radiating conducting material can be of any geometrical shape as a basic form or some other common shape for the simplification of the performance analysis of the antenna [17-18]. The antenna developed in this paper is circular monopole antenna working at 2.4 GHz which lies in S band; a defect in the ground is also added during the implementation of the system to expand the gain and bandwidth and to provide better S11 parameter. In Defected ground structure (DGS) technique slots or defects are introduced on the ground plane of microwave planar circuits which aids to improvise various parameters of RMPA, including low gain, cross-polarization, tapering bandwidth, etc.

II. ANTENNA GEOMETRY AND DESIGNING

The recommended circular monopole antenna element is prepared for WLAN and WI-MAX applications by using FR-4 as a dielectric substratum material with a height of 0.8mm operating at 2.4 GHz , which is a millimeter wave frequency in the S band with relative permittivity $\epsilon_r = 4.3$. The maximum size of the proposed microstrip patch antenna is $32 \times 36 \times 0.8 \text{ mm}^3$. This compact antenna is fed with coaxial feed so that desired results can be obtained . Length of first feedline is $L_1 = 4.1 \text{ mm}$ and its width $W_1 = 1 \text{ mm}$, whereas second feedline is used of length $L_f = 14.8 \text{ mm}$ and width $W_f = 4.2 \text{ mm}$. Height of patch from the centre to the second feedline is $S = 8.8 \text{ mm}$. This design is simulated on software for computer simulation technology (CST). The design was implemented at a frequency of 2.4GHz. This monopole antenna part was designed as the substratum with a dielectric constant of 4.3 using FR4 (lossy). Because the dielectric constant of FR-4 is utterly high, it has proven beneficial to reduce antenna size and thus make it robust and stable.

Table 1. Optimized dimension of the proposed antenna

Geometry Parameter	Notation	Dimension of geometry in mm
Radius of patch	R	8
Substrate length	L	36
Substrate width	W	32
Substrate height	h	0.8
Feed length	L_f	14.8
Feed width	W_f	4.2
Ground Length	L	36
Ground Width	W	3

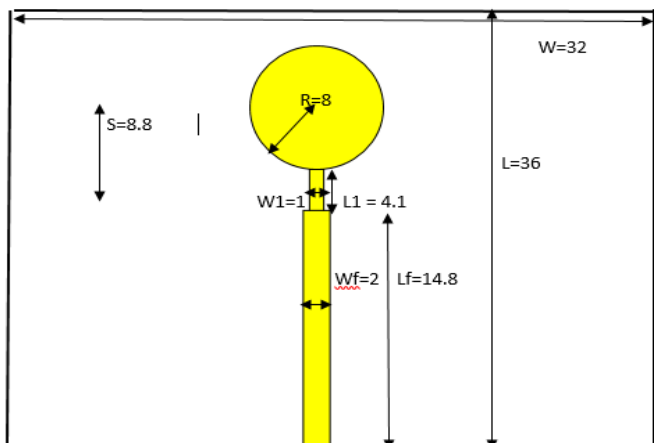


Fig 1 : Structure of Circular Monopole Antenna Proposed

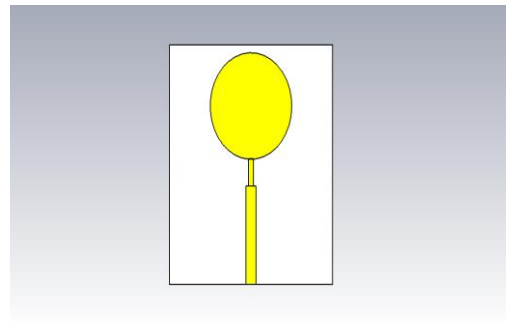


Fig 1a : Proposed Antenna Design (Front view)

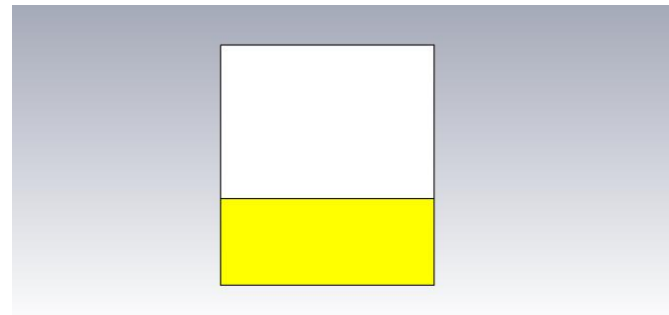


Fig 1b : Proposed Antenna Design (Back view)

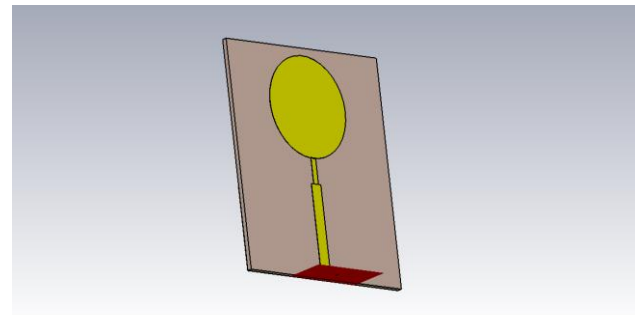


Fig 1c : Proposed Antenna Design (3d view)

III. PERFORMANCE OF THE ANTENNA AND DEBATE

1. S-Parameter

The coefficient of reflection or the parameter S11 explains the relation between the ports' input output power in an antenna. When $S_{11} = 0$, it means antenna does not radiate at all and the S - parameter must be 10dB or less for antenna to resonate. S11 appears to be -17.289267 decible at 2.403 GHz frequency in this proposed antenna configuration.



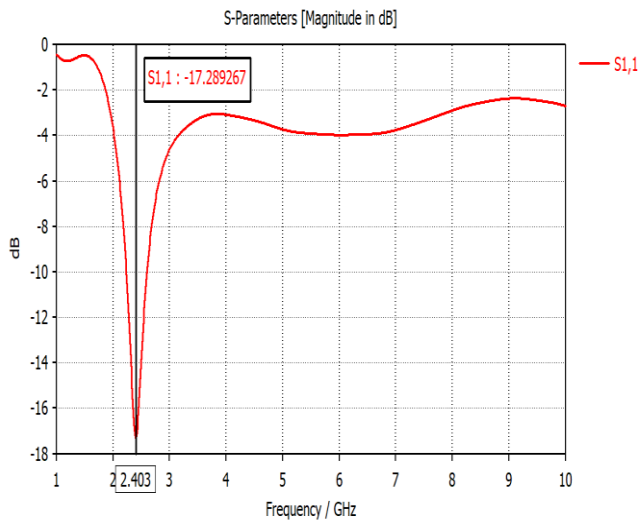


Fig.2 Reflection coefficient is -17.28 dB at 2.4 GHz frequency

2. . Voltage Standing Wave Ratio

In a RF system, VSWR gives impedance that matches the transmission line at the load. The designed antenna delivers VSWR at 2.4 GHz frequency as 1.31. The standing wave voltage diagram is shown in fig hereafter.

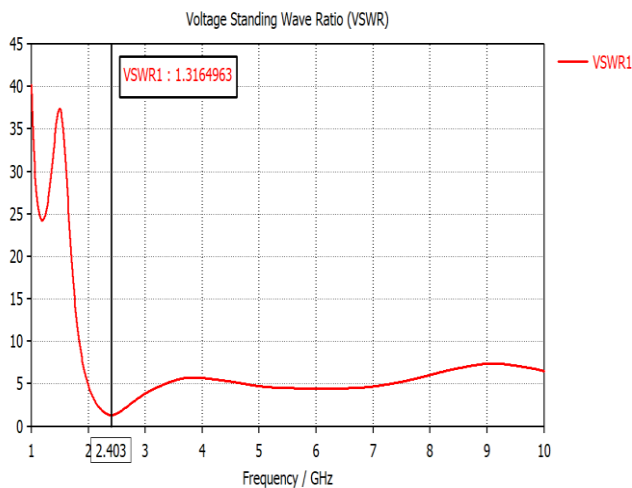


Fig 3: VSWR is about 1.31 at 2.4 GHz frequency

2. Gain

The antenna gain informs us how much power an antenna can deliver in the defined direction.

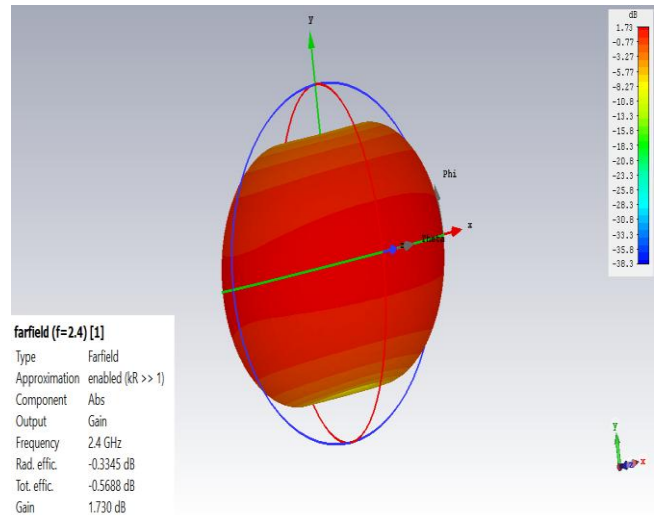


Fig 4: 3D Gain is 1.73 dB at 2.4 GHz

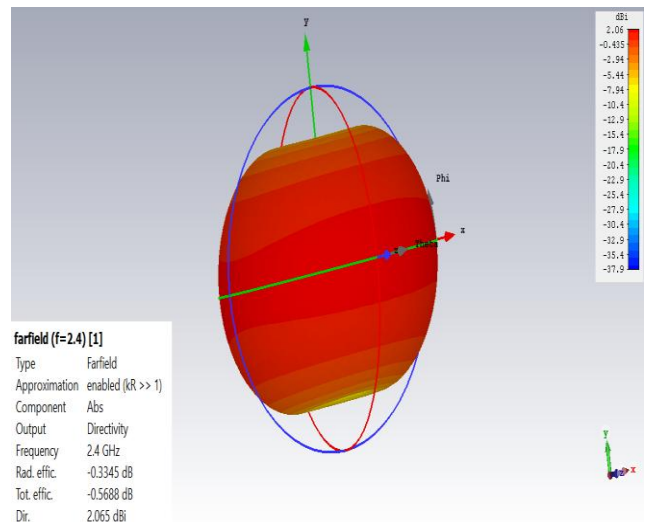


Fig.5: 3D Directivity is 2.065 dB at 2.4 GHz

3. Radiation Pattern

The radiation pattern obtained for the proposed antenna element design shown in fig 6,7 after simulation reflects the radiation pattern at 2.4 GHz frequency.

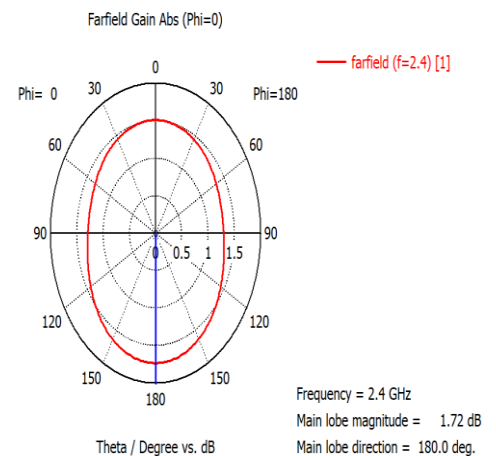


Fig 6: Radiation pattern at 2.4 GHz at 180.0 deg

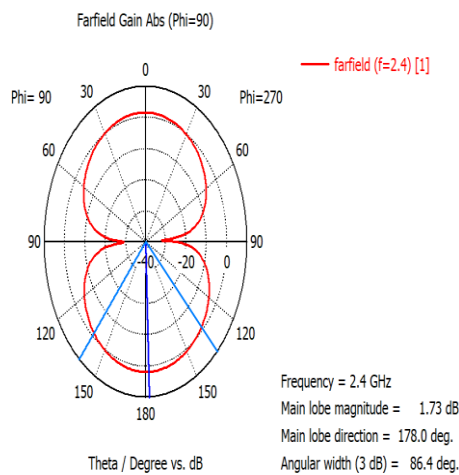


Fig 7: Radiation pattern at 2.4 GHz at 178.0 deg

4. Bandwidth

The bandwidth for the proposed antenna design comes out to be between 2.23 GHz – 2.59 GHz which lies in S band used for application like Wi-Max, WLAN, radio altimeter, cordless phones, wireless headphones.

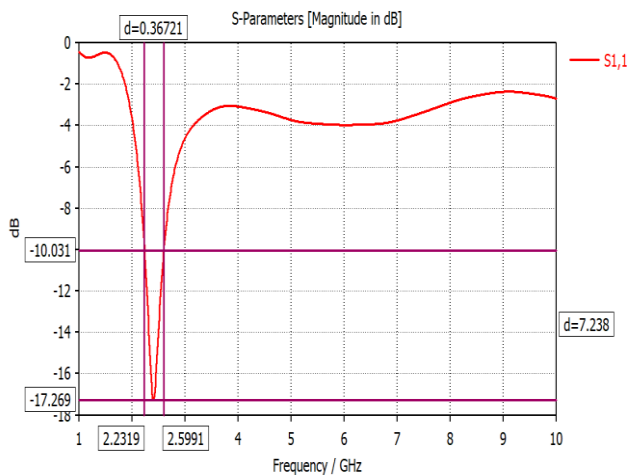


Fig 8 : Bandwidth is 0.36 GHz

IV. CONCLUSION

The designed antenna resonates at 2.4 GHz resonating frequency suitable for S band implementations. Theoretical research is conducted for the proposed circuit antenna. The theory and the findings agree well with modelling and design carried out using Computer Simulation Technology suite software (CST). The proposed antenna with superstrate is relevant to applications for WLAN. The antenna structure suggested have good radiation characteristics with or without superstrate. Since the optical transmission attribute S11 is less than -10 dB value, we may infer that this is very useful in the S band, including Bluetooth, cordless phones, unlocking of car doors without key, and wireless headphones. Specific approaches such as slotting, array and recurring motifs can be used for future improvisation in order to strengthen antenna gain. By using a substratum with higher dielectric constant, the antenna size could be further reduced. However, if the dielectric material such as Rogers/Duroid is used instead of FR4 as that have relatively

low dielectric constant and dielectric loss value, wider bandwidth and even higher gain could also be attained.

REFERENCES

- Kuldeep Galav and M.L. Meena , “ DESIGN AND ANALYSIS OF QUAD BAND ANTENNA FOR WIRELESS SYSTEMS”, KULDEEP GALAV AND M L MEENA: DESIGN AND ANALYSIS OF QUAD BAND ANTENNA FOR WIRELESS SYSTEMS DOI: 10.21917/ijme.2020.0149
- Jonny Dhiman and Sunil Kumar Khah, “Y-Shaped Microstrip Patch Antennas for L and S Band Using Shared Aperture”, Wireless Personal Communications (2020) 111:1–8 <https://doi.org/10.1007/s11277-019-06841-w>
- Gupta, M., Sachdeva, S., Kumar Swamy, N., & Singh, I. P. (2014). Rectangular microstrip patch antenna using air as substrate for S-band communication. *Journal of Electromagnetic Analysis and Applications*, 6(3), 38–41
- Sreeja, T. K., Arun, A., & Jaya Kumari, J. (2012). An S-band micro-strip patch array antenna for nano-satellite applications. In *ICGT international conference* (pp. 325–328), December. ISBN: 978-1-4673-2635-3
- Sinha, S., & Begam, A. (2012). Design of probe feed microstrip patch antenna in S band. *IJECE*, 5(4), 417–423.
- Raj Gusain and Sandip Vijay, Comparative analysis of circularly polarized microstrip antenna with cross slot using single and double substrate, *International Journal of Computer Applications* (0975 – 8887) Volume 98– No.10, July 2014
- Mahender Singh, Radhika, and Priyanka Singh, “Microstrip patch antenna with different polarizations in L-band applications,” *ICCNT-2012*, July 26-28, 2012, Coimbatore, India
- a. Kordzadeh and F. Hojat Kashani, “ A new reduced size microstrip patch antenna with fractal shaped defects,” *Progress In Electromagnetics Research B*, Vol. 11, 29–37, 2009
- Ranjan Mishra, An Overview of Microstrip Antenna, *HCTL Open International Journal of Technology Innovations and Research (IJTIR)*, Volume 21, Issue 2, August 2016.
- Pozar, D. M. and D. H. Schaubert, *Microstrip Antennas: The Analysis and Design of Microstrip Antennas and Arrays*, IEEE Press, New York, 1995
- Amit Kumar Shrivastava, Ranjan Mishra ,Raj Gaurav Mishra, Ramesh Bharti, “Effect of Microstrip Line Dimensions on Bandwidth Enhancement of a Regular Microstrip Antenna”, 3rd International Conference and Workshops on Recent Advances and Innovations in Engineering, 22-25 November 2018
- Samarth Agarwal and Prachi, “High Gain Linear 1×4 X-slotted Microstrip Patch Antenna Array for 5G Mobile Technology”, *journal of telecommunications and Information Technology*, 1/2020
- N. Kaur and S. Malhotra, “A review on significance of design parameters of microstrip patch antennas” in *Proc. 5th In. Conf. on Wirel. Netw. and Embedd. Syst. WECON 2016*, Rajpura, India 2016 (doi: 10.1109/WECON.2016.7993491).
- R. K. Chaurasia, Ranjan Mishra, Raj Gaurav Mishra, Deepak Kumar, Amit Kumar Shrivastava ,“ Numerical Modelling And Solution Of Microstrip Antenna By Using Caup to Time Fraction RDT Method’, *International Journal of Scientific & Technology Research* Volume 8, Issue 08, August 2019 Issn 2277-8616..
- R. Mishra, J. Jayasinghe, R. G. Mishra, P. Kuchhal, “Design and Performance Analysis of a Rectangular Microstrip Line Feed Ultra-Wide Band Antennal”, *International Journal of Signal Processing, Image Processing and Pattern Recognition*, Vol.9, No.6, pp.419- 426, 2016
- RK Chaurasia, Dr Vishal mathur ,“Enhancement of bandwidth for square of micro strip antenna by partial ground and feedline technique”- *Asia Pacific Journal of Engineering Science and Technology* Volume -3.Issue 1 March 2017, Pages 49–53.
- Brajlata Chauhan and Prachi, “Triple Band High Gain Slotted Antenna”, *IEEE India Antenna Week*, 26-30 May 2014
- Ranjan Mishra, Raj Gaurav Mishra, R. K. Chaurasia, Amit Kumar Shrivastava, “Design and Analysis of Microstrip PatchAntenna for Wireless Communication”, *International Journal of Innovative Technology and Exploring Engineering (IJITEE)* ISSN: 2278-3075, Volume-8 Issue-7 May, 2019

AUTHORS PROFILE



Ms Bhavna Sharma is currently pursuing her Mtech ECE from CT university, Ludhiana , India. She is having eight years of teaching experience as an Assistant Professor at Model Institute of Engineering and Technology, Jammu. She done her Bachelor of Engineering From Jammu University. Her research interest area is Microstrip Patch antenna.



Dr. Punam Rani has rich experience of over 20 years. She has published books named Computer System Architecture, Introduction to Microprocessor and Digital Electronics. She emphasizes stress on practical exposure to the students in the field of Engineering and Computer Applications. She has published 14 papers in various National/International Conferences/Journals. She has also organized seminar/workshops/conferences as organizing secretary. Presently 4 Ph.D, 1 M.Phil and 1 M.Tech scholars are doing their research work under her supervision. She has attended many FDP programmes from TTTI Chandigarh, Thapar University, Guru Nanak Dev Engineering College, PTU and many more.



Ms. Prachi, is currently working as an Assistant professor at Model Institute of Engineering and Technology, Jammu. She is having total experience of 4.8 years in reputed Universities. She is currently pursuing her Ph.D. on 5G Antennas from ICFAI University, Dehradun. She earned her Bachelor of engineering in electronics and communication with first division from Jammu University, Jammu & Kashmir and completed her M.Tech with honors in Wireless and Mobile Communication from Uttarakhand Technical University, Uttarakhand, India. She worked as Junior Research Fellow in DST sponsored project at Mody University, Laxmangarh, Rajasthan. She served as Assistant Professor at ICFAI University, Dehradun for 3 yrs. She has published 8 research papers in reputed International and National journals and 5 conference papers. Her research interest includes 5G antennas, Microstrip Patch Antenna Arrays, Electromagnetic field theory, Plasmonics etc.s.