


Assessing the Life Cycle Performance in the Metallurgical Sector: A Case Study in Italy

Vinci Giuliana, Barricella Carlo, Ruggeri Marco



Abstract: This study compared two types of sheets: one made of steel and one made of aluminum, using Life Cycle Assessment (LCA), Life Cycle Costing (LCC), and Social Life Cycle Assessment (S-LCA). The LCA results show that the aluminium sheet had a greater environmental impact than the steel one in 11 out of 18 impact categories, including a 5% higher Global Warming Potential, a 3% higher Stratospheric Ozone Depletion, and a 72% higher Ionising Radiation. The main contributing factors were energy-intensive processes and bauxite processing associated with aluminium production. The LCC results also supported the findings of the LCA, demonstrating that the raw material, electricity, and labour costs for aluminium sheets were higher compared to those for steel, with the aluminium sheets costing €163 and the steel ones costing €19. However, the S-LCA results presented a contrasting perspective. They indicated that steel sheets exhibited poorer social performance compared to aluminium ones, particularly regarding child labour and discrimination, primarily due to the harsh working conditions in Ghana, the primary source of iron used in steel production. Overall, this study highlights the environmental superiority of steel screens over aluminium ones, while also underscoring the social challenges associated with steel production.

Keywords: Aluminium, Life Cycle Thinking, Steel, Sustainability

I. INTRODUCTION

In recent decades, the need for sustainable development has become increasingly evident in many sectors. Among them, the steel and aluminium sectors have gained significant attention due to their substantial contribution to global economies and their environmental and social impacts [1]. From an economic perspective, the steel industry, comprising the aluminium and steel sector, makes a significant contribution to global GDP, as it includes various activities, including mining, refining, smelting, and manufacturing [2], which collectively generate significant economic value and employment opportunities [3]. Therefore, it plays a crucial role in infrastructure development, construction, automotive manufacturing, and other industries, contributing significantly to GDP in many countries and regions of the

world. From an environmental perspective, however, it generates significant impacts as both the aluminium and steel sectors are energy-intensive, accounting for 1% [4] and 7% [5] of global greenhouse gas emissions, respectively. The aluminium industry is estimated to consume about 3-5% of global electricity production [5]. The smelting process is responsible for most of these emissions [6], mainly from fossil fuel consumption and the release of carbon dioxide (CO₂) and perfluorocarbons (PFCs). The primary sources of emissions in the steel sector also include the use of fossil fuels for heating and the reduction of iron ore (resulting in CO₂ emissions) and the production of coke, a carbon-intensive fuel [6]. But this also includes several social impacts associated with steel and aluminium production, mainly related to critical raw materials, i.e., those natural resources are essential for the functioning of specific industries and economies but characterised by high supply risk and economic importance [7]. Or even to the conditions of workers, and the occupational hazards involved in the aluminium and steel industries, primarily as they work with heavy machinery, high temperatures, and potentially hazardous materials [8]. Without adequate safety measures, inadequate training, and insufficient protective equipment, workers can be exposed to risks such as accidents, injuries, respiratory problems, burns, and other occupational hazards [8]. The steel and aluminium sectors, therefore, are integral components of modern economies, but they face significant environmental and social sustainability challenges. Balancing economic importance with sustainability is therefore a key challenge, and the application of tools such as life cycle assessment can help identify opportunities to improve the financial performance of the sectors while minimising their environmental impact. Therefore, in light of this, the objective of this paper is to conduct a sustainability assessment in the aluminium and steel sectors through a life cycle thinking perspective by applying Life Cycle Assessment (LCA) [9-10], Life Cycle Costing [11] and Social Life Cycle Assessment (SLCA) [12]. LCA is a comprehensive methodology that assesses the environmental impacts of a product, process, or system throughout its life cycle, from raw material extraction to end-of-life disposal. LCC and SLCA, on the other hand, extend the assessment to include socio-economic aspects, focusing on the social implications of a product's life cycle stages. An Italian company that produces steel and aluminium screens was chosen as a representative case study for the sustainability assessment, and whose name has been redacted for reasons of Privacy.

Manuscript received on 18 July 2023 | Revised Manuscript received on 04 August 2023 | Manuscript Accepted on 15 August 2023 | Manuscript published on 30 August 2023.

*Correspondence Author(s)

Giuliana Vinci, Department of Management, Sapienza University of (Rome), Italy. E-mail: Giuliana.vinci@uniroma1.it, ORCID ID: [0000-0003-3025-1831](https://orcid.org/0000-0003-3025-1831).

Marco Ruggeri*, Department of Management, Sapienza University of (Rome), Italy. E-mail: m.ruggeri@uniroma1.it, ORCID ID: [0000-0001-6591-0142](https://orcid.org/0000-0001-6591-0142).

Carlo Barricella, Department of Management, Sapienza University of (Rome), Italy. E-mail: carlobarricella@gmail.com

© The Authors. Published by Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP). This is an [open access](https://creativecommons.org/licenses/by-nc-nd/4.0/) article under the CC-BY-NC-ND license <http://creativecommons.org/licenses/by-nc-nd/4.0/>

II. MATERIALS AND METHODS

A. Case study description

A company operating in Campania, Italy, was chosen as a case study, specializing in precision sheet metal and mechanical carpentry, producing for the naval, railroad, aeronautical, and electronics industries. It was founded in 1989 as part of a program to diversify its previous industrial plant construction business to provide its production services to medium to large companies, initially employing only five or six workers, to undertake a remarkable growth over the past decade, going from a workforce of about 15 employees to its current 55 employees, while maintaining its family company structure and evolving in management methods and production systems. The company's production activities were initially located in the Isclero Valley in the province of Benevento, later expanding to include the nearby *Limatola* plant, which spans an area of 18,000 square meters, with 3,500 square meters dedicated to production and offices.

B. Life Cycle Assessment (LCA)

LCA allows the evaluation of a product or service's potential environmental, social, and economic impacts. It is a standardized method based on the ISO 14040:2006 and ISO 14044:2006 and it consists of four stages, as shown in [Figure 1](#): 1) Goal and scope definition; 2) Life Cycle Inventory (LCI); 3) Life Cycle Impact Assessment (LCIA) 4) Interpretation.

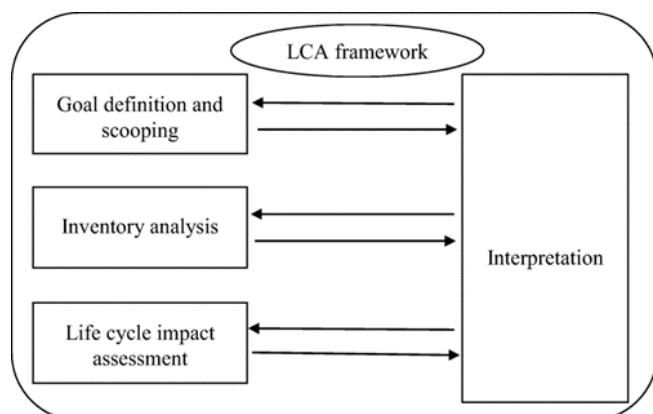


Fig. 1. Life Cycle Assessment Framework

Regarding the goal of the study, it was to provide an LCA of two types of sheet metal (screens), and then compare their impacts and draw assessments. Two materials, in particular, were considered: aluminium and steel, which are among the most widely used metals in manufacturing processes. The production of a 200-unit batch, i.e., packaging for these products, was chosen as the functional unit. For the analysis, the system boundaries were defined to study the impacts from cradle to gate (Figure 2), encompassing the production of raw materials (steel and aluminium), auxiliary materials, processing, packaging, and shipping to Timisoara, Romania.

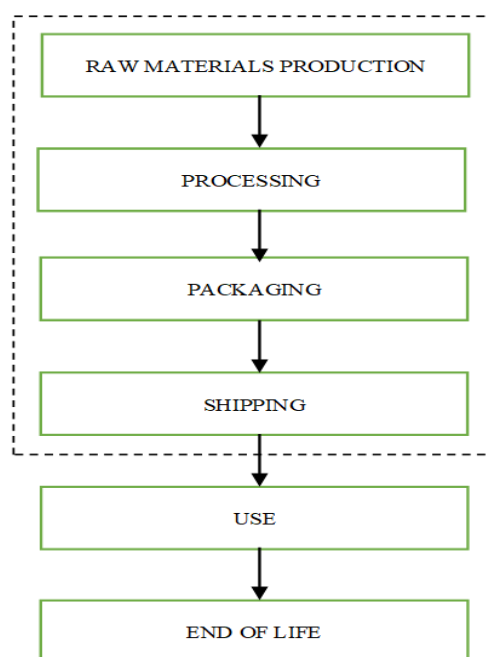


Fig. 2. System boundaries of the processes

Considering the wide variability of applications of the schemes and the multiple configurations they can have during installation, it was decided to exclude the product use phase. Additionally, the end-of-life phase of the product was excluded because the organisation, as a B2B company, has no influence over its management and therefore does not have the related data. The inputs and outputs used in the study are listed in Table I and include raw materials (such as steel and aluminium), ancillary materials (materials used to fulfil specific processes, such as powder coating for painting), and utilities (such as electricity and nitrogen).

Table 1: Life Cycle Inventory

Input	Unit	Steel sheet	Aluminum sheet
Steel AISI 304 BA	kg	19.18	-
Aluminium 5754 H111	kg	-	70.00
Kapton (polyamide film)	kg	0.27	-
Cardboard (boxes)	kg	0.60	1.5
SURTEC (Trivalent Chromium)	cl	-	15.00
Powder coating (epoxy/polyester)	kg	0.003	-
Film (polyolefin)	kg	0.23	0.46
Polyethylene	kg	0.002	0.005
Filling paper	kg	0.42	0.84
Vellum Label	kg	0.001	0.007
Electricity	kWh	1.53	3.24
Nitrogen	m ³ /h	0.16	2.38
Output	Unit	Steel sheet	Aluminum sheet
Scrap	kg	0.96	42.00
Sheet	p	20,000	20,000

As for the LCIA, in this study, we followed the ReCiPe 2016 MidPoint (I). SimaPro 9.5. was used, and the 18 impact categories considered are:

Global Warming Potential (GWP); Stratospheric Ozone Depletion (SOD); Ionizing radiation (IR); Ozone Formation, Human Health (OFHH); Fine Particulate Matter Formation (FPMP); Ozone formation, Terrestrial ecosystems (OFTE); Terrestrial acidification Potential (TAP); Freshwater Eutrophication Potential (FEP); Marine Eutrophication Potential (MEP); Terrestrial Ecotoxicity (TEC); Freshwater Ecotoxicity (FEC); Marine Ecotoxicity (MEC); Human Carcinogenic Toxicity (HCT); Human Non-Carcinogenic Toxicity (HNCT); Land Use (LU); Mineral Resources Scarcity (MRS); Fossil Resources Scarcity (FRS); Water Consumption (WC).

C. Life Cycle Costing (LCC)

Life Cycle Costing (LCC) (ISO 15686-5) is used to calculate the lifecycle cost of a product or service, from pre-production stages to its final disposal, with the aim of minimising production costs. The goal is to achieve better economic sustainability of one's product or service. However, LCC can often be a complex analysis to implement because the necessary data are often sensitive for companies that are reluctant to disclose them. Therefore, some estimates can be made based on data available in the literature or by drawing on public databases of large market analysis companies (e.g., Bloomberg). In this study, in the absence of specific data, some values were estimated by considering the most impactful cost categories in the product life cycle. Specifically, the market prices of aluminium and steel, the price of electricity required for the proper operation of machinery, labour costs, and the cost of labour. In the first category, the market prices of steel (471.28€/ton) and aluminium (2067.23€/ton) were considered [13]. Regarding the price of energy, data provided by the Energy Services Manager was taken as a reference, which is 114.8 €/mWh [14]. Finally, regarding labour costs, the one surveyed by the International Labour Organisation was considered, which in 2022 for the manufacturing sector was €29.20 per hour per employee. Once the data were collected, costs for individual categories were calculated.

D. Social Life Cycle Assessment (S-LCA)

The guidelines of the Product Social Impact Life Cycle Assessment (v3) (PSILCA) [15] were followed. Two stakeholder categories (workers and local community) and eight impact categories (child labour, forced labour, fair wages, working hours, labour rights, discrimination, health and safety, and immigration) were selected for this study. In turn, the eight categories were defined by eight sub-categories, each of which was determined by an indicator chosen based on available data and its relevance across sectors and impact categories. Relative to social performance, we do not speak in this sense of impact, but of risk. This is because, if the information on social effects is not available at the product level, social effects cannot be attributed with certainty, and, therefore, possible risks are considered [16]. It is not possible to know with certainty the social impact of producing a specific good or service. Still, it is sufficient to know the probability that a product is associated with a given externality. Then for each indicator, the results were normalized according to PSILCA guidelines, considering the five risk scales defined by the database: very low risk, low risk, medium risk, high risk, and very high risk.

III. RESULTS AND DISCUSSIONS

A. Life Cycle Assessment

The results of the LCIA are shown in [Table II](#).

Table 2: Life Cycle Impact Assessment of the two processes

Impact categories	Unit	Aluminum sheet	Steel sheet
GWP	kg CO ₂ eq	1,276.8	1,220.5
SOD	kg CFC11 eq	0.0003	0.0002
IR	kBq Co-60 eq	0.761	0.443
OFHH	kg NO _x eq	5.179	6.297
FPMP	kg PM _{2.5} eq	0.265	0.021
OFTE	kg NO _x eq	5.241	6.379
TAP	kg SO ₂ eq	6.201	4.242
FEP	kg P eq	0.011	0.001
MEP	kg N eq	0.005	0.008
TEC	kg 1,4-DCB	195.15	34.48
FEC	kg 1,4-DCB	4.566	5.807
MEC	kg 1,4-DCB	1.932	2.296
HCT	kg 1,4-DCB	0.581	0.573
HNCT	kg 1,4-DCB	57.62	62.51
LU	m ² a crop eq	24.72	11.22
MRS	kg Cu eq	11.18	1.87
FRS	kg oil eq	323.03	367.97
WC	m ³	21.29	0.62

The comparison of the two types of screens reveals that the aluminium screen is more impactful than the steel screen in 11 out of 18 impact categories. For example, the aluminium screen has a GWP of 5% greater, an SOD of 3%, and an IR of 72% greater. Aluminium production involves energy-intensive processes such as bauxite refining and smelting, which can contribute to higher GHG emissions and energy consumption than steel production. This then leads to greater production of gases such as CO₂ and ionising radiation, sometimes resulting from the use of nuclear energy for electricity production [17]. These data are also confirmed by the FPMF, which indicates that the aluminium screen manufacturing process is approximately 12 times higher than for steel. The refining and smelting processes involved in aluminium production are energy-intensive and often use high-temperature operations [18]. These processes can involve the combustion of fossil fuels, which can contribute to particulate emissions, especially if adequate pollution control measures are not in place. Steel production also has its own refining and smelting processes, but particulate emissions may be relatively lower due to differences in operating characteristics and technologies used [19]. Other noteworthy impacts for the aluminium screen manufacturing process are FEP, TEC, LU, MRS, and WC, which are 9, 5.6, 2.2, 6, and 35 times greater, respectively, than those of the steelmaking process. This is because bauxite mining requires land and water because of site exploration and preparation, a process that often involves the use of land for geological surveys, sampling, and analysis [20].

Additionally, large amounts of water are used to break down dust, process the ore, cool equipment, and maintain the site. And finally, after the mining operation is completed, the land must be rehabilitated to mitigate environmental impacts and restore the site, requiring reclamation activities such as revegetation, soil stabilization, and erosion control [20]. In general, LCIA results suggest that the choice between aluminium and steel should be based on a comprehensive assessment of all environmental impacts and economic considerations. For example, if the primary goal is to reduce greenhouse gas emissions, steel sheets may be the most suitable choice. On the other hand, if the primary goal is to minimise dependence on fossil fuels, aluminium sheet metal may be preferable. However, it is essential to note that these results are based on data specific to the manufacturing process of the aluminium and steel sheets used in the study. Environmental impacts may vary depending on the source of raw materials and the production process employed. Therefore, these results should be used as a general guide, but not as a product-specific assessment. Finally, it is essential to note that LCA can provide valuable insights into environmental improvement options for a product. For example, it may be possible to reduce the environmental impact of aluminium or steel sheets by improving the manufacturing process, using renewable energy sources, or reducing water consumption. Taken together, these data suggest that the choice of material has a significant impact on the environmental footprint of the product. However, it is also essential to consider other factors, such as the product's durability, recyclability, reuse potential, and energy efficiency in its use.

B. Life Cycle Costing

Results of LCC are presented in [Table III](#).

Table 3: Life cycle costing results

Categories	Aluminum sheet	Steel sheet
Raw material	144.71€	9.04 €
Electricity	7.18 €	5.22 €
Labor	11.17€	5.16€
Total	163.05€	19.42 €

For the aluminium screen, the raw material cost is €144.71, the electricity price is €7.18, and the labour cost is €11.17, totalling €163.05. For the steel screen, the raw material cost is 9.04€, the electricity price is 5.22€, and the labour cost is 5.16€, for a total of 19.42€. It can be seen that the raw material cost for the aluminium screen is significantly higher than that of the steel screen; however, the costs associated with electricity and labour for the aluminium screen are also substantially higher, resulting in a substantially higher total cost compared to the steel screen. Therefore, the LCC reveals that aluminium production is highly energy-intensive, confirming the results of the LCA, which affects both the environment and the scarcity of raw materials, as well as the production cost.

C. Social Life Cycle Assessment

The social dimension study aimed to provide a comprehensive overview of the potential risks associated with aluminium and steel production throughout the aluminium and steel supply chain. Therefore, four

countries—Australia, Brazil, Ghana, and Italy—were considered based on the origin of the raw materials needed for steel and aluminium production. Specifically, the bauxite from which aluminium oxide (or alumina), a key ingredient in aluminium production, is obtained, comes from deposits located in Brazil and Australia. Iron ore and chromium, both needed for steel production, are sourced from Australia and Ghana, respectively. Italy was considered the country where the transformation and processing of raw materials into finished products takes place. In the case of steel and aluminium production, the mining and manufacturing sectors were considered [15]. The results are expressed in [Table IV](#). Then, for both aluminium and steel, an arithmetic mean was calculated from the various indicators and normalised according to the risk scales defined by the PSILCA guidelines. Therefore, each risk was given a score. Specifically: very low risk = 1; low risk = 2; medium risk = 3; high risk = 4; very high risk = 5. In this way, it was possible to represent the various risks (Figure 3) visually. The results of the S-LCA show that, of the two materials, steel exhibits the worst social performance, although both materials have equal values in various categories. In particular, it emerges that the two categories for which steel has worse values than aluminium are child labour and discrimination. Specifically, relative to child labour, steel shows a very high risk that child exploitation situations may occur, given that in Ghana, thousands of children work in artisanal mines, including iron and coal mining, and on a small scale [21], in dangerous conditions, although both Ghanaian and international law prohibit child labour. Relative to discrimination, however, discrimination involves a difference in wages at the labour level, especially since there is a 73% imbalance between men and women in Ghana. Although significant progress has been made in promoting girls' education in Ghana, disparities in access and completion rates still exist. Factors such as cultural norms, poverty, early marriage, and teenage pregnancy can hinder girls' educational opportunities and contribute to the gender gap in literacy rates and school enrollment. In addition, women in Ghana face difficulties in accessing decent work and achieving economic empowerment [21]. Gender gaps exist in employment rates, wage levels, and representation in leadership positions. Women are more likely to be engaged in informal and vulnerable work that often lacks job security, social protection, and equal pay, such as in the mining sector. Finally, also noteworthy is the workers' rights category, which assesses how liberal and vibrant the union culture is and how much the right to organise freely is guaranteed for those working in the aluminium and steel supply chains. Higher density values have been considered an indicator of better or more liberal associational conditions.



Table 4: Social Life Cycle Assessment Results

Stakeholders	Subcategories	Social indicators	Aluminium			Steel		
			BRA	AUS	ITA	GHA	AUS	ITA
Workers	Child labour	% of children in employment ages 5–14	5%	n.a.	n.a.	20%	n.a.	n.a.
	Forced labour	Cases × 1000 inhabitants	1.79	0.65	2.43	4.84	0.65	2.43
	Fair salary	Sector average wage per month (score)	2.5	5.8	2.9	2	5.8	2.9
	Discrimination	Gender gap (%)	–10%	20%	25%	73%	20%	25%
	Health & Safety	Fatal accident at workplace (Cases x 100,000 employees)	21	n.a.	22.4	n.a.	n.a.	n.a.
	Working time	Risk of improper working hours (Weekly hours of work for employees)	43	43	38	46	43	38
	Workers right	Trade union density (%)	13%	13%	32.5%	19%	14%	32.5%
Local community	Migration	Migrant workers in the mining sector (% of total workers in the industry)	5%	28%	14%	2%	28%	14%

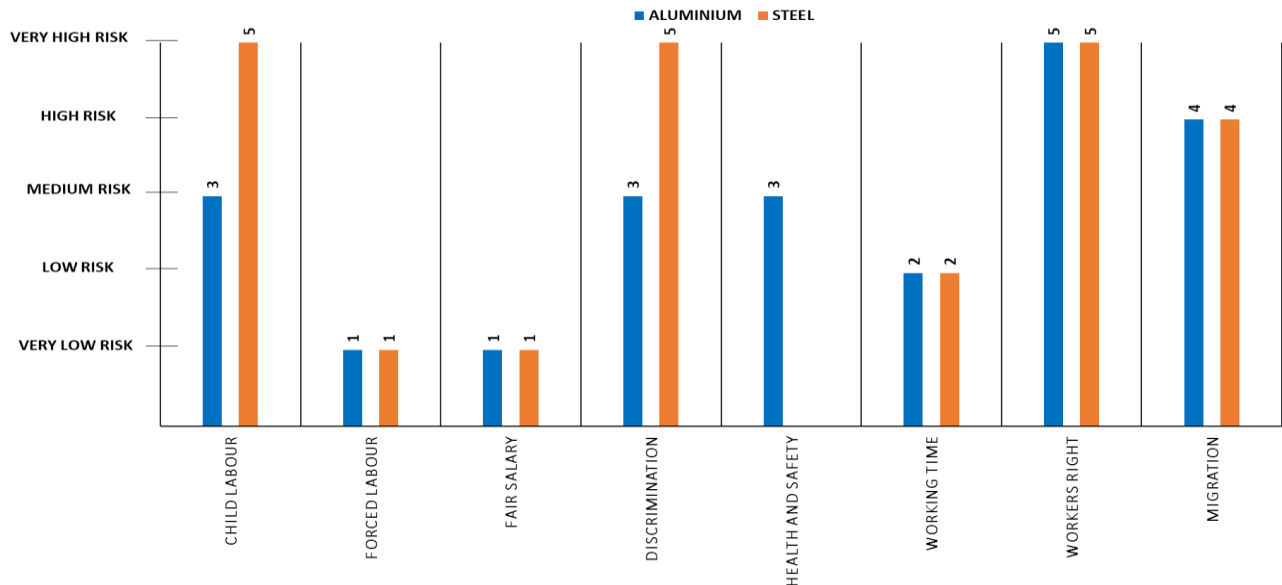


Fig. 3. Social Life Cycle Assessment Results (normalized)

In fact, except for Italy, the remaining countries in the two supply chains exhibit relatively low rates (Table IV) and represent a high risk that workers may not organise in trade unions. However, it is essential to recognise that trade unions operate in a dynamic environment influenced by economic, social, and political factors, and their role and influence can vary across sectors and over time as labour markets evolve and new challenges emerge. Finally, the last particularly noteworthy category is migration, primarily due to the high rate of labour migrants in the mining industry in Australia, where Bauxite and Iron are mined. This could be attributable to two reasons:

1. Temporary Skill Shortage Visas: The Temporary Skill Shortage (TSS) visa is one of the most commonly used skilled migration visas for the mining sector [22]. It allows employers to sponsor foreign workers with specific skills and qualifications for a temporary period to fill labour shortages.
2. Fly-in Fly-out (FIFO) and Drive-in Drive-out (DIDO) workforce: The mining industry in Australia often uses a FIFO or DIDO workforce model [23]. This model involves workers going to remote mining sites for a specified period and then returning to their place of residence. These workers may reside in different regions of Australia or be temporary migrants from overseas.

In this context, however, while the foreign workforce could be seen as an opportunity, the high percentage of foreign

workers, on the other hand, could also induce a high risk of discrimination, racism, and social conflicts due to high immigration, especially related to the possibility of experiencing unequal treatment, prejudice or negative stereotypes due to the cultural background or nationality of workers.

IV. CONCLUSIONS

In this study, two types of sheets, one made of steel and one made of aluminium, were compared and evaluated using LCA, LCC, and S-LCA. The results of the LCA show that the aluminium screen has a more significant impact than the steel screen in 11 out of 18 impact categories, including, for example, a 5% higher GWP, a 3% higher SOD, and a 72% higher IR, primarily due to the energy-intensive processes and bauxite processing. These data are also confirmed in the LCC, which shows that the raw material, electricity, and labour costs for aluminium screens are higher than those for steel screens, leading to a substantial difference in the final price: €163 for aluminium screens versus €19 for steel screens. In contrast, however, the S-LCA results show that of the two materials, the one that shows worse social performance is steel.

Especially for child labour and discrimination, due to the insane working conditions that occur in Ghana, the country where most of the iron is mined.

DECLARATION

Funding/ Grants/ Financial Support	No, we did not receive.
Conflicts of Interest/ Competing Interests	No conflicts of interest to the best of our knowledge.
Ethical Approval and Consent to Participate	No, the article does not require ethical approval or consent to participate, as it presents evidence that is not subject to interpretation.
Availability of Data and Material/ Data Access Statement	Not relevant.
Authors Contributions	All authors have equal participation in this article.

REFERENCES

- Olmez, G. M., Dilek, F. B., Karanfil, T., & Yetis, U. (2016). The environmental impacts of the iron and steel industry: a life cycle assessment study. *Journal of Cleaner Production*, 130, 195–201. <https://doi.org/10.1016/J.CLEPRO.2015.09.139>
- Chen, J., Li, X., Cai, W., Shi, Y., Hui, X., Cai, Z., Jin, W., & Fan, J. (2020). High-efficiency extraction of aluminium from low-grade kaolin via a novel low-temperature activation method for the preparation of poly-aluminium-ferric-sulfate coagulant. *Journal of Cleaner Production*, 257, 120399. <https://doi.org/10.1016/J.CLEPRO.2020.120399>
- Ding, Y., Geng, X., Wang, P., & Chen, W. Q. (2021). How material stocks sustain economic growth: Evidence from provincial steel use in China. *Resources, Conservation and Recycling*, 171, 105635. <https://doi.org/10.1016/J.RESCONREC.2021.105635>
- International Aluminium, 2021. Available online at: <https://international-aluminium.org/statistics/greenhouse-gas-emissions-aluminium-sector/>. Accessed on June 15th, 2023.
- IEA (2020). Iron and Steel Technology Roadmap. IEA, Paris. <https://www.iea.org/reports/iron-and-steel-technology-roadmap>. License: CC BY 4.0
- Kim, J., Sovacool, B. K., Bazilian, M., Griffiths, S., Lee, J., Yang, M., & Lee, J. (2022). Decarbonizing the iron and steel industry: A systematic review of sociotechnical systems, technological innovations, and policy options. *Energy Research & Social Science*, 89, 102565. <https://doi.org/10.1016/J.ERSS.2022.102565>
- Ferro, P., & Bonollo, F. (2019). Materials selection in a critical raw materials perspective. *Materials & Design*, 177, 107848. <https://doi.org/10.1016/J.MATDES.2019.107848>
- Wu, J., Pu, G., Ma, Q., Qi, H., & Wang, R. (2017). Quantitative Environmental Risk Assessment for the Iron and Steel Industrial Symbiosis Network. *Journal of Cleaner Production*, 157, 106–117. <https://doi.org/10.1016/J.CLEPRO.2017.04.094>
- ISO 14040:2006 - Environmental management - Life cycle assessment - Principles and framework.
- ISO 14044:2006 - Environmental management - Life cycle assessment - Requirements and guidelines.
- ISO 15686-5:2017. Buildings and constructed assets — Service life planning — Part 5: Life-cycle costing
- UNEP/SETAC. Guidelines for Social Life Cycle Assessment of Products; UNEP/SETAC: Nairobi, Kenya, 2009; pp. 1–104. ISBN 978-92-807-3021-0. Available online: <https://wedocs.unep.org/bitstream/handle/20.500.11822/7912/-Guidelines%20for%20Social%20Life%20Cycle%20Assessment%20of%20Products-20094102.pdf?sequence=3&isAllowed=1>
- Trading Economics (2023). Available online at: <https://tradingeconomics.com/commodity>. Accessed on June 19th, 2023
- GSE. (2023). Esi Mercato Elettrico. Available on: <https://www.mercatoelettrico.org/It/default.aspx>. Accessed on June 19th, 2023
- Eisfeldt, F.; Ciroth, A. PSILCA—A Product Social Impact Life Cycle Assessment Database. Documentation. 2020. Available online at:

- https://psilca.net/wp-content/uploads/2020/06/PSILCA_documentation_v3.pdf. Accessed on June 26th, 2023.
- Sala, S.; Vasta, A.; Mancini, L.; Dewulf, J.; Rosenbaum, E. Social Life Cycle Assessment: State of the Art and Challenges for Supporting Product Policies; EUR 27624; JRC99101; Publications Office of the European Union: Luxembourg, 2015.
- Rebois, R. V., & Ray, K. (2012). Ionising radiation and radioactive materials in health and disease. *Veterinary Toxicology: Basic and Clinical Principles*, 391–405. <https://doi.org/10.1016/B978-0-12-385926-6.00025-9>
- Artiola, J. F., Walworth, J. L., Musil, S. A., & Crimmins, M. A. (2019). Soil and Land Pollution. *Environmental and Pollution Science*, 219–235. <https://doi.org/10.1016/B978-0-12-814719-1.00014-8>
- Kerry, J. (2012). Aluminium foil packaging. *Packaging Technology*, 163–177. <https://doi.org/10.1533/9780857095701.2.163>
- Schwarz, H.-G. (2004). Aluminium Production and Energy. *Encyclopedia of Energy*, 81–95. <https://doi.org/10.1016/B0-12-176480-X/00372-7>
- Human Rights Watch (2021). I Must Work to Eat. Covid-19, Poverty, and Child labor in Ghana, Nepal, and Uganda. ISBN: 978-1-62313-907-0. Available online at: https://www.hrw.org/sites/default/files/media_2021/05/crd_childlabor0521_web.pdf. Accessed on June 22nd, 2023.
- Australian Government, Department of Home Affairs (2023). Temporary Skill Shortage visa. Available online at: <https://immi.homeaffairs.gov.au/visas/getting-a-visa/visa-listing/temporary-skill-shortage-482>. Accessed on June 22nd, 2023.
- Sanders, D., Willson, G., Susomrith, P., & Dowling, R. (2016). Fly in to work; fly out to Bali: An exploration of Australian fly-in-fly-out (FIFO) workers' leisure travel. *Journal of Hospitality and Tourism Management*, 26, 36–44. <https://doi.org/10.1016/J.JHTM.2015.11.002>

AUTHORS PROFILE



Giuliana Vinci is a full professor of commodity sciences at the Faculty of Economics at the Sapienza University of Rome. She has more than 330 scientific publications in research areas such as Sustainable Development, Life Cycle Assessment (LCA), Social Life Cycle Assessment (S-LCA), Life Cycle Costing (LCC), Food Quality and Food Safety, Food Science Technology, and Environmental Science.



Environmental Science.

Marco Ruggeri is a research fellow at the Faculty of Economics at the Sapienza University of Rome. His scientific production comprises approximately 35 publications on various subject areas, including Life Cycle Assessment (LCA), Social Life Cycle Assessment (SLCA), Life Cycle Costing (LCC), Industry 4.0, food safety, and food quality.



Carlo Barricella is a recent graduate in Economics from the Sapienza University of Rome. In his master's thesis, he highlighted the environmental and socioeconomic impacts of steel and aluminium production.

Disclaimer/Publisher's Note: The statements, opinions and data contained in all publications are solely those of the individual author(s) and contributor(s) and not of the Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP)/ journal and/or the editor(s). The Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP) and/or the editor(s) disclaim responsibility for any injury to people or property resulting from any ideas, methods, instructions or products referred to in the content.

