

Comparative Studies on Performance, Emissions and Combustion Characteristics of Jatropha Oil in Crude Form and Biodiesel in a Medium Grade Low Heat Rejection Diesel Engine

N. Janardhan, M.V.S. Murali Krishna, P.Ushasri, P.V.K. Murthy

Abstract— Experiments were carried out to evaluate the performance of a medium grade LHR diesel engine consisting of air gap insulated piston with 3-mm air gap, with superni (an alloy of nickel) crown and air gap insulated liner with superni insert with different operating conditions of jatropha oil in crude form and biodiesel form with varied injection timing and injection pressure. Performance parameters of brake thermal efficiency (BTE), exhaust gas temperature (EGT) and volumetric efficiency (VE) were determined at various values of brake mean effective pressure (BMEP). Exhaust emissions of smoke and oxides of nitrogen (NO_x) were recorded at different values of BMEP. Combustion characteristics were measured with TDC (top dead centre) encoder, pressure transducer, console and special pressure-crank angle software package. In comparison with CE with diesel operation, biodiesel operation on CE showed compatible performance while LHR engine showed improved performance. The performance of both version of the engine improved with advanced injection timing and higher injection pressure with test fuels. Peak brake thermal efficiency increased by 11%, at peak load operation-brake specific energy consumption decreased by 6%, exhaust gas temperature decreased by 25°C, volumetric efficiency decreased by 5%, smoke levels were compatible and NO_x levels increased by 35% with biodiesel operation on LHR engine at its optimum injection timing (31°bTDC), when compared with pure diesel operation on CE at manufacturer's recommended injection timing (27°bTDC).

Index Terms—Crude Jatropha oil, Biodiesel, CE, LHR engine, Fuel Performance, Exhaust emissions, Combustion characteristics.

I. INTRODUCTION

In the context of fast depletion of fossil fuel as diesel is being used in not only transport sector but also in agriculture sector and increase of pollution levels with these fossil fuels, the search for alternate fuels on has become pertinent for the engine manufacturers, users and researchers involved in the combustion research. Vegetable oils and alcohols are promising substitutes for diesel fuel as they are renewable in nature. Alcohols have low Cetane number and hence engine modification is necessary [1-2] for use as fuel in diesel engine.

Manuscript received on April, 2013.

Prof.N.Janardhan, Mechanical Engineering Department, Chaitanya Bharathi Institute of Technology, Gandipet, Hyderabad, India.

Dr.M.V.S.Murali Krishna, Mechanical Engineering Department, Chaitanya Bharathi Institute of Technology, Gandipet, Hyderabad, India.

Dr.P.Usha Rani, Mechanical Engineering Department, College of Engineering, Osmania University, Hyderabad, India.

Dr.P.V.K.Murthy, Mechanical Engineering Department, Jaya Prakash Narayan Educational Society Group of Institutions, Mahabubnagar Andhra Pradesh, India.


That too, most of the alcohol produced in India, is consumed for Petro-chemical Industries,. On the other hand, vegetable oils have compatible properties compatible to diesel fuel. The idea of using vegetable oil as fuel has been around from the birth of diesel engine. When Rudolf Diesel first invented the diesel engine, about a century ago, he demonstrated the principle by employing peanut oil and hinted that vegetable oil would be the future fuel in diesel engine. Several researchers [3-10] experimented the use of vegetable oils as fuel on conventional engines (CE) and reported that the performance was poor, citing the problems of high viscosity, low volatility and their polyunsaturated character. Higher viscosity and chemical composition of unprocessed oils and fats have been shown to cause problems in a number of areas: (i) piston ring sticking; (ii) injector and combustion chamber deposits; (iii) fuel system deposits; (iv) reduced power; (v) reduced fuel economy and(vi) increased exhaust emissions. The above mentioned problems can be solved once vegetable oils are modified chemically into biodiesel. Bio-diesels derived from vegetable oils present a very promising alternative to diesel fuel since biodiesels have numerous advantages compared to fossil fuels as they are renewable, biodegradable, provide energy security and foreign exchange savings besides addressing environmental concerns and socio-economic issues. These biodiesels have lower viscosity, lower density, lower molecular weight and lower ratio of C/H (C= Number of carbon atoms, H= Number of hydrogen atoms in fuel composition). Experiments were conducted [11-19] with CE with biodiesel and reported that performance was compatible with CE. The drawbacks of the biodiesel and crude vegetable oil for use as fuels in CE call for hot combustion chamber provided by low heat rejection (LHR) diesel engine

The concept of LHR engine is to reduce heat loss to coolant by providing thermal insulation in the path of heat flow to the coolant. LHR engines are classified depending on degree of insulation such as low grade, medium grade and high grade insulated engines. Several methods adopted for achieving low grade LHR engines are using ceramic coatings on piston, liner and cylinder head, while medium grade LHR engines provide air gap in the piston and other components with low-thermal conductivity materials like superni, cast iron and mild steel etc and high grade LHR engine is the combination of low grade and medium grade engines. Though LHR engines with pure diesel operation provided insulation and they improved brake specific fuel consumption (BSFC), peeling of coating was reported by various researchers [20-22] after certain hours of trials.

Regarding medium grade LHR engines, creating an air gap in the piston involved the complications of joining two different metals. Though it was observed [23] effective insulation provided by an air gap, the bolted design employed by them could not provide complete sealing of air in the air gap. It was made a successful attempt [24-25] of screwing the crown made of low thermal conductivity material, nimonic (an alloy of nickel) to the body of the piston, by keeping a gasket, made of nimonic, in between these two parts. However, low degree of insulation provided by these researchers [24-25] was not able to burn high viscous fuels of vegetable oils. Experiments were conducted with medium grade LHR engines which consisted of air gap insulated piston with superni crown and air gap insulated

II. MATERIALS AND METHODS

LHR diesel engine Fig.1 contained a two-part piston; the top crown made of low thermal conductivity material, superni-90 screwed to aluminum body of the piston, providing a 3-mm air gap in between the crown and the body of the piston.

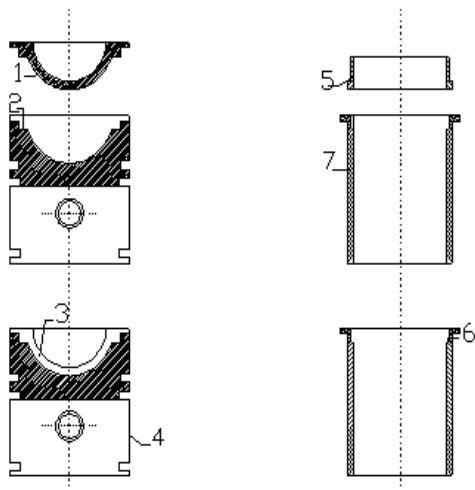

**1.Superni crown with threads, 2 Superni Gasket, 3 Air Gap
4.Body of the piston, 5. Superni insert with threads, 6. Air gap
7. Liner**

Fig.1. Assembly details of air gap piston liner and air gap insulated liner

liner with superni insert with vegetable oils [26-27] and biodiesel [28-29] and reported medium grade LHR engine improved efficiency with alternate fuels.

Little literature was available on comparative studies of Jatropha oil base biodiesel and crude Jatropha oil in medium grade LHR engine with varied engine parameters. The present paper attempted to evaluate the performance of medium grade LHR engine, which contained air gap piston with superni crown and air gap insulated liner with superni insert with different operating conditions of Jatropha oil in crude form and biodiesel form with varied injection pressure and injection timing and compared with CE with pure diesel operation at recommended injection timing and injection pressure.

The optimum thickness of air gap in the air gap piston was found to be 3-mm [24], for improved performance of the engine with diesel as fuel. A superni-90 insert was screwed to the top portion of the liner in such a manner that an air gap of 3-mm was maintained between the insert and the liner body. At 500°C the thermal conductivity of superni-90 and air are 20.92 and 0.057 W/m-K respectively.


The term esterification means conversion of one ester into the other. In the present case glycerol was replaced with methyl alcohol, the fatty acids remaining the same. The chemical conversion reduced viscosity four fold. As it is evident glycerol was the byproduct of the reaction and a valuable commercial commodity. The process of converting the oil into methyl esters was carried out by heating the oil with the methanol in the presence of the catalyst (Sodium hydroxide). In the present case, vegetable oil (crude Jatropha oil) was stirred with methanol at around 60-70°C with 0.5% of NaOH based on weight of the oil, for about 3 hours. At the end of the reaction, excess methanol was removed by distillation and glycerol, which separated out was removed. The methyl esters were treated with dilute acid to neutralize the alkali and then washed to get free of acid, dried and distilled to get pure vegetable oil esters (biodiesel). The properties of test fuels used in the experimentation were shown in Table 1. The crude vegetable oil and biodiesel were heated to a temperature (preheated temperature) till their viscosities were matched to that of diesel fuel. The properties of test fuels were given in Table 1.

Table I. Properties of Test Fuels

Test Fuel	Viscosity at 25°C (centi-Poise)	Density at 25 ° C	Cetane number	Calorific value (kJ/kg)
Diesel	12.5	0.84	55	42000
Crude Jatropha oil (CJO)	125	0.90	45	36000
Biodiesel (EJO)	53	0.87	55	35500

Experimental setup used for the investigations of LHR diesel engine with crude jatropha oil (CJO) operation and biodiesel operation was shown in Fig.2. CE had an

aluminum alloy piston with a bore of 80 mm and a stroke of 110mm. The rated output of the engine is 3.68 kW at a speed of 1500 rpm.

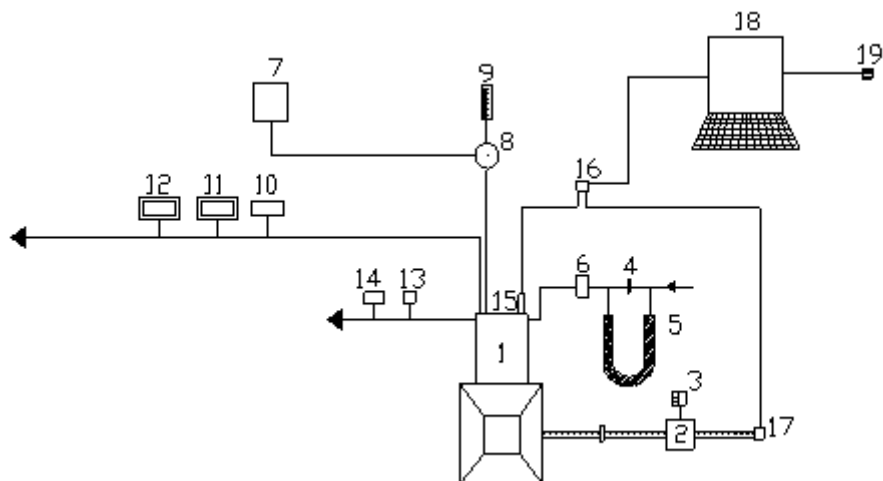

1.Engine, 2.Electical Dynamo meter, 3.Load Box, 4.Orifice meter, 5.U-tube water manometer, 6.Air box, 7.Fuel tank, 8, Pre-heater, 9.Burette, 10. Exhaust gas temperature indicator, 11.AVL Smoke meter, 12.Netel Chromatograph NO_x Analyzer, 13.Outlet jacket water temperature indicator, 14. Outlet-jacket water flow meter, 15.Piezo-electric pressure transducer, 16.Console, 17.TDC encoder, 18.Pentium Personal Computer and 19. Printer.

Fig.2 Experimental Set-up

The compression ratio was 16:1 and manufacturer's recommended injection timing and injection pressures were 27°bTDC and 190 bar respectively. The fuel injector had 3-holes of size 0.25-mm. The combustion chamber consisted of a direct injection type with no special arrangement for swirling motion of air. The engine was connected to electric dynamometer for measuring its brake power. Burette method was used for finding fuel consumption of the engine. Air-consumption of the engine was measured by air-box method. The naturally aspirated engine was provided with water-cooling system in which inlet temperature of water was maintained at 60°C by adjusting the water flow rate. Engine oil was provided with a pressure feed system. No temperature control was incorporated, for measuring the lube oil temperature. Copper shims of suitable size were provided in between the pump body and the engine frame, to vary the injection timing and its effect on the performance of the engine was studied, along with the change of injection pressures from 190 bar to 270 bar (in steps of 40 bar) using nozzle testing device. The maximum injection pressure was restricted to 270 bar due to practical difficulties involved. Exhaust gas temperature (EGT) was measured with thermocouples made of iron and iron-constantan. The exhaust emissions of smoke and NO_x are recorded by AVL smoke meter and Netel Chromatograph NO_x analyzer respectively at different values of BMEP of the engine. Piezo electric transducer, fitted on the cylinder head to measure pressure in the combustion chamber was connected to a console, which in turn was connected to Pentium personal computer. TDC encoder provided at the extended shaft of the dynamometer was connected to the console to measure the crank angle of the engine. A special P-θ software package evaluated the combustion characteristics such as peak pressure (PP), time of occurrence of peak pressure (TOPP), maximum rate of pressure rise (MRPR) and time of occurrence of maximum rate of pressure rise (TOMRPR) from the signals of pressure and crank angle at the peak load operation of the engine. Pressure-crank angle diagram was obtained on the screen of the personal computer. The accuracy of the instrumentation was 0.1%. The various configurations used in the experiment were CE

and LHR engine. The different operating conditions were normal temperature (NT) and pre-heated temperature (PT). The test fuels used in the experimentation were pure diesel, crude Jatropha oil and Jatropha oil based biodiesel.

III. RESULTS AND DISCUSSION

A. Performance Parameters

Curves from Fig.3 indicate that BTE increased up to 80% of the peak load operation with crude jatropha oil operation due to increase of fuel conversion efficiency and beyond that load it decreased due to increase of friction power. CE with crude vegetable oil showed the deterioration in the performance for entire load range when compared with the pure diesel operation on CE at recommended injection timing.

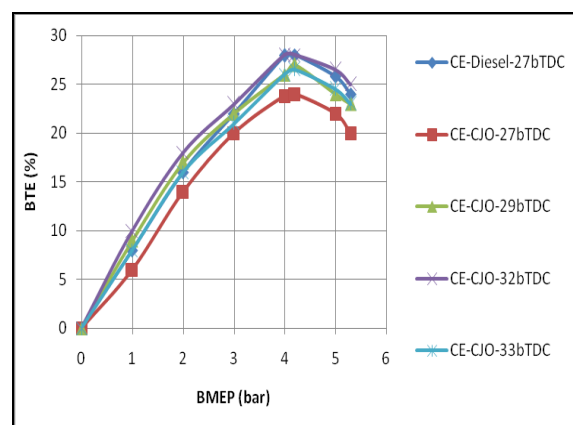


Fig.3 Variation of brake thermal efficiency (BTE) with brake mean effective pressure (BMEP) in CE with CJO operation at an injection pressure of 190 bar.

This was due to high viscous nature of vegetable oil and accumulation of carbon particles on nozzle tip of crude vegetable oil. The result of lower jet exit Reynolds number with vegetable oil adversely affected the atomization.

The amount of air entrained by the fuel spray was reduced, since the fuel spray plume angle was reduced, resulting in slower fuel- air mixing. In addition, less air entrainment by the fuel spray suggested that the fuel spray penetration might increase and resulted in more fuel reaching the combustion chamber walls. Furthermore droplet mean diameters (expressed as Sauter mean) were larger for crude vegetable oil leading to reduce the rate of heat release as compared with diesel fuel. This also, contributed the higher ignition (chemical) delay of the vegetable oil due to lower Cetane number. According to the qualitative image of the combustion under the crude vegetable oil operation with CE, the lower BTE was attributed to the relatively retarded and lower heat release rates. BTE increased with the advancing of the injection timing in CE with the crude vegetable oil at all loads, when compared with CE at the recommended injection timing and pressure. This was due to initiation of combustion at earlier period and efficient combustion with increase of air entrainment in fuel spray giving higher BTE. BTE increased at all loads when the injection timing was advanced to 32°bTDC in the CE at the normal temperature of vegetable oil. The increase of BTE at optimum injection timing over the recommended injection timing with vegetable oil with CE could be attributed to its longer ignition delay and combustion duration. BTE increased at all loads when the injection timing is advanced to 32°bTDC in CE, at the preheated temperature (PT) of CJO also.

Fig.4 indicates that CE with biodiesel showed the compatible performance for entire load range when compared with the pure diesel operation on CE at recommended injection timing. This was due to lower calorific value of the biodiesel. However, when injection timing was advanced, performance improved with biodiesel operation with CE in comparison with pure diesel operation on CE. This was due to initiation of combustion at earlier period and efficient combustion with increase of air entrainment in fuel spray giving higher BTE. BTE increased at all loads when the injection timing was advanced to 33°bTDC in the CE at the normal temperature of biodiesel.

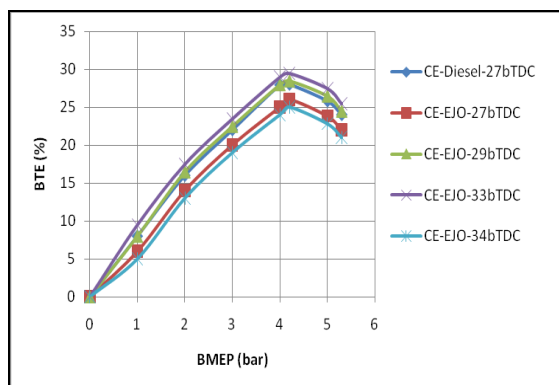


Fig.4 Variation of brake thermal efficiency (BTE) with brake mean effective pressure (BMEP) in CE with biodiesel (EJO) operation at an injection pressure of 190 bar.

From Fig.5 it is observed that LHR version of the engine with crude Jatropha oil operation at recommended injection timing showed the improved performance for the entire load range compared with CE with pure diesel operation.

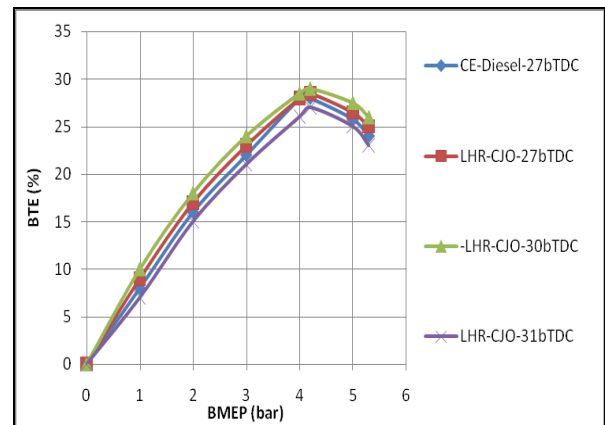


Fig.5 Variation of brake thermal efficiency (BTE) with brake mean effective pressure (BMEP) in LHR engine with crude Jatropha (CJO) operation at an injection pressure of 190 bar.

High cylinder temperatures helped in better evaporation and faster combustion of the fuel injected into the combustion chamber. Reduction of ignition delay of the vegetable oil in the hot environment of the LHR engine improved heat release rates and efficient energy utilization. The optimum injection timing was found to be 30°bTDC with LHR engine with different operating conditions of CJO operation. Since the hot combustion chamber of LHR engine reduced ignition delay and combustion duration and hence the optimum injection timing was obtained earlier with LHR engine when compared with CE with the crude vegetable oil operation.

From Fig.6, it is noticed that similar trends were observed with LHR version of the engine with biodiesel operation as in case of crude vegetable oil operation. Preheating of biodiesel improved performance further in LHR version of the engine. The optimum injection timing was found to be 31°bTDC with LHR engine with normal bio-diesel operation. Since the hot combustion chamber of LHR engine reduced ignition delay and combustion duration and hence the optimum injection timing was obtained earlier with LHR engine when compared with CE with the biodiesel operation.

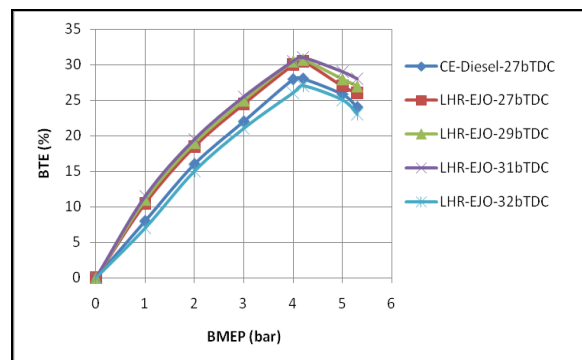


Fig.6 Variation of brake thermal efficiency (BTE) with brake mean effective pressure (BMEP) in LHR engine with biodiesel (EJO) operation at an injection pressure of 190 bar.

Injection pressure is varied from 190 bars to 270 bars to improve the spray characteristics and atomization of the vegetable oils and injection timing is advanced from 27 to 34°bTDC for CE and LHR engine. From Table-2, it is noticed that improvement in BTE at higher injection pressure was due to improved fuel spray characteristics. Peak BTE was higher in LHR engine when compared to CE with different operating conditions of the crude vegetable oil and biodiesel. The performance improved further in both versions of the engine with the preheated test fuels compared with normal test fuels. It was due to improved spray characteristics of the oil, which reduced the impingement of the fuel spray on combustion chamber walls, causing efficient combustion thus improving BTE. However, the optimum injection timing was not varied even at higher injection pressure with LHR engine, unlike the CE. Hence it is concluded that the optimum injection timing was 32°bTDC at 190 bar, 31°bTDC at 230 bar and 30°bTDC at

270 bar for CE with crude vegetable oil. Similar trends were observed with biodiesel operation. The optimum injection timing was 33°bTDC at 190 bar, 32°bTDC at 230 bar and 31°bTDC at 270 bar for CE with biodiesel. However, the optimum injection timing remained same for LHR engine with biodiesel operation irrespective of injection timing. Improvement in the peak BTE was observed with the increase of injection pressure and with advancing of the injection timing with the crude vegetable oil and biodiesel in both versions of the engine. Peak BTE is higher in LHR engine when compared with CE with different operating conditions of the test fuels. Preheating of the vegetable oil improved the performance in both versions of the engine compared with the vegetable oil at normal temperature. Peak BTE was higher with biodiesel operation than crude vegetable oil operation in both versions of the engine at different operating conditions. This was because of efficient combustion of biodiesel with improved cetane rating.

Table II Data of Peak BTE

Injection Timing (° bTDC)	Test Fuel	Peak BTE (%)											
		Conventional Engine						LHR Engine					
		Injection Pressure (Bar)						Injection Pressure (Bar)					
		190		230		270		190		230		270	
NT	PT	NT	PT	NT	PT	NT	PT	NT	PT	NT	PT	NT	PT
27	DF	28	--	29	---	30	--	29	--	30	--	30.5	--
	CJO	24	25	25	26	26	27	28.5	29	29	29.5	29.5	30
	EJO	26	27	27	28	28	29	30.5	31	31	31.5	31.5	32.
30	CJO	26	26.5	26.5	27	28	28.5	29	29.5	29.5	30	30	30.5
31	EJO	--	--	--	--	--	--	31	31.5	31.5	32	32	32.5
32	CJO	28	28.5	27.5	28	27	27.5	--	--	--	--	--	--
33	EJO	29.5	30	29	29.5	28.5	---	--	--	--	--	--	-

DF-Diesel Fuel, CJO- Crude Jatropha Oil, NT- Normal or Room Temperature, PT- Preheat Temperature

From Table 3, it is noticed that brake specific energy consumption (BSEC) at peak load decreased with the increase of injection pressure and with the advancing of the injection timing at different operating conditions of the

vegetable oil and biodiesel in both versions of the engine. This was due to effective energy utilization of the vegetable oil particularly in LHR engine.

Table III. Data of BSEC at peak load operation

Injection Timing (° bTDC)	Test Fuel	BSEC at peak load (kW/kW)											
		Conventional Engine						LHR Engine					
		Injection Pressure (Bar)						Injection Pressure (Bar)					
		190		230		270		190		230		270	
NT	PT	NT	PT	NT	PT	NT	PT	NT	PT	NT	PT	NT	PT
27	DF	4.00	--	3.92	--	3.84	--	4.16	---	4.08	--	4.00	--
	CJO	4.90	4.70	4.70	4.65	4.65	4.60	3.96	3.92	3.92	3.88	3.88	3.84
	EJO	4.70	4.50	4.50	4.45	4.45	4.40	3.80	3.76	3.76	3.72	3.72	3.68
30	CJO	4.90	4.70	4.70	4.65	4.65	4.60	3.96	3.92	3.92	3.88	3.88	3.84
31	EJO	--	--	--	--	--	--	3.76	3.72	3.72	3.68	3.68	3.64
32	CJO	3.98	3.94	3.94	3.90	3.90	3.86	-	--	--	--	--	-
33	EJO	3.8	3.77	3.84	3.80	4.05	4.00	--	-	--	--	--	--

BSEC at peak load operation was lower with biodiesel operation when compared with crude vegetable oil in both versions of the engine at different operating conditions. This was because of improved energy substitution by biodiesel with improved cetane rating.

Fig. 7 indicates that CE with biodiesel operation at the recommended injection timing recorded higher EGT at all loads when compared with CE with pure diesel operation. Lower and retarded heat release rates associated with high

specific energy consumption caused increase in EGT in CE. Ignition delay in the CE with different operating conditions of biodiesel increased the duration of the burning phase. LHR engine recorded lower value of EGT when compared with CE with vegetable oil operation.

This was due to reduction of ignition delay in the hot environment with the provision of the insulation in the LHR engine, which caused the gases expand in the cylinder giving higher work output and lower heat rejection. This showed that the performance improved with LHR engine over CE with biodiesel oil operation.

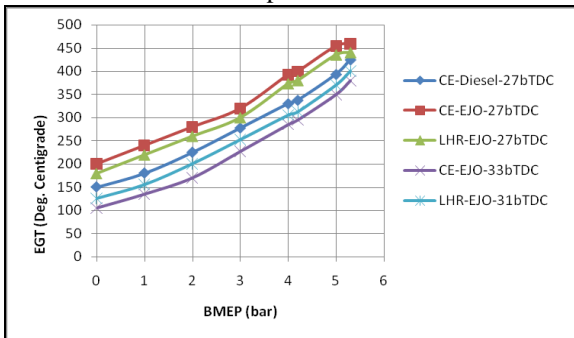


Fig.7 Variation of exhaust gas temperature (EGT) with BMEP in both versions of the engine at recommended and optimized injection timings with biodiesel operation at an injection pressure of 190 bar.

The value of EGT decreased at respective optimum injection timings in both versions of the engine with biodiesel, when compared at recommended injection timing. This confirmed that performance improved at optimum injection timing with both versions of the engine with biodiesel operation. From Table-4, it is evident that the value of EGT decreased with increase of injection pressure and advanced injection timing with both versions of the engine with crude vegetable oil and biodiesel. This was due to improved spray characteristics and air-fuel ratios. Preheating of the test fuels oils reduced EGT marginally when compared to normal vegetable oils in both versions of the engine. Preheating of the test fuels improved spray characteristics of the fuel and thereby air fuel ratios causing lower exhaust gas temperatures.

Table IV . Data of EGT at peak load operation

Injection Timing (° bTDC)	Test Fuel	EGT at the peak load (°C)											
		Conventional Engine						LHR Engine					
		Injection Pressure (Bar)						Injection Pressure (Bar)					
		190		230		270		190		230		270	
		NT	PT	NT	PT	NT	PT	NT	PT	NT	PT	NT	PT
27	DF	425	--	410	---	395	--	475	---	460	--	445	--
	CJO	515	490	490	480	480	455	465	435	435	405	405	380
	EJO	460	440	440	420	420	400	440	420	420	400	400	380
30	CJO	455	435	435	415	415	395	435	405	405	380	380	350
31	EJO	--	--	--	--	--	--	400	380	380	360	360	340
32	CJO	420	400	430	410	440	430	--	--	--	--	--	--
33	EJO	380	360	400	380	420	400	--	-	--	--	--	-

Curves from Fig. 8 indicate that that coolant load (CL) increased with BMEP in both versions of the engine with test fuels. This was because of increasing of gas temperature.

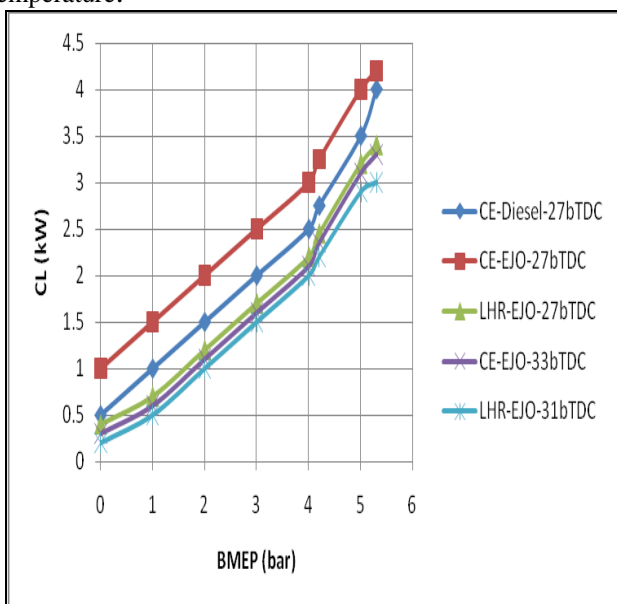


Fig.8 Variation of coolant load (CL) with BMEP in both versions of the engine at recommended and optimized injection timings with biodiesel operation at an injection pressure of 190 bar.

However, CL reduced with LHR version of the engine with biodiesel operation when compared with CE with pure diesel operation. Heat output was properly utilized and hence efficiency increased and heat loss to coolant decreased with effective thermal insulation with LHR engine. However, CL was marginally higher with CE with biodiesel operation in comparison with pure diesel operation on CE. This was due to concentration of fuel at the walls of combustion chamber. CL decreased with advanced injection timing with both versions of the engine with biodiesel operation. This was due to improved air fuel ratios. From Table.5, it is noticed that CL decreased with advanced injection timing and with increase of injection pressure. This was because of improved combustion and proper utilization of heat energy with reduction of gas temperatures. CL decreased with preheated vegetable oils in comparison with normal vegetable oils in both versions of the engine. This was because of improved spray characteristics. CL was observed to be lower with biodiesel operation when compared with crude vegetable oil operation in both versions of the engine at different operating conditions. This was due to elimination of fuel deposits and localized fuel concentration at the walls of combustion chamber with biodiesel operation leading to reduce CL.

Table V. Data of Coolant Load (CL) at peak load operation

Injection Timing (° bTDC)	Test Fuel	Coolant Load (k W)											
		Conventional Engine						LHR Engine					
		Injection Pressure (Bar)						Injection Pressure (Bar)					
		190		230		270		190		230		270	
		NT	PT	NT	PT	NT	PT	NT	PT	NT	PT	NT	PT
27	DF	4.0	---	3.8	--	3.6	---	4.5	---	4.3	--	4.1	---
	CJO	4.4	4.2	4.3	4.0	4.2	3.8	3.6	3.5	3.4	3.3	3.2	3.1
	EJO	4.2	4.0	4.0	3.8	3.8	3.6	3.4	3.2	3.2	3.0	3.0	2.8
30	CJO	4.0	3.8	3.8	3.6	3.6	3.4	3.2	3.0	3.0	2.8	2.8	2.6
31	EJO	--	--	--	--	--	--	3.0	2.8	2.8	2.6	2.6	2.4
32	CJO	3.6	3.4	3.7	3.5	3.8	3.7	--	--	--	--	--	--
33	EJO	3.3	3.2	3.3	3.1	3.2	3.0	--	--	--	--	--	--

Fig.9 indicates that volumetric efficiency (VE) decreased with an increase of BMEP in both versions of the engine with test fuels. This was due to increase of gas temperature with the load. At the recommended injection timing, VE in the both versions of the engine with biodiesel operation decreased at all loads when compared with CE with pure diesel operation. This was due to increase of fuel deposits with biodiesel operation on CE. In case of LHR engine, this was because of increase of temperature of incoming charge in the hot environment created with the provision of insulation, causing reduction in the density and hence the quantity of air with LHR engine. VE increased marginally in CE and LHR engine at optimized injection timings when compared with recommended injection timings with biodiesel operation. This was due to decrease of un-burnt fuel fraction in the cylinder leading to increase in VE in CE and reduction of gas temperatures with LHR engine.

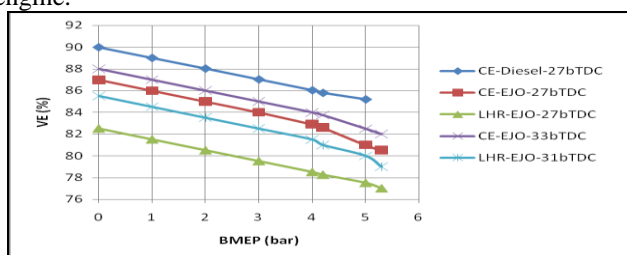


Fig.9 Variation of volumetric efficiency (VE) with BMEP in both versions of the engine at recommended and optimized injection timings with biodiesel operation at an injection pressure of 190 bar.

VE increased marginally with the advancing of the injection timing and with the increase of injection pressure in both versions of the engine, as it was evident from the Table-6. This was due to better fuel spray characteristics and evaporation at higher injection pressures leading to marginal increase of VE. This was also due to the reduction of residual fraction of the fuel and improved combustion with improved air fuel ratios, due to increase of injection pressure. Preheating of the biodiesel and vegetable oil marginally improved VE in both versions of the engine, because of reduction of un-burnt fuel concentration with efficient combustion, when compared with the normal temperature of the oils. VE was observed to be marginally higher with biodiesel operation when compared with crude vegetable oil operation on both versions of the engine at different operating conditions. This was due to clean combustion with biodiesel which improved volumetric efficiency

Table VI. Data of Volumetric Efficiency at peak load operation

Injection Timing (° bTDC)	Test Fuel	Volumetric Efficiency (%)											
		Conventional Engine						LHR Engine					
		Injection Pressure (Bar)						Injection Pressure (Bar)					
		190		230		270		190		230		270	
		NT	PT	NT	PT	NT	PT	NT	PT	NT	PT	NT	PT
27	DF	85	--	86	--	87	--	78	--	80	--	82	--
	CJO	79	80	80	81	81	82	76	77	77	78	78	79
	EJO	80.5	81.5	81.5	82.5	82.5	83	77	78	79.5	80.5	80.5	81.5
30	CJO	79.5	80.5	80.5	81.5	81.5	82.5	78	78.5	79	80	80	81
31	EJO	81.5	82.5	82.5	83	83	84	81	82	82	82.5	82.5	83.5
32	CJO	80.5	81.5	81.5	82.5	82.5	83.5	--	--	--	--	--	--
33	EJO	82	83	83	84	84	85	--	--	--	--	--	--

Hence if any fuel is be tested as an alternate fuel, sound intensity is to be checked with alternate fuels with varied engine conditions.

Fig.10 indicates at recommended injection timing, sound intensity marginally increased in CE with biodiesel operation in



comparison with CE with pure diesel operation. This was due to deterioration in the performance of biodiesel operation on CE.

High viscosity, poor volatility and high duration of combustion caused improper combustion of biodiesel leading to generate high sound levels. LHR engine decreased sound intensity when compared with pure diesel operation on CE. This was because of hot environment in LHR engine improved combustion of CRBO. When injection timings were advanced to optimum, sound intensities were reduced for both versions of the engine, due to early initiation of combustion

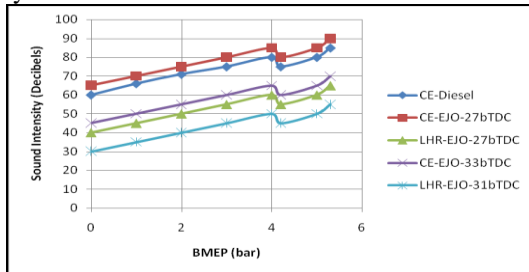


Table VII. Data of sound intensity at peak load operation

Injection timing (°bTDC)	Test Fuel	Sound Intensity (Decibels)											
		CE						LHR Engine					
		Injection Pressure (Bar)						Injection Pressure (Bar)					
		190		230		270		190		230		270	
		NT	PT	NT	PT	NT	PT	NT	PT	NT	PT	NT	PT
27	DF	85		80		95		95		90		85	
	CJO	105	100	100	95	95	90	80	75	75	70	70	65
	EJO	90	85	85	80	80	75	65	60	60	55	55	50
30	CJO	100	95	95	90	90	85	75	70	70	65	65	60
31	EJO	80	75	75	70	70	65	55	50	55	50	55	50
32	CJO	90	85	85	80	90	85	--	-	--	--	--	--
33	EJO	70	65	75	70	75	70	--	-	--	--	--	-

sound intensity decreased with increase of injection pressure for both versions of the engine with the test fuels. This was due to improved spray characteristic of the fuel, with which there was no impingement of the fuel on the walls of the combustion chamber leading to produce efficient combustion.

Preheated biodiesel reduced sound levels as preheated vegetable oils than normal vegetable oils, as viscosity reduced and atomization characteristics of the fuel Improved with preheating. Sound levels were observed to be lower with biodiesel than crude vegetable oil in both versions of the engine at different operating conditions. This was due to efficient combustion with improved cetane rating of biodiesel.

B. Exhaust Emissions

It was reported [30] reported that fuel physical properties such as density and viscosity could have a greater influence on smoke emission than the fuel chemical properties. From Fig.11, it is noticed that smoke levels were lower at low load and drastically higher at loads higher than 80% of the full load operation, as the availability of oxygen was less.

Fig.10 Variation of sound intensity with BMEP in CE and LHR engine at recommend injection timing and optimized injection timings with biodiesel.

Table 7 denotes that the Sound intensity decreased with increase of injection pressure for both versions of the engine with the test fuels. This was due to improved spray characteristic of the fuel, with which there was no impingement of the fuel on the walls of the combustion chamber leading to produce efficient combustion.

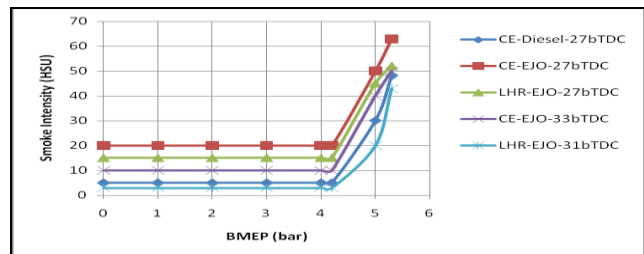


Fig.11 Variation of smoke levels with BMEP in both versions of the engine at recommended and optimized injection timings with CJO operation at an injection pressure of 190 bar.

The value of smoke intensity increased from no load to full load in both versions of the engine. During the first part, the smoke level was more or less constant, as there was always excess air present. However, in the higher load range there was an abrupt rise in smoke levels due to less available oxygen, causing the decrease of air-fuel ratio, leading to incomplete combustion, producing more soot density.



The variation of smoke levels with the BMEP typically showed a U-shaped behavior due to the pre-dominance of hydrocarbons in their composition at light load and of carbon at high load. Drastic increase of smoke levels was observed at the peak load operation in CE at different operating conditions of the vegetable oil, compared with pure diesel operation on CE. This was due to the higher magnitude of the ratio of C/H of CJO (0.83) when compared with pure diesel (0.45). The increase of smoke levels was also due to decrease of air-fuel ratios and VE with vegetable oil compared with pure diesel operation. Smoke levels are related to the density of the fuel. Since vegetable oil has higher density compared to diesel fuels, smoke levels are higher with vegetable oil. However, LHR engine marginally reduced smoke levels due to efficient combustion and less amount of fuel accumulation on the hot combustion chamber walls of the LHR engine at different operating

conditions of the vegetable oil compared with the CE. Density influences the fuel injection system. Decreasing the fuel density tends to increase spray dispersion and spray penetration. Preheating of the vegetable oils reduced smoke levels in both versions of the engine, when compared with normal temperature of the vegetable oil. This is due to i) the reduction of density of the vegetable oils, as density is related to smoke levels, ii) the reduction of the diffusion combustion proportion in CE with the preheated vegetable oil, iii) the reduction of the viscosity of the vegetable oil, with which the fuel spray does not impinge on the combustion chamber walls of lower temperatures rather than it directs into the combustion chamber. Smoke levels decreased at optimized injection timings and with increase of injection pressure, in both versions of the engine, with different operating conditions of the vegetable oil as it is noticed from Table 8.

Table VIII. Data of smoke levels in Hartridge Smoke Units (HSU) at peak load operation

Injection timing (°bTDC)	Test Fuel	Smoke intensity (HSU)											
		Conventional Engine						LHR Engine					
		Injection Pressure (Bar)						Injection Pressure (Bar)					
		190		230		270		190		230		270	
		NT	PT	NT	PT	NT	PT	NT	PT	NT	PT	NT	PT
27	DF	48	--	38	--	34	--	55	--	50	--	45	--
	CJO	68	63	63	58	58	54	63	58	58	53	53	48
	EJO	63	60	61	58	58	54	52	45	45	40	40	35
30	CJO	64	61	61	58	58	55	46	44	44	42	42	40
31	EJO	55	50	50	45	50	45	40	35	30	25	25	20
32	CJO	58	55	55	52	52	49	--	--	--	--	--	--
33	EJO	50	45	55	50	52	48	--	--	--	--	--	-

This is due to improvement in the fuel spray characteristics at higher injection pressures and increase of air entrainment, at the advanced injection timings, causing lower smoke levels.

Temperature and availability of oxygen are two factors responsible for formation of NOx levels. Fig. 12 indicates that NOx levels were lower in CE while they are higher in LHR engine at peak load when compared with diesel operation. This was due to lower heat release rate because of high duration of combustion causing lower gas temperatures with the vegetable oil operation on CE, which reduced NOx levels. Increase of combustion temperatures with the faster combustion and improved heat release rates in LHR engine cause higher NOx levels. At respective optimized injection timing, NOx levels increased in CE while they decreased in LHR engine. This is due to increase of residence time with CE and decrease of combustion temperatures with improvement of air fuel ratios with LHR engine. NOx levels increased with the advancing of the injection timing in CE with different operating conditions of vegetable oil as it is noticed from Table-9. This was due to increase of residence time, when the injection timing was advanced with the vegetable oil operation, which caused higher NOx levels. With the increase of injection pressure, fuel droplets penetrate and find oxygen counterpart easily. Turbulence of the fuel spray increased the spread of the droplets thus

leading to decrease NOx levels. However, decrease of NOx levels was observed in LHR engine, due to decrease of combustion temperatures, when the injection timing was advanced and with increase of injection pressure. As expected, preheating of the vegetable oil further decreased NOx levels in both versions of the engine when compared with the normal vegetable oil. This was due to improved air fuel ratios with which combustion temperatures decreased leading to decrease NOx emissions.

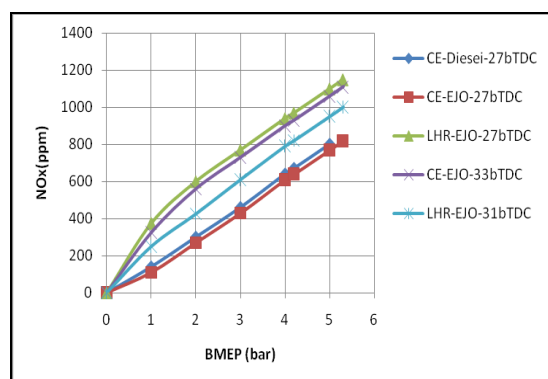


Fig.12 Variation of NOx levels with BMEP in both versions of the engine at recommended and optimized injection timings with biodiesel operation at an injection pressure of 190 bar.

Table IX.. Data of NOx Levels at peak load operation

Injection timing (° b TDC)	Test Fuel	NOx levels (ppm)											
		Conventional Engine						LHR Engine					
		Injection Pressure (Bar)						Injection Pressure (Bar)					
		190		230		270		190		230		270	
		NT	PT	NT	PT	NT	PT	NT	PT	NT	PT	NT	PT
27	DF	850	----	890	----	930	---	1300	--	1280	--	1260	--
	CJO	700	680	680	660	660	640	1245	1230	1230	1210	1180	1115
	EJO	820	770	770	720	720	670	1200	1150	1150	1100	1100	1050
30	CJO	750	720	720	690	690	660	1170	1150	1150	1120	1120	1100
31	EJO	970	920	920	870	870	820	1100	1000	950	900	900	850
32	CJO	950	920	920	890	890	860	--	--	--	--	--	--
33	EJO	1110	1060	1060	1010	1010	960	--	--	--	--	--	--

DF-Diesel Fuel, CJO- Crude Jatropha Oil, NT- Normal or Room Temperature, PT- Preheat Temperature

C. Combustion Characteristics

From Table 10, it is observed that peak pressures are lower in CE while they were higher in LHR engine at the recommended injection timing and pressure with crude vegetable oil, when compared with pure diesel operation on CE. This is due to increase of ignition delay, as vegetable oil require large duration of combustion. Mean while the piston started making downward motion thus increasing volume when the combustion takes place in CE. LHR engine increased the mass-burning rate of the fuel in the hot environment leading to produce higher peak pressures. The advantage of using LHR engine for vegetable oil is obvious as it could burn low cetane and high viscous fuels. Peak pressures increased with the increase of injection pressure and with the advancing of the injection timing in both versions of the engine, with the vegetable oil operation. Higher injection pressure produces smaller fuel particles with low surface to volume ratio, giving rise to higher PP. With the advancing of the injection timing to the optimum value with the CE, more amount of the fuel accumulated in the combustion chamber due to increase of ignition delay as the fuel spray found the air at lower pressure and temperature in the combustion chamber. When the fuel- air mixture burns, it produces more combustion temperatures and pressures due to increase of the mass of the fuel. With LHR engine, peak pressures increased due to effective utilization of the charge with the advancing of the injection timing to the optimum value. The value of TOPP decreased

with the advancing of the injection timing and with increase of injection pressure in both versions of the engine, at different operating conditions of vegetable oil. TOPP was more with different operating conditions of vegetable oil in CE, when compared with pure diesel operation on CE. This is due to higher ignition delay with the vegetable oil when compared with pure diesel fuel. This once again established the fact by observing lower peak pressures and higher TOPP, that CE with vegetable oil operation showed the deterioration in the performance when compared with pure diesel operation on CE. Preheating of the vegetable oil showed lower TOPP, compared with vegetable oil at normal temperature. This once again confirmed by observing the lower TOPP and higher PP, the performance of the both versions of the engine improved with the preheated vegetable oil compared with the normal vegetable oil. This trend of increase of MRPR and decrease of TOMRPR indicated better and faster energy substitution and utilization by vegetable oil, which could replace 100% diesel fuel. Similar trend were observed with biodiesel operation. That too, biodiesel operation produced higher PP, MRPR and lower TOPP in comparison with crude vegetable oil in both versions of the engine at different operating conditions. This was because of high cetane value of the fuel which improved combustion. All combustion characters were within the limits with crude vegetable oil and biodiesel hence these alternate fuels could be effectively substituted 100% for diesel fuel.

Table X. Data of PP, TOPP, MRPR and TOMRPR at peak load operation

Injection timing (°bTDC)/ Test fuel	Engine version	PP(bar)				MRPR (Bar/deg)				TOPP (Deg)				TOMRPR (Deg)			
		Injection pressure (Bar)				Injection pressure (Bar)				Injection pressure (Bar)				Injection pressure (Bar)			
		190		270		190		270		190		270		190		270	
		NT	PT	NT	PT	NT	PT	NT	PT	NT	PT	NT	PT	NT	PT	NT	PT
		27/Diesel	CE	50.4	--	53.5	---	3.1	---	3.4	--	9	-	8	--	0	0
LHR	48.1		--	53	--	2.9	--	3.1	--	10	--	9	--	0	0	0	0
27/CJO	CE	46.9	47.7	49.9	50.3	2.4	2.5	2.9	3	11	10	11	10	1	1	1	1
	LHR	59.5	60.9	63.6	64.5	3.3	3.4	3.5	3.6	10	9	9	8	1	1	1	1
30/CJO	LHR	61.5	61.9	66.3	67.1	3.4	3.5	3.6	3.7	9	8	8	7	0	0	0	0
31/EJO	LHR	65.8	66.5	67.8	68.6	3.7	3.9	3.9	4.1	8	8	8	8	0	0	0	0
32/CJO	CE	51.5	52.8	53.5	54.5	3.3	3.4	3.4	3.5	8	8	8	8	0	0	0	0
33/EJO	LHR	51.8	53.1	54.5	55.6	3.3	3.5	3.4	3.6	8	8	8	8	0	0	0	0



IV. CONCLUSIONS

The optimum injection timing was found to be 32°bTDC with CE while it was 30°bTDC for LHR engine with vegetable oil (CJO) operation. At recommended injection timing, peak brake thermal efficiency increased by 2%, exhaust gas temperature increased by 40°C, volumetric efficiency decreased by 10%, BSEC at peak load operation decreased by 1%, coolant load decreased by 10%, smoke levels increased by 31%, and NOx levels increased by 46% with LHR engine with crude Jatropha oil in comparison with CE with pure diesel operation. Also, peak pressure, MRPR increased and TOPP decreased with LHR engine with CJO operation in comparison with pure diesel operation on CE. Preheated vegetable oil and biodiesel improved the performance when compared with normal vegetable oils in both versions of the engine. Performance improved with advanced injection timing and with increase of injection pressure with both versions of the engine at different operating conditions of the vegetable oils.

ACKNOWLEDGMENTS

Authors thank authorities of Chaitanya Bharathi Institute of Technology, Hyderabad for providing facilities for carrying out research work. Financial assistance provided by All India Council for Technical Education (AICTE), New Delhi, is greatly acknowledged.

REFERENCES

- Murali Krishna, M.V.S., Naga Sarada,S., Sudha Rani,G., Kalyani Radha, K.and Seshagiri Rao, V.V.R. "A comparative study on exhaust emissions of a low heat rejection diesel engine with two different levels of insulation with carbureted methanol and crude pongamia oil", *Pollution Research*, vol.28 (1), 2009, pp.93-96.
- Seshagiri Rao, V.V.R., Murali Krishna, M.V.S., Kishen Kumar Reddy, T and P.V.K. Murthy., "Performance evaluation of a high grade low heat rejection diesel engine with carbureted alcohol and crude Jatropha oil", *International Journal of Renewable Energy Research, (Turkey)*, vol. 2(1), , 2012, pp.516-527.
- Cummins, C. Lyle, Jr., "Diesel's Engine, Volume 1: From Conception To 1918", Wilsonville, OR, USA: Carnot Press, ISBN 978-0-917308-03-1, 1993.
- Devan, P.K. and Mahalakshmi, N.V. "Performance, emission and combustion characteristics of poor oil and its blends in a DI diesel engine", *Fuel*, vol.88, 2009, pp.861-870.
- Acharya, S.K., Swain,R.K. and Mohanti, M.K., "The use of rice bran oil as a fuel for a small horse-power diesel engine. Energy Sources, Part A: Recovery", *Utilization, and Environmental Effects*, vol.33 (1), 2009, pp. 80-88.
- Venkanna, B.K., Venkataramana Reddy,C., Swati B. and Wadawadagi. "Performance, emission and combustion characteristics of direct injection diesel engine running on rice bran oil / diesel fuel blend", *International Journal of Chemical and Biological Engineering*, vol.2(3), 2009, pp.131-137.
- Canaker, M., Ozsezen, A.N. and Turkan, A. "Combustion analysis of preheated crude sunflower oil in an IDI diesel engine", *Biomass Bio-energy*, vol.33, 2009, pp.760-770.
- Venkanna, B.K. and Venkatarama Reddy,C., "Performance, emission and combustion characteristics of DI diesel engine running on blends of honne oil/diesel fuel/kerosene", *International Journal of Agriculture and Biology Engineering*, vol.4 (3), 2009, pp.1-10.
- Misra, R.D., Murthy, M.S."Straight vegetable oils usage in a compression ignition engine—A review", *Renewable and Sustainable Energy Reviews*, vol. 14, 2010, pp.3005–3013.
- Hanbey Hazar and Huseyin Aydin. "Performance and emission evaluation of a CI engine fueled with preheated raw rapeseed oil (RRO)-diesel blends", *Applied Energy*, vol. 87, 2010, pp.786790.
- Jiafeng, S., Jerald, A.C., and Timothy, J.J. "Oxides of nitrogen emissions from biodiesel-fuelled diesel engines", *Progress in Energy and Combustion Science*, vol. 6, 2010, pp.677-695.
- Venkatramn., Devaradjane, G. "Experimental investigation of performance and emission characteristics of diesel-pungam oil,

- methyl esters diesel blends fueled DI engine at optimum engine operating parameters", *International Journal of Green energy and env*, vol.1, 2010, Pp.7-12.
- Venkata Subbaiah, G., Raja Gopal, K., Syed Altaf Hussain, Durga Prasad, B. and Tirupathi Reddy, K. "Rice brawn oil biodiesel as an additive in diesel-ethanol blends for diesel engines", *International Journal of Research and Reviews in Applied Sciences*, vol.3 (3), 2010, pp.33-39.
- Rambabu Kantipudi, Appa Rao, B.V., Hari Babu.N and Satyanarayana,Ch. "Studies on DI diesel engine fueled with rice brawn methyl ester injection and ethanol carburetion", *International Journal of Applied Engineering Research*, Dindigul, vol.1(1), 2010, pp.61-67.
- Rasim, B. "Performance and emission study of waste anchovy fish biodiesel in a diesel engine", *Fuel Processing Technology*, vol.92, 2011, pp.1187-1194.
- Jaichandar, S. and Annamalai, K. "The status of biodiesel as an alternative fuel for diesel engine- An Overview", *Journal of Sustainable Energy & Environment*, vol.2, 2011, pp.71-75
- Ridvan Arslan. "Emission characteristics of a diesel engine using waste cooking oil as a bio-diesel fuel", *African Journal of Bio-Technology*, 2011, pp.3790-3794.
- Xue, J., Grift, T.E., Hansen, A.C. "Effect of biodiesel on engine performances and emissions", *Renewable and Sustainable Energy Reviews*, vol.15, 2011, pp.1098–1116.
- [19] McCarthy, P., Rasul, M.G., Moazzem, S. "Analysis and comparison of performance and emissions of an internal combustion engine fuelled with petroleum diesel and different bio-diesels", *Fuel*, vol.90, 2011, pp.2147–2157.
- Parlak, A., Yasar, H., Idogan O. "The effect of thermal barrier coating on a turbocharged Diesel engine performance and exergy potential of the exhaust gas", *Energy Conversion and Management*, vol. 46(3), 2005, pp.489–499.
- Ekrem, B., Tahsin, E., Muhammet, C. "Effects of thermal barrier coating on gas emissions and performance of a LHR engine with different injection timings and valve adjustments", *Journal of Energy Conversion and Management*, vol. 47, 2006, pp.1298-1310.
- Ciniviz, M., Hasimoglu, C., Sahin, F., Salman, M. S. "Impact of thermal barrier coating application on the performance and emissions of a turbocharged diesel engine", *Proceedings of The Institution of Mechanical Engineers Part D-Journal of Automobile Eng*, vol.222 (D12), 2008, pp.2447–2455.
- Parker, D.A. and Dennison, G.M. "The development of an air gap insulated piston", SAE Paper No. 870652, 1987.
- Ramamohan, K. "Studies on air gap insulated piston engine with pure diesel. Ph.D Thesis", Kakatiya University, Warangal, 1995.
- Rama Mohan, K., Vara Prasad, C.M., Murali Krishna, M.V.S, " Performance of a low heat rejection diesel engine with air gap insulated piston", *ASME Journal of Engineering for Gas Turbines and Power*, vol.121(3), 1999, pp.530-540.
- Vara Prasad, C.M, Murali Krishna, M.V.S., Prabhakar Reddy, C. and Rama Mohan, K. "Performance evaluation of non edible vegetable oils as substitute fuels in low heat rejection diesel engine", Institute of Engineers (London), 214(2), Part-D, Journal of Automobile Engineering, 2000.
- Chennakesava Reddy, Murali Krishna, M.V.S., Murthy, P.V.K., and Ratna Reddy,T. "Potential of low heat rejection diesel engine with crude pongamia oil", *International Journal of Modern Engineering Research (IJMER)*, vol.1 (1), 2011, pp210-224.
- Janardhan, N., Murali Krishna, M.V.S., Ushasri, P. and Murthy, P.V.K. "Potential of a medium low heat rejection diesel engine with crude Jatropha oil", *International Journal of Automotive Engineering and Technologies*, vol.1 (2), 2012, pp.1-16.
- [29] Ratna Reddy, T., Murali Krishna, M.V.S., Kesava Reddy, Ch. and Murthy, P.V.K., "Performance evaluation of a medium grade low heat rejection diesel engine with mohr oil", *International Journal of Recent Advances in Mechanical Engineering (IJMECH)*, (Australia) vol.1 (1), May 2012, pp.1-17.