

CO₂ Sequestration and Treatment of Municipal Sewage by Micro Algae

M. Velan, R. Saravanane

Abstract— Treatment of wastewater by algae is receiving an ever increasing attention in the field of biofuel production, and carbon dioxide sequestration. In this study five genera's namely *Anabaena*, *Diatoms*, *Spirogyra*, *Hyalophacus*, *Monoraphidium*, were tested for its ability to reduce the organic and inorganic pollutants present in the wastewater, growth studies is carried out in a batch system with a working volume of 7- 10 litres. The growth of microalgae were analysed throughout the growth period for about 107 days and it is found that changes were taken place in certain parameters viz., biomass, Nitrogen and phosphate assimilations and CO₂ reduction

Index Terms— CO₂ Sequestration, Micro algae, sewage, biomass .

I. INTRODUCTION

The demand for clean water is currently a worldwide priority. Currently, the main challenge of a wastewater treatment plant (WWTP) is not only to produce reusable clean water, but it is also to find resources for supporting those new developments. The current global investment in water management is about €150 billion per year, of which 95% is public capital (Krozer et al., 2010). Microalgae represent an exceptionally diverse, but highly specialized, group of microorganisms adapted to various ecological habitats (Richmond, 2004; Abou-Shanab et al., 2011a, 2011b) Wastewater derived from municipal, agricultural & industrial activities is a source of nutrients for microalgae cultivation [Lardon et al., 2009]. In addition, microalgae-based systems can significantly reduce both organic matter and nutrients in municipal and piggery wastewater at minimal energy cost [Gonzalez et al., 2008, Mulbry et al., 2008, Zhou et al, 2012]. The use of wastewater could reduce the need for additional Nitrogen & phosphorus sources by approximately 55% [Yang et al., 2011]. Microalgae cultures offer an effective solution to tertiary & quaternary wastewater treatment due to the ability of microalgae to use inorganic nitrogen & phosphorus for their growth [Kumar et al., 2010]. One promising way to make algal biofuel production more cost effective is to integrate wastewater treatment with algal biomass production [Clarens et al., 2010]. This study focuses on the potential for using microalgae isolated from waste stabilization ponds in order to reduce the organic & inorganic pollutants from municipal wastewater..

Manuscript received on April, 2013.

Dr. M. Velan, Chief Manager, Corporate Environment Cell (CEC), Neyveli Lignite Corporation Ltd., (NLC), Neyveli – 607801. Tamilnadu, India.

Dr. R. Saravanane, Associate Professor, Environmental Engineering Division, Department of Civil Engineering, Pondicherry Engineering College, Pondicherry, India.

II. METHODS AND MATERIALS

A. Municipal Wastewater collection

The domestic wastewater is collected from the nearby sewage treatment Plant at the inlet point. The collected wastewater is taken to laboratory and maintained at room condition.

B. Algal Strain Details

The algal inoculum is collected from nearby waste stabilization ponds. The collected sample is maintained at room temperature. Then the algae are microscopically viewed for identification.

C. Experimental Design

The Microalgae were inoculated at different dilution rates such as 20%, 16%, 12%, 10%, 08% ($v_{inoculation}/v_{Domestic\ wastewater}$). The different dilution ratios are given in table 1. The experiment is carried out in a batch process of 10 litre capacity rectangular tank with a working volume of 7 litres. The cultures were incubated at 26±2°C and illuminated with natural sunlight.

Table 1: The different dilution ratios

Batch reactor	Raw municipal wastewater (%)	Microalgae inoculum (%)
01	90	20
02	84	16
03	88	12
04	90	10
05	92	08
CONTROL	-	100

D. Microalgae growth Analysis

The Analyses of Microalgal growth parameters such as pH, Electrical Conductivity, Chemical Oxygen Demand, Dissolved Oxygen, Phosphorus, Total Kjeldhal Nitrogen, Total Dissolved Solids, Salinity, and Total Volatile Suspended Solids were measured as per the procedure given in standard methods for water and wastewater analysis, 2005 21st edition.

III. RESULTS AND DISCUSSION

A. Physiochemical characteristics of Municipal sewage and Algal Inoculum

The physicochemical parameters were analysed for municipal wastewater and microalgal inoculum and presented in Table 2.



Table 2: Average characteristics of Municipal sewage & Microalgal Inoculum

Sl.no	Parameters	unit	municipal sewage (Av.values)	Microalgal inoculum (av.values)
01	Color	-	Grayish Black	Light Green
02	pH	-	6.98	8.62
03	EC	mS	0.248	0.162
06	BOD _{3,27c}	mg/L	270	240
07	COD	mg/L	430	400
13	Phosphorus	mg/L	41	62
14	Ammonia Nitrogen	mg/L	12	23
16	TKN	mg/L	98	65
17	Total Solids	mg/L	6000	6000
18	TDS	mg/L	4000	4000
19	TSS	mg/L	200	2000
20	TVS	mg/L	4000	4000

B. Algae Strain Identification:

The algae inoculum collected from the waste stabilization pond is identified, and the prominent genera found in the sample are Anabaena, Diatoms, Hyalophacus Monoraphidium, Spirogyra.

C. Microalgal growth parameters

pH : Changes in pH values of the algal cultures were ranged between 7.06 and 8.67 (Fig: 01) Variation in pH can affect metabolism and growth of algae in a number of ways, including altering the equilibrium of inorganic carbon (C) species, changing availability of nutrients, and, at extremes, directly affecting cell physiology. The pH range for most cultured algal species is between 7 and 9, with the optimum range being 8.2-8.7.

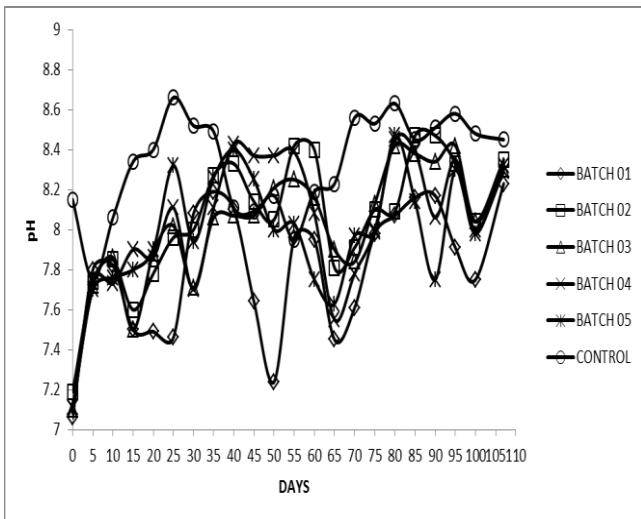


Fig 1: Changes of pH values of different batch cultures during the treatment period

Phosphorus: Phosphorus values were varied between 63 mg/L to 03 mg/L. The removal of phosphorus, from Municipal wastewater by microalgae cultivation as a function of incubation time are shown in Fig:2. After 107 days of algal cultivation, the total phosphorus content were reduced from 55 mg/L to 10 mg/L, 63 mg/L to 08 mg/L, 60 mg/L to 08 mg/L, 61 mg/L to 01 mg/L, 46 mg/L to 06 mg/L, 44 mg/L to

06 mg/L and their removal efficiency were around 82%, 87%, 87%, 84%, 86%, 86%. For the Respective Batch Cultures (01,02,03,04,05, CONTROL).

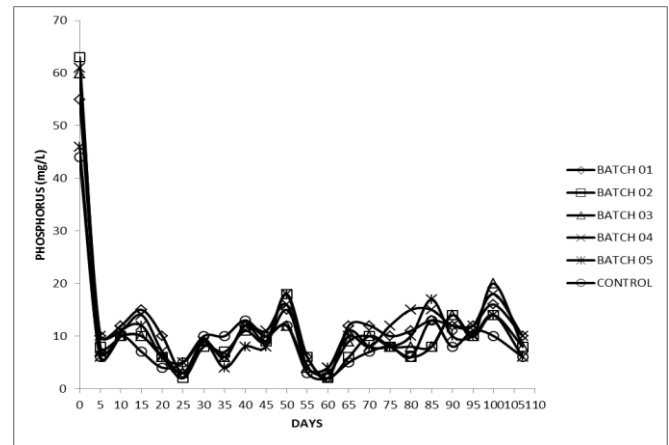


Fig 2 Changes of Phosphorus values of different batch cultures during the treatment period

Wang & Lan.,2011, conducted a experiment using secondary wastewater and the removal efficiency they obtained was about 100%. Cho et al.,2011 conducted a experiment in municipal wastewater and the maximum removal efficiency obtained was about 86%. In this study we obtained a maximum removal efficiency of 87%.

Total Kjeldhal Nitrogen: Total kjeldhal Nitrogen values were varied between 63 mg/L to 03 mg/L. The removal of phosphorus, from Municipal wastewater by microalgae cultivation as a function of incubation time are shown in Fig:3. After 107 days of algal cultivation, the Total kjeldhal Nitrogen content were reduced from 68 mg/L to 28 mg/L, 62 mg/L to 26 mg/L, 65 mg/L to 24 mg/L, 60 mg/L to 26mg/L, 64 mg/L to 28 mg/L, 36 mg/L to 30 mg/L and their removal efficiency were around 58%, 58%, 63%, 56%, 57%, 16%, for the respective Batch Cultures (01,02,03,04,05, CONTROL).

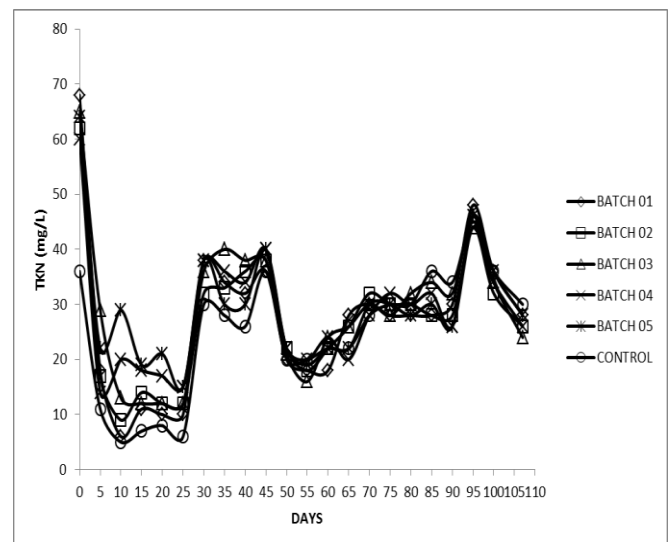


Fig 3 Changes of Total Kjeldhal Nitrogen values of different batch cultures during the treatment period

Wang & Lan., 2011, conducted an experiment using secondary wastewater and the removal efficiency obtained was about 78-99%. Cho et al.,2011 conducted a experiment in municipal wastewater and the maximum removal efficiency obtained was about 92%. In this study we obtained a maximum removal efficiency of 63%.

Chemical oxygen Demand: Chemical oxygen Demand values were varied between 430 mg/L to 60 mg/L. The removal of Chemical oxygen Demand from Municipal wastewater by microalgae cultivation as a function of incubation time is shown in Fig 4. After 107 days of algal cultivation, the Chemical oxygen Demand content were reduced from 410 mg/L to 110 mg/L, 240 mg/L to 120 mg/L, 280 mg/L to 130 mg/L, 430 mg/L to 90mg/L, 330 mg/L to 90 mg/L, 300 mg/L to 110 mg/L and their removal efficiency were around 73%, 50%, 53%, 79%, 73%, 63%, for the respective Batch Cultures (01,02,03,04,05, CONTROL).

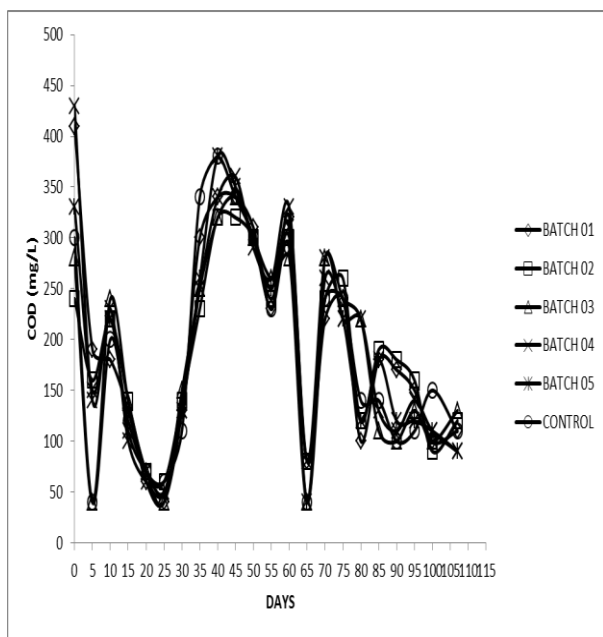


Fig 4: Changes of Chemical oxygen Demand values of different batch cultures during the treatment period

Cho et al.,2011, conducted a experiment in municipal wastewater and the maximum removal efficiency obtained was about 24.8%. In this study we obtained a maximum removal efficiency of 79%

Total Dissolved Solids Total Dissolved Solids values were varied between 2320 mg/L to 1040 mg/L. The growth of microalgae in terms of Total Dissolved Solids in Municipal wastewater as a function of incubation time is shown in Fig: 5 , respectively. After 107 days of algal cultivation, the Total Dissolved Solids content were increased from 1430 mg/L to 1880 mg/L, 1430 mg/L to 1990 mg/L, 1460 mg/L to 2005 mg/L, 1470 mg/L to 2180mg/L, 1470 mg/L to 2110 mg/L, 1080 mg/L to 2003 mg/L and their growth efficiency were around 31%, 39%, 37%, 48%, 43%, 85%, for the respective Batch Cultures (01,02,03,04,05, CONTROL). Of all the batch cultures CONTROL showed the greater increased efficiency for Total Dissolved Solids.

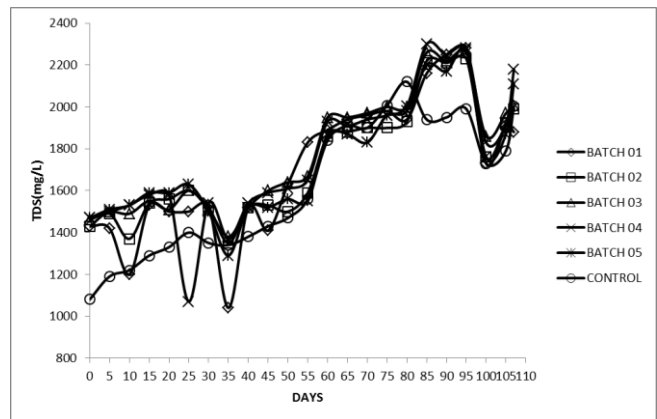


Fig 5 Changes of Total Dissolved Solids values of different batch cultures during the treatment period

Total Volatile Suspended Solids Total Volatile Suspended Solids values were varied between 1110 mg/L to 400 mg/L. The growth of microalgae in terms of Total Volatile Suspended Solids in Municipal wastewater as a function of incubation time is shown in Fig 6. After 107 days of algal cultivation, Total Volatile Suspended Solids content were increased from 500 mg/L to 1110 mg/L, 500 mg/L to 1000 mg/L, 400 mg/L to 800 mg/L, 400 mg/L to 800 mg/L, 400 mg/L to 800 mg/L, 400 mg/L to 800 mg/L and their growth efficiency were around 120%, 100%, 100%, 100%, 100%, 100%, for the respective Batch Cultures (01,02,03,04,05, CONTROL).

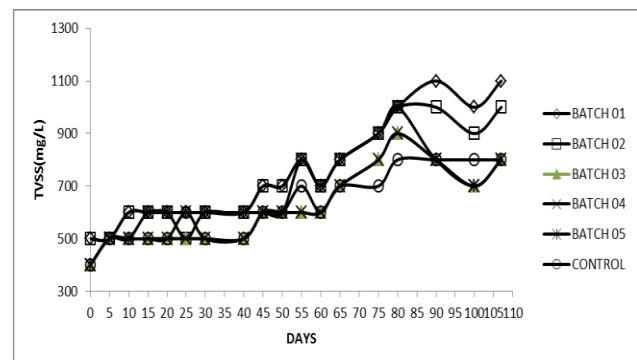


Fig 6 Changes of Total Volatile Suspended Solids values of different batch cultures during the treatment period

Li et al., 2011 conducted an experiment using municipal wastewater and the maximum biomass growth obtained was about 1.028 g/L. in this study the maximum biomass growth obtained in terms of TVSS is 1.11 g/L.

Salinity: Salinity values were varied between 695 mg/L to 1560 mg/L The growth of microalgae in terms of salinity in Municipal wastewater as a function of incubation time. After 107 days of algal cultivation, salinity content were increased from 939 mg/L to 1500 mg/L, 940 mg/L to 1510 mg/L, 956 mg/L to 1560 mg/L, 965 mg/L to 1470 mg/L, 967 mg/L to 1400 mg/L, 695 mg/L to 1350 mg/L and their growth efficiency were around 60%, 61%, 63%, 52%, 44%, 94%, for the respective Batch Cultures (01,02,03,04,05, CONTROL). Of all the batch cultures CONTROL showed the greater increased efficiency for Salinity.

IV. CONCLUSION

Municipal wastewater could support the growth of algal species isolated from water bodies. After 107 days of cultivating five genera's namely Anabaena, Diatoms, Spirogyra, Hyalophacus, Monoraphidium in municipal wastewater the total kjeldhal nitrogen was reduced to 58%, 58%, 63%, 56%, 57%, 16% and the total phosphorus was reduced to 82%, 87%, 87%, 84%, 87%, 86% respectively. The biomass produced can be used for combined benefit of sustainable biofuel production and wastewater treatment with simultaneous carbon dioxide sequestration

REFERENCES

1. Abou-Shanab, R.A.I., Hwang, Jae-Hoon, Cho, Yunchul, Min, Booki, Jeon, B.H., 2011a. Characterization of microalgal species isolated from fresh water bodies as a potential source for biodiesel production. *Applied Energy* 88, 3300-3306.
2. Abou-Shanab, R.A.I., Matter, Ibrahim A., Kim, Su-Nam, Oh, You-Kwan, Choi, Jaeyoung, Jeon, B.H., 2011b. Characterization and identification of lipid-producing microalgae species isolated from a freshwater lake. *Biomass and Bioenergy* 35, 3078-3085.
3. Bei Wang, Christopher Q. Lan (2011) Biomass production and nitrogen and phosphorus removal by the green alga *Neochloris oleoabundans* in simulated wastewater and secondary municipal wastewater effluent. *Bioresource Technology* 102: 5639–5644.
4. Clarens .A.F., Resurrection. E.P., White. M.A., Clossi. L.M., 2010. Environmental life cycle comparison of algae to other bioenergy feedstock. *Environmental Science and Technology* 44, 1813-1819.
5. Gonzalez, C., Marciniak, J., Villaverde, S., Garcia-Encina, P.A., Munoz, R., 2008. Microalgae-based processes for the biodegradation of pretreated piggery wastewaters. *Applied Microbiology and Biotechnology* 80, 891-898.
6. Krozer, Y., Hophmayer-Tokich, S., Meerendonk, H.V., Tijlma, S., Vos, E., 2010. Innovations in the water chain – experiences in The Netherlands. *Journal of Cleaner Production* 18, 439–446.
7. Kumar. M.S., Zhihong. H.M., Sandy. K.W., 2010. Influence of nutrient loads, feeding frequency and inoculum source on growth of *Chlorella vulgaris* in digested piggery effluent culture medium. *Bioresource Technology* 101, 6012-6018.
8. Lardon, L., Helias, A., Sialve, B., Steyer, J.P., Bernard, O., 2009. Life cycle assessment and biodiesel production from microalgae. *Environmental Science and Technology*, 43, 6475-6481.
9. Mulbry, W., Kondrad, S., Buyer, J., 2008. Treatment of dairy and swine manure effluents using freshwater algae: fatty acid content and composition of algal biomass at different manure loading rates. *Journal of Applied Phycology* 20, 1079-1085.
10. Richmond, A., 2004. *Handbook of Microalgal Culture: Biotechnology and Applied Phycology*. Blackwell Science Ltd
11. Sunja Cho, Thanh Thao Luong, Dukhaeng Lee, You-Kwan Oh, Taeho Lee (2011) , Reuse of effluent water from a municipal wastewater treatment plant in microalgae cultivation for biofuel production, *Bioresource Technology* 102 8639–8645.
12. Yang, J., Xu, M., Hu, Q., Sommerfeld, M., Chen, Y., 2011. Life-cycle analysis on bio-diesel production from microalgae: water footprint and nutrients balance. *Bioresource Technology* 102, 159-165.
13. Yecong Li, Wenguang Zhou, Bing Hu, Min Min, Paul Chen, Roger R. Ruan (2011) Integration of algae cultivation as biodiesel production feedstock with municipal wastewater treatment: Strains screening and significance evaluation of environmental factors *Bioresource Technology* 102 10861–10867.
14. Zhou, W., Min, Min, Li, Yecong, Hu, Bing, Ma, Xiaochen, Cheng, Yanling, Liu, Yuhuan, Chen, Paul, Ruan, Roger, 2012. A hetero-photoautotrophic two-stage cultivation process to improve wastewater nutrient removal and enhance algal lipid accumulation. *Bioresource Technology* 110, 448-455.

AUTHORS PROFILE

DR. Velan, Chief Manager, Corporate Environment Cell (CEC), Neyveli Lignite Corporation Ltd., (NLC) , Neyveli, B.E (Mech);, M.E (Thermal Power Engg) , Ph.D (Environment Science & Engineering),. More than 30 years of Solid experience in the field of Energy - Environmental Engineering. Major tasks carried out include R&D works in the area of Climate Change, CO₂ sequestration, sewage treatment, air & water pollution

control, Development of Eco friendly products, Clean coal Technology, setting up advanced Environmental Laboratory, Modelling and monitoring of Air and water pollutants, Risk assessment, Green Belt development, Leaching, Solid waste disposal, Eco restoration, CDM. Project Planning and implementation, Renewable Energy, Energy Conservation and Sustainability Development Projects at various Managerial cadres in Neyveli Lignite Corporation Ltd, a Navratna Govt. of India Enterprise has more than 3 decades of experience in Thermal power plants and achievable advanced technological attainments in the field of Environment and Energy. He

Dr.R. Saravanane, is an Environmental Engineer and obtained his Doctorate in Environmental Engineering from Indian Institute of Technology Madras, India (IIT M). He has been in teaching, research & development under Environmental Engineering for a period of 20 years since 1993. His major areas of research are water and energy. He is a member of International Water Association (IWA), UK and associated with specialist groups on anaerobic digestion and water reuse as members and coordinating potential activities on current issues and new developments. He has developed several new configurations and established biohydrogen production schemes from biotransformation of organic and recalcitrant wastes under dark fermentation, confined to sustainability issues.

