

Artificial Neural Networks (ANNS) For Prediction of Engineering Properties of Soils

Ch. Sudha Rani, Phani Kumar Vaddi, N. V. Vamsi Krishna Togati

Abstract - The behaviour of soil at the location of the project and interactions of the earth materials during and after construction has a major influence on the success, economy and safety of the work. Another complexity associated with some geotechnical engineering materials, such as sand and gravel, is the difficulty in obtaining undisturbed samples and time consuming involving skilled technician. Shear strength of a soil is perhaps the most important of its Engineering properties, as all stability analyses in the field of Geotechnical Engineering are dependent on Shear strength of soil. Permeability is very important engineering property of soils. Knowledge of permeability is essential in settlement of buildings, yield of wells, seepage trough and below the earth structures. The compression of a saturated soil under a steady static pressure is known as consolidation. It is entirely due to expulsion of water from the voids. To cope up with the difficulties involved, an attempt has been made to model Engineering properties of soil i.e. Shear Strength parameters, permeability and compression index in terms of Fine Fraction (FF), Liquid Limit (WL), Plasticity Index (IP), Maximum Dry density(MDD), and Optimum Moisture content(OMC). A multi-layer perceptron network with feed forward back propagation is used to model varying the number of hidden layers. For this purposes 68 soils test data was collected from the laboratory test results. Among the test data 47 soils data is used for training and remaining 27 soils for testing using 60-40 distribution. The architectures developed are 5-5-4(inputs-hidden layers-outputs), 5-6-4, 5-7-4, and 5-8-4. Model with 5-8-4 architecture is found to be quite satisfactory in predicting Engineering properties of soil i.e. Shear Strength parameters, permeability and compression index. Pictorial presentation of results gives a better idea than quantitative assessment. A graph is plotted between the predicted values and observed values of outputs for training and testing process, from the graph it is found that all the points are close to equality line, indicating predicted values are close to observed values.

KEY WORDS: Artificial Neural Networks, Shear Strength, permeability, Compression Index, Fine fraction, Liquid limit, Optimum Moisture content, Maximum Dry density and plasticity index.

I. INTRODUCTION

The main engineering properties of soils are permeability, compressibility, and shear strength. Permeability indicates the facility with which water can flow through soils. It is required for estimation of seepage discharge through earth masses. Compressibility is related with the deformation produced in soils when they are subjected to compressive loads.

Manuscript published on 30 June 2013.

*Correspondence Author(s)

Dr.CH. Sudha Rani, Associate Professor, Department of Civil Engineering, S.V.U.College of Engineering, Tirupathi. India.

Phani Kumar Vaddi, Assistant Professor, Dept. of Civil Engineering, Gudlavalluru engineering College, Gudlavalluru, Krishna dist. A.P., India.

N.V.Vamsi Krishna Togati, Assistant Professor, Department of Civil Engineering, Siddhartha educational academy group of institutions Gollapalli, Tirupathi, India.

© The Authors. Published by Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP). This is an [open access](http://creativecommons.org/licenses/by-nc-nd/4.0/) article under the CC-BY-NC-ND license <http://creativecommons.org/licenses/by-nc-nd/4.0/>

Compression characteristics are required for computation of the settlements of structures founded on soils. Shear strength of a soil is its ability to resist shear stresses. The shear strength determines the stability of slopes, bearing capacity of soils and the earth pressure on the retaining structures. A lot of maturity and skill may be required on the part of the engineer in interpreting the results of the laboratory tests for application to the conditions in the field. In order to cope with the above complexities, traditional forms of engineering modeling approaches are justifiably simplified. An alternative approach, which has shown some promise in the field of geotechnical engineering, is Artificial Neural Networks (ANN). In these investigation the engineering properties of soil i.e., Permeability (k), Compressibility (cc) and Shear Strength parameters (c, ϕ) (i.e. Cohesion and Angle of internal friction) for soils are predicted using Artificial Neural Networks (ANN). ANN model is developed using NN tool in MATLAB software (7.5.0). In the paper an attempt has been made to model the engineering properties of soil i.e., Permeability (k), Compressibility (cc) and Shear Strength parameters (c, ϕ) (i.e. Cohesion and Angle of internal friction) in terms of Fine Fraction (FF), Liquid Limit (WL), Plasticity Index (IP), Maximum Dry Density (MDD), and Optimum Moisture Content (OMC). A multi-layer perceptron network with feed forward back propagation is used to model the engineering properties of soil i.e., Permeability (k), Compressibility (cc) and Shear Strength parameters (c, ϕ) (i.e. Cohesion and Angle of internal friction) varying the number of hidden layers. The best neural network model is identified by analyzing the performance of different models studied.

II. ARTIFICIAL NEURAL NETWORK MODELS DEVELOPMENT

Artificial neural networks (ANN) are developed by the structured arrangement of simple processing unit called "neurons". Each neuron is a processing unit that performs a calculation on the input signal and outputs the result to the next neuron via "connections". Connections indicate flow of information from one neuron to another. A weight is assigned to each connection and therefore, the resulting "weighted signal" is passed to the next neurons. In a Multilayer Preceptron Network (MLP) the neurons are organized in the form of layers. It consists of an input layer, a hidden layer (or hidden layers), and an output layer, as shown in Fig. 1. In this type of network, each neuron has full connection to all neurons of the next layer but there is no connection between the neurons within the same layer. The neurons in the input layer represent number of input variables considered, while the output neurons identify the desired outputs.



Published By:
Blue Eyes Intelligence Engineering
and Sciences Publication (BEIESP)
© Copyright: All rights reserved.

Each neuron in the network has an activation function, usually expressed by sigmoid function through other types of activation functions, such as linear and hyperbolic tangent functions, and may be used as well. Weights are assigned randomly to all of the connections inside the network so that optimum values of these are attained for minimizing the network error measure (the difference between the actual and computed outputs gives the error) which will be back propagated through hidden layers for all training sets until the actual and calculated outputs agree with some predetermined tolerance. A multilayer perceptron neuron network is identified by its architecture, the way the neurons are arranged inside the network, and a learning rule. The learning rule is an algorithm used to determine the optimum values of the unknown weights that minimize the error measure of the network. A database is also required for training and testing the network. Feed-Forward-error-back-propagation network with supervised learning is currently used in applications relating to science and engineering. Fig.1. Shows typical three-layered network. In most of the neural networks the number of inputs, hidden nodes and the output in different layers has to be predetermined before feeding the data to the network based on the input considered and desired output from the model network. The number of hidden layers and neurons in each hidden layer are determined in contrast to the known output obtained from a known set of data used for training and this network topology can be generalized for prediction.

The objective of the present investigation is to develop a neural network model output being Compression index. The input parameters, for the networking should be those basic soil parameters, which has significant influence on Compression index. The details of the database used for training input parameters are presented in the following section.

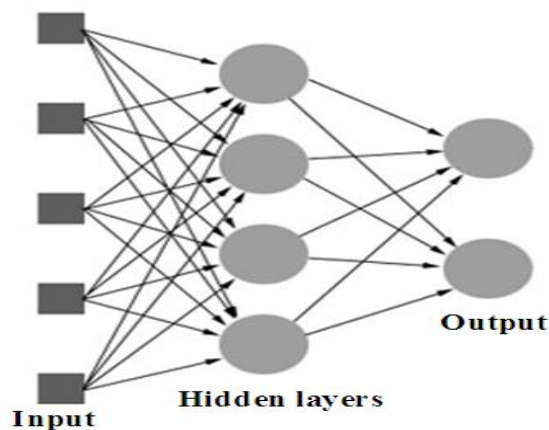


Fig. 1: The Architecture of Neural Network

A. Normalization of Data

Ideally a system designer wants the same range of values for each input feature in order to minimize bias within the neural network for one feature over another. Data normalization can also speed up training time by starting the training process for each feature within same scale. It is especially useful for modeling applications where the inputs are generally on widely different scales. The normalized data is determined by min-max normalization and is expressed as

$$X = 0.1 + 0.8 * (x_i / x_{\max})$$

Where

X = normalized value

x_i = input parameter

x_{\max} = maximum in input parameter

B. Data used for Training and Testing

The soil test data is divided into 2 parts using 60:40 mode of distribution. A total of 67 soils which is obtained from different parts of chitter district with wide range of W_L from laboratory tests. Among 41 soils data is used for testing and remaining 27 soils data is used for training. The typical normalized data used for training phase is presented in Table 1 and in Table 2 presents the typical normalized data used for testing phase.

C. Network Training and Testing

41 soils test data was used for training the neuron, training data is presented in Table I. Remaining 27 soils test data was used for testing the network model developed for prediction of Compression index of soils. Testing data is presented in Table II. The feed forward back propagation training network models have been coded into a MATLAB program using neural network toolbox. The MATLAB software enables training with different convergence criteria, tolerance level, activation functions and number of epochs. The neural network models studied in this investigation uses transfer function 'LOGSIG' as activation function. A constant value of learning rate equals to 0.001 was assigned for all the models. The network training/learning halts automatically once the mean square error value converges to a tolerance value of 0.5 or the Number epochs become equal to 2000 whichever is earlier. After this the network model is ready for prediction of desired output.

Table I. Normalized Data for Training the Neural Network Models

| S. No | FF | W_L | I_p | OMC | MD D | c | ϕ | c_c | k |
|-------|-------|-------|-------|------|------|------|--------|-------|------|
| 1 | 0.28 | 0.35 | 0.25 | 0.41 | 0.80 | 0.20 | 0.51 | 0.15 | 0.10 |
| 2 | 0.39 | 0.45 | 0.29 | 0.42 | 0.78 | 0.43 | 0.31 | 0.17 | 0.10 |
| 3 | 0.51 | 0.41 | 0.35 | 0.48 | 0.76 | 0.56 | 0.14 | 0.41 | 0.10 |
| 4 | 0.78 | 0.50 | 0.42 | 0.62 | 0.72 | 0.86 | 0.12 | 0.49 | 0.10 |
| 5 | 0.88 | 0.90 | 0.72 | 0.90 | 0.62 | 0.54 | 0.12 | 0.65 | 0.10 |
| 6 | 0.52 | 0.36 | 0.27 | 0.44 | 0.77 | 0.90 | 0.38 | 0.35 | 0.10 |
| 7 | 0.37 | 0.86 | 0.90 | 0.53 | 0.73 | 0.70 | 0.50 | 0.9 | 0.10 |
| 8 | 0.90 | 0.53 | 0.42 | 0.57 | 0.75 | 0.45 | 0.32 | 0.53 | 0.10 |
| 9 | 0.55 | 0.32 | 0.22 | 0.42 | 0.72 | 0.56 | 0.45 | 0.29 | 0.10 |
| 10 | 0.87 | 0.40 | 0.28 | 0.50 | 0.77 | 0.71 | 0.37 | 0.38 | 0.10 |
| 11 | 0.308 | 0.31 | 0.20 | 0.40 | 0.81 | 0.32 | 0.61 | 0.27 | 0.16 |
| 12 | 0.74 | 0.25 | 0.12 | 0.47 | 0.78 | 0.43 | 0.26 | 0.20 | 0.10 |
| 13 | 0.61 | 0.23 | 0.12 | 0.41 | 0.77 | 0.39 | 0.43 | 0.17 | 0.10 |
| 14 | 0.44 | 0.32 | 0.24 | 0.41 | 0.79 | 0.30 | 0.61 | 0.29 | 0.10 |
| 15 | 0.27 | 0.27 | 0.16 | 0.41 | 0.80 | 0.26 | 0.80 | 0.22 | 0.10 |
| 16 | 0.82 | 0.35 | 0.27 | 0.51 | 0.71 | 0.36 | 0.39 | 0.33 | 0.10 |
| 17 | 0.60 | 0.38 | 0.32 | 0.41 | 0.81 | 0.34 | 0.29 | 0.37 | 0.10 |

| S. No | FF | W _L | I _p | OMC | MD _D | c | φ | c _c | k |
|-------|------|----------------|----------------|------|-----------------|------|-------|----------------|------|
| 18 | 0.59 | 0.37 | 0.28 | 0.40 | 0.83 | 0.35 | 0.28 | 0.35 | 0.10 |
| 19 | 0.40 | 0.31 | 0.22 | 0.42 | 0.81 | 0.37 | 0.587 | 0.27 | 0.10 |
| 20 | 0.33 | 0.32 | 0.24 | 0.42 | 0.81 | 0.39 | 0.59 | 0.29 | 0.10 |
| 21 | 0.37 | 0.30 | 0.22 | 0.43 | 0.81 | 0.36 | 0.5 | 0.26 | 0.10 |
| 22 | 0.66 | 0.43 | 0.36 | 0.47 | 0.77 | 0.54 | 0.26 | 0.42 | 0.10 |
| 23 | 0.25 | 0.31 | 0.23 | 0.42 | 0.79 | 0.4 | 0.60 | 0.27 | 0.10 |
| 24 | 0.68 | 0.31 | 0.22 | 0.41 | 0.79 | 0.55 | 0.51 | 0.27 | 0.10 |
| 25 | 0.67 | 0.29 | 0.20 | 0.42 | 0.76 | 0.64 | 0.49 | 0.25 | 0.10 |
| 26 | 0.67 | 0.26 | 0.18 | 0.36 | 0.83 | 0.55 | 0.494 | 0.21 | 0.10 |
| 27 | 0.72 | 0.27 | 0.19 | 0.38 | 0.79 | 0.50 | 0.46 | 0.22 | 0.10 |
| 28 | 0.64 | 0.27 | 0.19 | 0.36 | 0.80 | 0.51 | 0.56 | 0.22 | 0.10 |
| 29 | 0.79 | 0.32 | 0.21 | 0.43 | 0.74 | 0.78 | 0.34 | 0.29 | 0.10 |
| 30 | 0.68 | 0.31 | 0.21 | 0.43 | 0.74 | 0.70 | 0.41 | 0.28 | 0.10 |
| 31 | 0.63 | 0.30 | 0.20 | 0.42 | 0.77 | 0.61 | 0.48 | 0.26 | 0.10 |
| 32 | 0.67 | 0.29 | 0.21 | 0.39 | 0.81 | 0.67 | 0.44 | 0.25 | 0.10 |
| 33 | 0.71 | 0.27 | 0.19 | 0.39 | 0.76 | 0.55 | 0.49 | 0.22 | 0.10 |
| 34 | 0.63 | 0.26 | 0.18 | 0.41 | 0.79 | 0.46 | 0.55 | 0.21 | 0.10 |
| 35 | 0.72 | 0.28 | 0.20 | 0.41 | 0.75 | 0.58 | 0.48 | 0.24 | 0.10 |
| 36 | 0.65 | 0.30 | 0.21 | 0.40 | 0.77 | 0.58 | 0.55 | 0.26 | 0.10 |
| 37 | 0.65 | 0.28 | 0.20 | 0.41 | 0.79 | 0.63 | 0.54 | 0.24 | 0.10 |
| 38 | 0.20 | 0.32 | 0.24 | 0.29 | 0.88 | 0.32 | 0.77 | 0.29 | 0.10 |
| 39 | 0.31 | 0.26 | 0.15 | 0.37 | 0.82 | 0.22 | 0.76 | 0.21 | 0.10 |
| 40 | 0.18 | 0.31 | 0.22 | 0.30 | 0.90 | 0.31 | 0.90 | 0.27 | 0.10 |
| 41 | 0.17 | 0.28 | 0.21 | 0.35 | 0.88 | 0.30 | 0.80 | 0.24 | 0.10 |

Table II. Typical Normalized Data for Testing the Neural Network Models

| S. No | FF | W _L | I _p | OMC | MD _D | c | φ | c _c | k |
|-------|-----|----------------|----------------|------|-----------------|------|------|----------------|------|
| 1 | 0.2 | 0.38 | 0.30 | 0.31 | 0.88 | 0.46 | 0.59 | 0.36 | 0.10 |
| 2 | 0.2 | 0.28 | 0.23 | 0.31 | 0.86 | 0.36 | 0.84 | 0.23 | 0.33 |
| 3 | 0.7 | 0.35 | 0.25 | 0.42 | 0.76 | 0.62 | 0.51 | 0.32 | 0.10 |
| 4 | 0.2 | 0.30 | 0.21 | 0.31 | 0.86 | 0.36 | 0.87 | 0.26 | 0.35 |
| 5 | 0.8 | 0.36 | 0.26 | 0.45 | 0.73 | 0.74 | 0.30 | 0.34 | 0.10 |
| S. No | FF | W _L | I _p | OMC | MD _D | c | φ | c _c | k |
| 6 | 0.2 | 0.29 | 0.20 | 0.32 | 0.86 | 0.33 | 0.88 | 0.24 | 0.62 |
| 7 | 0.6 | 0.36 | 0.27 | 0.42 | 0.77 | 0.73 | 0.33 | 0.34 | 0.10 |
| 8 | 0.5 | 0.38 | 0.27 | 0.47 | 0.76 | 0.70 | 0.38 | 0.36 | 0.10 |
| 9 | 0.2 | 0.33 | 0.23 | 0.31 | 0.83 | 0.53 | 0.62 | 0.29 | 0.31 |

Table III ANN Model Statistical Parameter Performance Indices

| Statistical parameter | Models | During training | | | | During testing | | | |
|-----------------------|--------|-----------------|-------|----------------|-------|----------------|-------|----------------|-------|
| | | c | φ | c _c | k | C | φ | c _c | k |
| CORR | 5-5-4 | 0.939 | 0.873 | 0.852 | 0.993 | 0.511 | 0.783 | 0.880 | 0.506 |

III. VALIDATION AND COMPARISON OF NETWORK PREFORMANCE

After training the ANN models were used to predict engineering properties of soil i.e., Permeability (k), Compressibility (c_c) and Shear Strength parameters (c, φ) (i.e. Cohesion and Angle of internal friction) of 27 soils reported in the literature. Data used for testing is shown in the Table II. The model developed for predicting the engineering properties of soil i.e., Permeability (k), Compressibility (c_c) and Shear Strength parameters (c, φ) (i.e. Cohesion and Angle of internal friction) are 5-5-4 (inputs-hidden layers-output), 5-6-4, 5-7-4, and 5-8-4. Among these models the best model proposed is 5-8-4 network model. The CORR or (R²) values for the developed models are presented in Table III. The ratio normalized observed values to the normalized predicted values in training are shown in Table IV to Table VII and testing values are shown in Table VIII to Table XI. The model performance is given in Fig. 3.1. Since graphical representation gives a clear idea, the same values are shown in Fig. 3.2 to Fig. 3.5 during training and Fig. 3.6 to Fig. 3.9 during testing respectively.

Artificial Neural Networks (ANNS) For Prediction of Engineering Properties of Soils

| | | | | | | | | | |
|--|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | 5-6-4 | 0.941 | 0.840 | 0.971 | 0.994 | 0.675 | 0.853 | 0.932 | 0.941 |
| | 5-7-4 | 0.865 | 0.976 | 0.980 | 0.996 | 0.799 | 0.941 | 0.965 | 0.979 |
| | 5-8-4 | 0.994 | 0.987 | 0.981 | 0.987 | 0.921 | 0.942 | 0.974 | 0.976 |

Table VI Comparison of Normalized Observed and Normalized Predicted values of c for Trained Data

| S. No. | Observed c (kpa) | Predicted c (kpa) | Ratio (observed/predicted) |
|--------|--------------------|---------------------|----------------------------|
| 1 | 0.205 | 0.210 | 0.98 |
| 2 | 0.435 | 0.434 | 1.00 |
| 3 | 0.567 | 0.567 | 1.00 |
| 4 | 0.862 | 0.862 | 1.00 |
| 5 | 0.543 | 0.531 | 1.02 |
| 6 | 0.900 | 0.899 | 1.00 |
| 7 | 0.705 | 0.703 | 1.00 |
| 8 | 0.450 | 0.449 | 1.00 |
| 9 | 0.568 | 0.568 | 1.00 |
| 10 | 0.717 | 0.716 | 1.00 |
| 11 | 0.328 | 0.321 | 1.02 |
| 12 | 0.432 | 0.429 | 1.01 |
| 13 | 0.398 | 0.395 | 1.01 |
| 14 | 0.309 | 0.314 | 0.99 |
| 15 | 0.264 | 0.265 | 1.00 |
| 16 | 0.367 | 0.367 | 1.00 |
| 17 | 0.340 | 0.339 | 1.00 |
| 18 | 0.350 | 0.351 | 1.00 |
| 19 | 0.371 | 0.353 | 1.05 |
| 20 | 0.395 | 0.388 | 1.02 |
| 21 | 0.360 | 0.383 | 0.94 |
| 22 | 0.545 | 0.544 | 1.00 |
| 23 | 0.477 | 0.477 | 1.00 |
| 24 | 0.555 | 0.564 | 0.98 |
| 25 | 0.624 | 0.622 | 1.00 |
| 26 | 0.515 | 0.542 | 0.95 |
| 27 | 0.501 | 0.509 | 0.99 |
| 28 | 0.511 | 0.496 | 1.03 |
| 29 | 0.748 | 0.748 | 1.00 |
| 30 | 0.720 | 0.717 | 1.00 |
| 31 | 0.615 | 0.595 | 1.03 |
| 32 | 0.677 | 0.646 | 1.05 |
| 33 | 0.554 | 0.529 | 1.05 |
| 34 | 0.467 | 0.481 | 0.97 |
| 35 | 0.588 | 0.597 | 0.99 |
| 36 | 0.583 | 0.626 | 0.93 |
| 37 | 0.631 | 0.623 | 1.01 |
| 38 | 0.323 | 0.335 | 0.96 |
| 39 | 0.220 | 0.218 | 1.01 |
| 40 | 0.316 | 0.306 | 1.03 |
| 41 | 0.302 | 0.302 | 1.00 |

Table V Comparison of Normalized Observed and Normalized Predicted values of ϕ for Trained Data

| S. No. | Observed ϕ (deg) | Predicted ϕ (deg) | Ratio (observed/predicted) |
|--------|-----------------------|------------------------|----------------------------|
| 1 | 0.514 | 0.508 | 1.01 |
| 2 | 0.312 | 0.313 | 1.00 |
| 3 | 0.142 | 0.152 | 0.94 |
| 4 | 0.120 | 0.120 | 1.00 |
| 5 | 0.126 | 0.119 | 1.06 |
| 6 | 0.384 | 0.385 | 1.00 |
| 7 | 0.506 | 0.506 | 1.00 |
| 8 | 0.320 | 0.327 | 0.98 |
| 9 | 0.459 | 0.462 | 1.00 |
| 10 | 0.378 | 0.384 | 0.99 |
| 11 | 0.610 | 0.600 | 1.02 |
| 12 | 0.262 | 0.262 | 1.00 |
| 13 | 0.432 | 0.432 | 1.00 |
| 14 | 0.610 | 0.580 | 1.05 |
| 15 | 0.807 | 0.800 | 1.01 |
| 16 | 0.399 | 0.360 | 1.11 |
| 17 | 0.297 | 0.296 | 1.00 |
| 18 | 0.286 | 0.258 | 1.12 |
| 19 | 0.587 | 0.590 | 1.00 |
| 20 | 0.599 | 0.601 | 1.00 |
| 21 | 0.575 | 0.585 | 0.98 |
| 22 | 0.286 | 0.267 | 1.07 |
| 23 | 0.610 | 0.611 | 1.00 |
| 24 | 0.501 | 0.480 | 1.05 |
| 25 | 0.459 | 0.500 | 0.92 |
| 26 | 0.494 | 0.494 | 1.00 |
| 27 | 0.466 | 0.466 | 1.00 |
| 28 | 0.506 | 0.518 | 0.98 |
| 29 | 0.343 | 0.344 | 1.00 |
| 30 | 0.413 | 0.408 | 1.01 |
| 31 | 0.483 | 0.500 | 0.97 |
| 32 | 0.448 | 0.502 | 0.89 |
| 33 | 0.499 | 0.499 | 1.00 |
| 34 | 0.552 | 0.510 | 1.08 |
| 35 | 0.483 | 0.508 | 0.95 |
| 36 | 0.552 | 0.516 | 1.07 |
| 37 | 0.546 | 0.500 | 1.09 |
| 38 | 0.770 | 0.765 | 1.01 |
| 39 | 0.761 | 0.764 | 1.00 |
| 40 | 0.900 | 0.878 | 1.03 |
| 41 | 0.807 | 0.813 | 0.99 |

Table VI Comparison of Normalized Observed and Normalized Predicted values of c_c for Trained Data

| S. No. | Observed c_c | Predicted c_c | Ratio (observed/predicted) |
|--------|----------------|-----------------|----------------------------|
|--------|----------------|-----------------|----------------------------|



| | | | |
|----|-------|-------|------|
| 1 | 0.156 | 0.234 | 0.67 |
| 2 | 0.179 | 0.197 | 0.91 |
| 3 | 0.415 | 0.419 | 0.99 |
| 4 | 0.492 | 0.491 | 1.00 |
| 5 | 0.652 | 0.660 | 1.00 |
| 6 | 0.354 | 0.345 | 1.03 |
| 7 | 0.900 | 0.900 | 1.00 |
| 8 | 0.563 | 0.561 | 1.00 |
| 9 | 0.293 | 0.263 | 1.11 |
| 10 | 0.389 | 0.367 | 1.06 |
| 11 | 0.274 | 0.237 | 1.15 |
| 12 | 0.206 | 0.229 | 0.90 |
| 13 | 0.177 | 0.177 | 1.00 |
| 14 | 0.293 | 0.271 | 1.08 |
| 15 | 0.225 | 0.235 | 0.96 |
| 16 | 0.331 | 0.312 | 1.06 |
| 17 | 0.370 | 0.344 | 1.08 |
| 18 | 0.351 | 0.344 | 1.02 |
| 19 | 0.274 | 0.279 | 0.98 |
| 20 | 0.293 | 0.285 | 1.03 |
| 21 | 0.264 | 0.280 | 0.94 |
| 22 | 0.428 | 0.459 | 0.93 |
| 23 | 0.274 | 0.251 | 1.09 |
| 24 | 0.274 | 0.277 | 0.99 |
| 25 | 0.254 | 0.258 | 0.99 |
| 26 | 0.216 | 0.219 | 0.98 |
| 27 | 0.225 | 0.227 | 0.99 |
| 28 | 0.225 | 0.228 | 0.99 |
| 29 | 0.293 | 0.294 | 1.00 |
| 30 | 0.283 | 0.290 | 0.98 |
| 31 | 0.264 | 0.271 | 0.97 |
| 32 | 0.254 | 0.258 | 0.99 |
| 33 | 0.225 | 0.230 | 0.98 |
| 34 | 0.216 | 0.213 | 1.01 |
| 35 | 0.245 | 0.248 | 0.99 |
| 36 | 0.264 | 0.268 | 0.98 |
| 37 | 0.245 | 0.246 | 1.00 |
| 38 | 0.293 | 0.287 | 1.02 |
| 39 | 0.216 | 0.208 | 1.04 |
| 40 | 0.274 | 0.282 | 0.97 |
| 41 | 0.245 | 0.226 | 1.08 |

Table VII Comparison of Normalized Observed and Normalized Predicted values of k for Trained Data

| S. No. | Observed k cm/sec | Predicted k cm/sec | Ratio (observed/predicted) |
|--------|-------------------|--------------------|----------------------------|
| 1 | 0.101 | 0.078 | 1.29 |
| 2 | 0.100 | 0.111 | 0.90 |

| | | | |
|----|-------|-------|------|
| 3 | 0.100 | 0.111 | 0.90 |
| 4 | 0.100 | 0.103 | 0.97 |
| 5 | 0.100 | 0.098 | 1.02 |
| 6 | 0.100 | 0.111 | 0.90 |
| 7 | 0.100 | 0.116 | 0.86 |
| 8 | 0.100 | 0.104 | 0.96 |
| 9 | 0.101 | 0.100 | 1.01 |
| 10 | 0.100 | 0.102 | 0.98 |
| 11 | 0.168 | 0.131 | 1.28 |
| 12 | 0.102 | 0.101 | 1.00 |
| 13 | 0.101 | 0.104 | 0.96 |
| 14 | 0.100 | 0.112 | 0.90 |
| 15 | 0.100 | 0.076 | 1.32 |
| 16 | 0.100 | 0.084 | 1.19 |
| 17 | 0.100 | 0.113 | 0.89 |
| 18 | 0.100 | 0.114 | 0.87 |
| 19 | 0.121 | 0.112 | 1.08 |
| 20 | 0.112 | 0.107 | 1.05 |
| 21 | 0.118 | 0.112 | 1.06 |
| 22 | 0.101 | 0.109 | 0.93 |
| 23 | 0.101 | 0.063 | 1.60 |
| 24 | 0.101 | 0.107 | 0.94 |
| 25 | 0.101 | 0.103 | 0.98 |
| 26 | 0.103 | 0.111 | 0.93 |
| 27 | 0.102 | 0.105 | 0.97 |
| 28 | 0.102 | 0.109 | 0.94 |
| 29 | 0.100 | 0.094 | 1.06 |
| 30 | 0.100 | 0.098 | 1.01 |
| 31 | 0.100 | 0.106 | 0.95 |
| 32 | 0.100 | 0.109 | 0.92 |
| 33 | 0.101 | 0.100 | 1.01 |
| 34 | 0.101 | 0.107 | 0.95 |
| 35 | 0.102 | 0.097 | 1.05 |
| 36 | 0.102 | 0.106 | 0.97 |
| 37 | 0.102 | 0.108 | 0.94 |
| 38 | 0.100 | 0.130 | 0.78 |
| 39 | 0.102 | 0.084 | 1.20 |
| 40 | 0.900 | 0.865 | 1.04 |
| 41 | 0.102 | 0.120 | 0.85 |

Table VIII Comparison of Normalized Observed and Normalized Predicted values of c for Tested Data

| S. No. | Observed c (kpa) | Predicted c (kpa) | Ratio (observed/predicted) |
|--------|------------------|-------------------|----------------------------|
|--------|------------------|-------------------|----------------------------|

| | | | |
|----|-------|-------|------|
| 1 | 0.460 | 0.455 | 1.01 |
| 2 | 0.364 | 0.352 | 1.04 |
| 3 | 0.617 | 0.734 | 0.84 |
| 4 | 0.364 | 0.389 | 0.94 |
| 5 | 0.741 | 0.760 | 0.97 |
| 6 | 0.330 | 0.323 | 1.02 |
| 7 | 0.734 | 0.699 | 1.05 |
| 8 | 0.700 | 0.617 | 1.13 |
| 9 | 0.525 | 0.524 | 1.00 |
| 10 | 0.693 | 0.692 | 1.00 |
| 11 | 0.429 | 0.448 | 0.96 |
| 12 | 0.374 | 0.375 | 1.00 |
| 13 | 0.285 | 0.285 | 1.00 |
| 14 | 0.683 | 0.617 | 1.11 |
| 15 | 0.730 | 0.747 | 0.98 |
| 16 | 0.754 | 0.704 | 1.07 |
| 17 | 0.890 | 0.790 | 1.13 |
| 18 | 0.893 | 0.772 | 1.16 |
| 19 | 0.835 | 0.706 | 1.18 |
| 20 | 0.477 | 0.488 | 0.98 |
| 21 | 0.484 | 0.485 | 1.00 |
| 22 | 0.467 | 0.450 | 1.04 |
| 23 | 0.480 | 0.450 | 1.07 |
| 24 | 0.549 | 0.586 | 0.94 |
| 25 | 0.477 | 0.520 | 0.92 |
| 26 | 0.343 | 0.346 | 0.99 |
| 27 | 0.545 | 0.507 | 1.08 |

Table IX Comparison of Normalized Observed and Normalized Predicted values of ϕ for Tested Data


| S. No. | Observed ϕ (deg) | Predicted ϕ (deg) | Ratio (observed/predicted) |
|--------|-----------------------|------------------------|----------------------------|
| 1 | 0.594 | 0.599 | 0.99 |
| 2 | 0.842 | 0.863 | 0.98 |
| 3 | 0.506 | 0.370 | 1.37 |
| 4 | 0.865 | 0.835 | 1.04 |
| 5 | 0.297 | 0.265 | 1.12 |
| 6 | 0.877 | 0.883 | 0.99 |
| 7 | 0.332 | 0.367 | 0.91 |
| 8 | 0.378 | 0.474 | 0.80 |
| 9 | 0.622 | 0.614 | 1.01 |
| 10 | 0.541 | 0.545 | 0.99 |
| 11 | 0.425 | 0.400 | 1.06 |
| 12 | 0.668 | 0.664 | 1.01 |
| 13 | 0.738 | 0.744 | 0.99 |
| 14 | 0.390 | 0.417 | 0.94 |
| 15 | 0.332 | 0.317 | 1.05 |
| 16 | 0.297 | 0.292 | 1.02 |
| 17 | 0.216 | 0.247 | 0.87 |
| 18 | 0.251 | 0.347 | 0.72 |
| 19 | 0.193 | 0.240 | 0.80 |
| 20 | 0.599 | 0.610 | 0.98 |
| 21 | 0.541 | 0.537 | 1.01 |
| 22 | 0.575 | 0.559 | 1.03 |
| 23 | 0.483 | 0.397 | 1.22 |
| 24 | 0.501 | 0.475 | 1.06 |
| 25 | 0.529 | 0.513 | 1.03 |
| 26 | 0.622 | 0.625 | 1.00 |
| 27 | 0.459 | 0.486 | 0.95 |

Table X Comparison of Normalized Observed and Normalized Predicted values of c_c for Tested Data

| S. No. | Observed c_c | Predicted c_c | Ratio (observed/predicted) |
|--------|----------------|-----------------|----------------------------|
| 1 | 0.360 | 0.369 | 0.98 |
| 2 | 0.235 | 0.234 | 1.00 |
| 3 | 0.322 | 0.322 | 1.00 |
| 4 | 0.264 | 0.256 | 1.03 |
| 5 | 0.341 | 0.310 | 1.10 |
| 6 | 0.245 | 0.246 | 0.99 |
| 7 | 0.341 | 0.341 | 1.00 |
| 8 | 0.360 | 0.340 | 1.06 |
| 9 | 0.293 | 0.294 | 1.00 |
| 10 | 0.312 | 0.299 | 1.04 |
| 11 | 0.293 | 0.293 | 1.00 |
| 12 | 0.274 | 0.274 | 1.00 |
| 13 | 0.254 | 0.255 | 1.00 |
| 14 | 0.389 | 0.389 | 1.00 |
| 15 | 0.370 | 0.370 | 1.00 |
| 16 | 0.466 | 0.420 | 1.11 |
| 17 | 0.283 | 0.283 | 1.00 |
| 18 | 0.360 | 0.360 | 1.00 |
| 19 | 0.245 | 0.245 | 1.00 |
| 20 | 0.389 | 0.389 | 1.00 |
| 21 | 0.466 | 0.456 | 1.02 |
| 22 | 0.409 | 0.410 | 1.00 |
| 23 | 0.351 | 0.351 | 1.00 |
| 24 | 0.466 | 0.465 | 1.00 |
| 25 | 0.293 | 0.293 | 1.00 |
| 26 | 0.274 | 0.274 | 1.00 |
| 27 | 0.438 | 0.436 | 1.00 |

Table XI Comparison of Normalized Observed and Normalized Predicted values of k for Tested Data

| S. No. | Observed k cm/sec | Predicted k cm/sec | Ratio (observed/predicted) |
|--------|---------------------|----------------------|----------------------------|
| 1 | 0.100 | 0.100 | 1.00 |
| 2 | 0.327 | 0.327 | 1.00 |
| 3 | 0.102 | 0.101 | 1.02 |
| 4 | 0.347 | 0.390 | 0.89 |
| 5 | 0.101 | 0.101 | 1.00 |
| 6 | 0.621 | 0.582 | 1.07 |
| 7 | 0.101 | 0.101 | 1.00 |
| 8 | 0.100 | 0.101 | 1.00 |
| 9 | 0.312 | 0.312 | 1.00 |
| 10 | 0.726 | 0.583 | 1.25 |
| 11 | 0.101 | 0.101 | 1.01 |
| 12 | 0.181 | 0.181 | 1.00 |
| 13 | 0.143 | 0.143 | 1.00 |
| 14 | 0.100 | 0.101 | 1.00 |
| 15 | 0.100 | 0.101 | 1.00 |
| 16 | 0.101 | 0.101 | 1.01 |
| 17 | 0.102 | 0.080 | 1.28 |
| 18 | 0.100 | 0.083 | 1.21 |
| 19 | 0.100 | 0.101 | 1.00 |
| 20 | 0.102 | 0.102 | 0.99 |
| 21 | 0.100 | 0.100 | 1.00 |
| 22 | 0.101 | 0.101 | 1.01 |



| | | | |
|----|-------|-------|------|
| 23 | 0.100 | 0.101 | 1.00 |
| 24 | 0.100 | 0.101 | 1.00 |
| 25 | 0.100 | 0.101 | 1.00 |
| 26 | 0.102 | 0.102 | 1.00 |
| 27 | 0.100 | 0.101 | 1.00 |

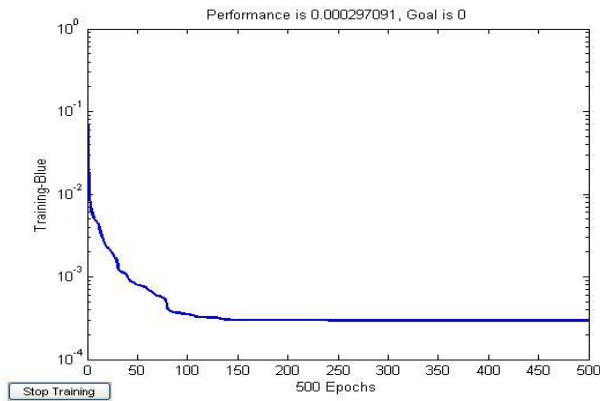


Fig.3.1 Model performance indication graph

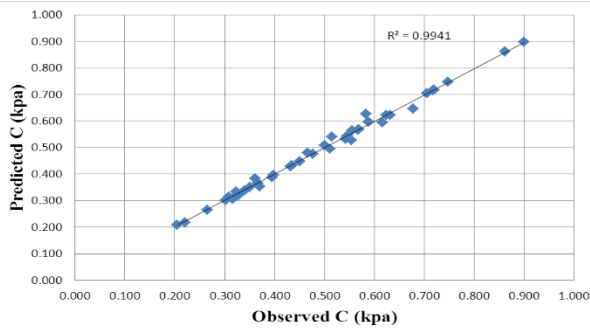


Fig.3.2 Observed c Vs Predicted c during Training

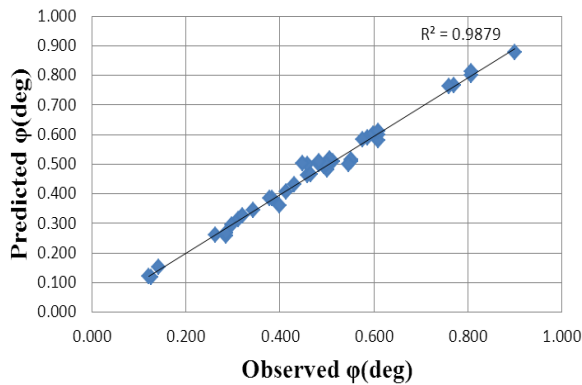


Fig.3.3 Observed ϕ Vs Predicted ϕ during Training

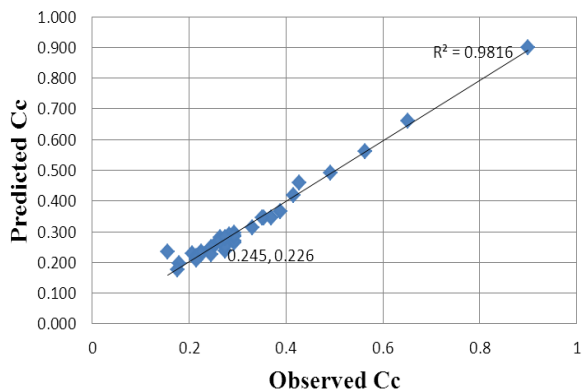


Fig.3.4 Observed c_c Vs Predicted c_c during Training

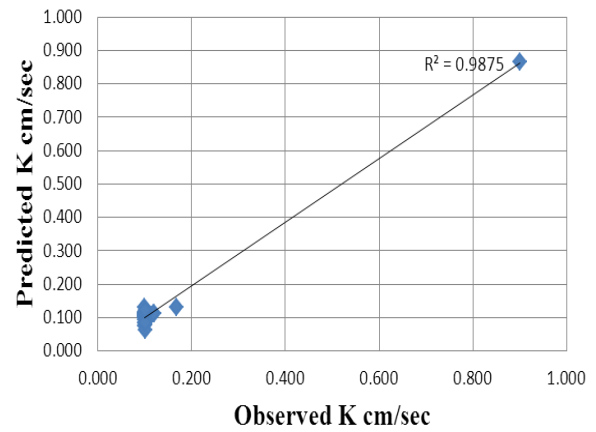


Fig.3.5 Observed k Vs Predicted k during Training

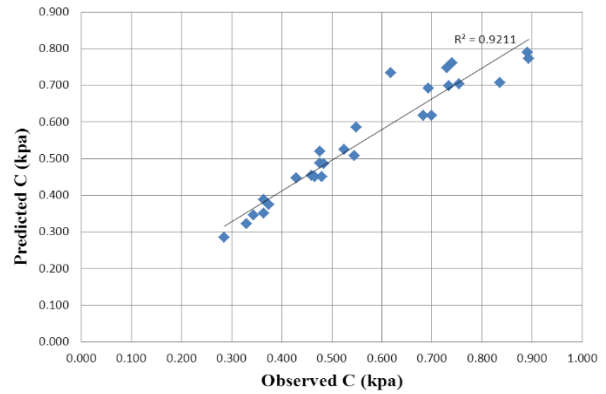


Fig.3.6 Observed c Vs Predicted c during Testing

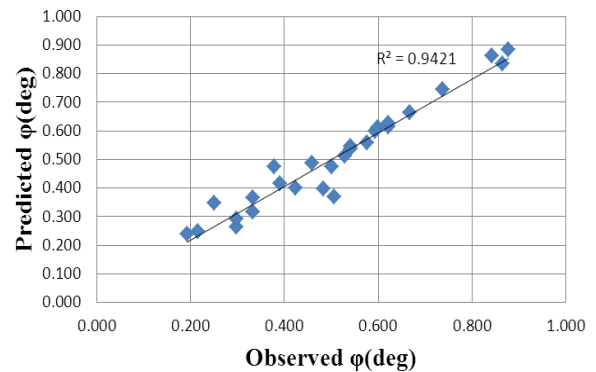


Fig.3.7 Observed ϕ Vs Predicted ϕ during Testing

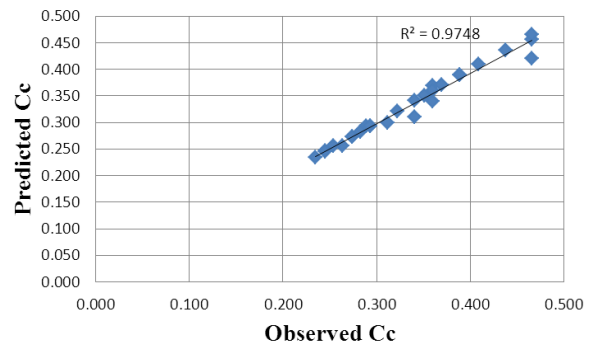


Fig.3.8 Observed c_c Vs Predicted c_c during Testing

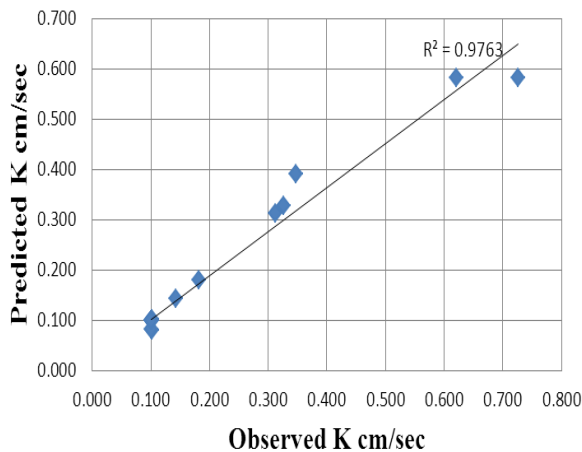


Fig.3.9 Observed k Vs Predicted k during Testing

IV. CONCLUSIONS

Architecture of Proposed Model is shown in fig 4.1:

Inputs : 5

Neurons : 8

Outputs : 4

Transfer Function: Feed Forward Back Propagation

Activation Function: Log sigmoid

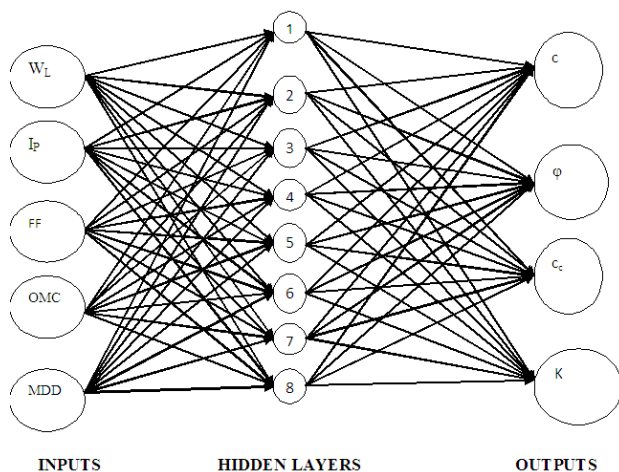


Fig.4.1. Architure of Proposed Model

An artificial neural network model with 5-8-4 architecture with a Feed Forward Back propagation using algorithm Log sigmoid activation function was developed to predict engineering properties of soil i.e., Permeability (k), Compressibility (c_c) and Shear Strength parameters (c, ϕ) (i.e. Cohesion and Angle of internal friction) using basic soil properties FF(%), W_L (%), I_P (%), MDD and OMC as input parameters. The network is trained with 41 soils test data. The performance of the model is verified for 27 soils test data. The proposed neural network model is found to be quite satisfactory in predicting desired output.

This is the foremost model for predicting the engineering properties i.e., Strength parameters, Permeability and Compressibility of soils using Artificial Neural Network.

REFERENCES

1. E.R. Levine, D.S. Kimes, V.G. Sigillito, "Classifying soil structure using neural networks", *Ecological Modelling* 92 (1996) 101-108.
2. Ghabousi J, Garrett JR, Wu X, "Knowledge based modeling of material behavior with neural networks", *ASCE J EngMech* 1991; 117(1):132-53.

3. Hornik KM, Stinchcombe M, White H, "Multi-layer feedforward networks are universal approximator", *Neural Networks*, 1994; 2(5):359-66.
4. Kwok, T.Y., Yeung, D.Y., "Constructive Algorithms for Structure Learning in Feedforward Neural Networks for Regression Problems", *IEEE Trans. Neural Networks*, 1997, 8 (3), 630-645.
5. Levine, E.R., Kimes, D.S., Sigillito, V.G., "Classifying soil structure using neural networks", *Ecol. Model.* 1996, 92 (1), 101-108.
6. M.A. Shahin, M.B. Jaksa, H.R. Maier, "Artificial neural network applications in geotechnical engineering", *Australian Geomechanics* 36 (1) (2001) 49-62.
7. M. Banimahd, S.S. Yasrobi, P.K. Woodward, "Artificial neural network for stress-strain behavior of sandy soils: Knowledge based verification", *Computers and Geotechnics* 32 (2005) 377-386.
8. Pernot S, Lamarque CH, "Application of neural networks to the modeling of some constitutive laws", *Neural Networks* 1999;12:371-92.
9. Rumelhart, D.E., Hinton, G.E. and Williams, R.J., "Learning representations by back-propagation errors", *Nature*, 1986, 323: 533-536.
10. S.K. Das, P.K. Basudhar, "Prediction of coefficient of lateral earth pressure using artificial neural networks", *Electronic Journal of Geotechnical Engineering*, 10—Bundle A (2005) paper 0506.
11. Wang J, Rahman MS, "A neural network model for liquefaction induced horizontal ground displacement", *Soil Dynamics and Earthquake Engineering* 1999; 18(8):555-68.
12. YushunZhai, J. Alex Thomassonb, Julian E, Boggess III, Ruixiu Sui, "Soil texture classification with artificial neural networks operating on remote sensing data", *Computers and Electronics in Agriculture* 54 (2006) 53-68.