

Forecasting Trip Production Based on Residential Land Use Characteristics

Padmini A.K., Abdul Malik K.V., Leena Samuel Panackel

Abstract— *Travel demand forecasting models are the key elements for the development of a long-range transportation plan. This paper focuses its study on the formulation of a trip production model using multiple regression technique for the residential land use in medium sized towns of Kerala. The trip production model estimated the number of trips that will be produced from the residential land use of these medium sized towns. The Perinthalmanna, Tirur, and Ponnani towns of Kerala were selected as the study area based on certain criteria. Household interviews were conducted through the administration of questionnaires for data collection on demographic and socio-economic characteristics these areas. The results were then analyzed quantitatively and qualitatively using the correlation and multiple regression analysis. The study showed that the regression model with the independent variables such as the percentage of automobile availability, percentage of persons employed, percentage of students and percentage of pucca type of dwelling with R^2 and Adjusted R^2 value of 0.878 and 0.859 respectively gives a better estimate of the trips produced. Since most of the work related to traffic and transportation planning requires an effective framework for the analysis of the present and future travel demand pattern, a model forecasting the trip produced based on the above mentioned characteristics shall be advantageous for a speedy travel demand forecast.*

Index Terms—*Multiple Linear Regression, Residential Land Use, Socio-Economic Characteristics, Trip Production*

I. INTRODUCTION

Transportation forms the backbone of a town's development. There are no such things as town without traffic and human settlement grow up at every transportation node. It is a known fact that towns determine the axis along which traffic must move and that transportation gives any town its form and confirms the layout. Transportation is known to be the movement of people, goods and service from one place to another under a desirable condition while transportation planning is concerned with the development of a plan with respect to the social, economic and environmental impacts of the populace to enhance positive goals [1]. The fundamental goal of transportation planning is to accommodate the need for mobility in order to provide efficient access to various activities that satisfy human needs. The traffic demands are usually forecasted based on the assumption that they are related to human travel behavior, land use, and travel patterns. Transportation planning also includes the travel demand and travel trip alongside with its generation, distribution, mode of travel and route

Manuscript Received July, 2013.

Dr. Padmini A.K., Department of Civil Engineering, Rajiv Gandhi Institute of Technology, Kottayam, India.

Mr. Abdul Malik K.V., Town and Country Planning Department Malappuram, India.

Ms. Leena Samuel Panackel, Department of Civil Engineering, Rajiv Gandhi Institute of Technology, Kottayam, India.

assignment. Travel trip is a derived demand, in that people do not travel for travel's sake but to facilitate community activities, both socially and economically.

Each trip is therefore made for a particular purpose and is also dependent on many factors varying from income, automobile availability, age, distance and many more [2].

The history of demand modeling for person travel has been dominated by the modeling approach that has come to be referred to as the four step model [3]. The urban travel estimation process which determines both present and future travel patterns are Trip Generation, Trip Distribution, Modal Split and Traffic Assignment. Travel demand models are driven in part, by the relationship of land use activities and characteristics to the transportation network. Models are used to determine where future transportation problems are likely to be as indicated by congested roads. Once identified, the model can test the ability of highway and transit system improvements to address those problems. Trip origin-destination (O-D) rather than activity surveys form the principle database. Specific inputs to the modeling process are land use activity including the number of households, population-in-households, vehicles and employment located in a given analysis zone (TAZ). The number of trips produced is one of the most vital tools for the future planning of the transportation networks and for the proper land use allocation. Thus, this research will focus on the trip production in the study location.

Trip generation is the first step in the conventional four step transportation forecasting process, which is widely used for forecasting travel demands. It predicts the number of trips originating in or destined for a particular traffic analysis zone [3-4]. The trip generation consist of the trip production and trip attraction. The trip production analysis focusing on residences and residential trip generation is thought of as a function of social and economic attributes of households [1-5]. At the level of the traffic analysis zone, residential land uses produce or generate trips. Residential land use is the main trip generator in an urban context. Household generated trips comprise a major portion of all trips in an urban area. Actually more than 80% of trips in an urban area are generated by the residents of households in the area. The various characteristics of residential land use such as density, demographic, socio-economic factors etc influence the number of trip generated from an area. The household surveys are conducted to obtain the socio-economic as well as trip details of the residential areas [5-6]. Since most of the work related to traffic and transportation planning requires an effective framework for the analysis of the present and future travel demand pattern, a model forecasting the trip production based on the above mentioned characteristics shall be advantageous for a speedy travel demand forecast. The majority of trip-generation studies performed have used multiple regression analysis to develop the prediction equations for

the trips generated by various types of land use.

The various papers that based their studies on the forecasting of trip generation were generally seen to use certain similar parameters in their work.

It was mainly seen that most these authors used the explanatory variables such as socio-economic data, demographic details of household and land use pattern has the basic and key input data in their studies [1-6]. The most popular methods have come to be known as Land Area Trip Rate Analysis, Cross Classification Analysis, and Regression Analysis [8-9]. Many of the studies have relied upon on the multiple regression technique for determining the gross number of trips produced from the study areas [1-7]. The attempt of using this method even at the recent times gives a strong indication of the reliability of this method in forecasting trip production. But at the same time, some of the papers have tried to stand out by implementing method different from the conventional trip generation forecasting method [10-12]. These papers have tried to improve the existing techniques through their proposals.

Thus in this paper the main technique used for the trip production analysis is the multiple linear regression method. This process consists of developing equations in which trips are related to independent variables which explain the variation in dependent variables (trips). The equations are usually developed based on data aggregated to the zone level observation. The correlation and multiple regression analysis was used for the analysis work in this paper. Thus as an output the model would be able to forecast the future trips produced from residential land use of medium size towns throughout Kerala.

II. STUDY AREA

The selection of the study area forms the first and most primary step towards a model building. The study area for this report is selected in such a way that they represent the majority of the towns in Kerala and thus expanding the scope of the model and not restricting it to a certain area.

A. Selection Criteria

The selection of the towns to represent the study area was chosen in such a way as to satisfy three criteria. The towns in Kerala can be broadly classified into three types such as coastal, midland and highland area based on its geographical division, most of the towns are of medium sized and they are of varied characteristics. Thus taking into account these three criteria, the Perinthalmanna, Tirur, and Ponnani towns in the Malappuram district were selected as the study area. Perinthalmanna is a town with strong historical and cultural heritage with an area of 34.41 km² and constitutes of 34 wards.

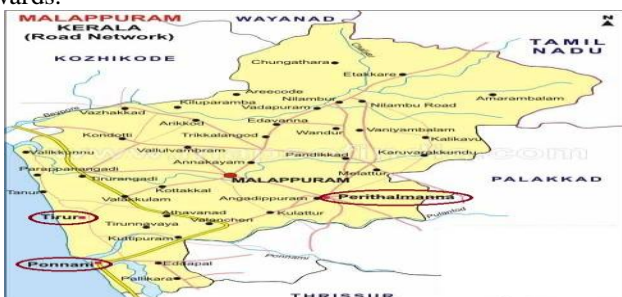


Fig. 1 Location of selected study area

It has for last several centuries remained as the center of trading and commercial activity for several villages around it. As of 2001 census, Perinthalmanna had a population of 44,613 out of which males constituted 48% of the population and females 52%. Tirur is a municipal town in Malappuram district spread over an area of 16.55 km² and constitutes of 38 wards. It is one of the most important business centers of Malappuram district. As of 2001 census, Tirur had a population of 53,650 out of which males constitute 48% of the population and females 52%.

Ponnani is a coastal municipality and an important fishing center in Malappuram district spread over an area of 24.82 km² and constitutes of 51 wards. As of 2001 census, Ponnani had a population of 87,356 out of which males constitute 48% of the population and females constitute 52%. The Perinthalmanna and Tirur town belongs to the geographical classification of midland area, whereas the Ponnani town falls under the coastal classification and all these towns are of medium sized. The Perinthalmanna town is known as the hospital city, the Tirur town is known for its commercial development whereas the Ponnani town is known as important fishing center. Since they satisfy the three stated criteria, these towns were taken as the study area.

III. METHODOLOGY

The goal of trip production process is to forecast the number of person-trips that will begin from the residential land use contained in the area of study. The study area were selected such that they satisfy three criteria that they belong to a geographical division of coastal, midland and highland area, the towns are of medium size and are of varied characteristics to represent the majority of towns in Kerala. The work is conducted by dividing the towns into zones and for the analysis work, each of the zones of these towns shall coincide with the municipal wards consisting of low, medium and high residential area. The work is progressed by the collection of relevant land use characteristics of the selected towns in Kerala, for obtaining the concentration of residential land use. The research on forecasting trip production is carried out by selecting 50 wards from the selected towns on the basis of the concentration index of the residential land use. Household survey was conducted through the administration of questionnaires. The socio-economic and trip details pertaining to the selected wards were collected. The socio-economic characteristics that are relevant for this study can be broadly classified as household size, age, income, vehicle ownership and other home-based elements. The origin-destination details obtained from the household survey was used to form the O-D matrix that gives the gross number of trips produced from each of the wards within the particular zones. The multiple linear regression technique was implemented for the model development. The sample size for the model formulation and validation was selected using the holdout method, where 60% of the data was used as the training set and 40% of data as the testing set. The statistical analysis of the data was done using the correlation and multiple regression analysis. Thus as an output the model would be able to forecast the future trips produced from residential land use of

medium sized towns throughout Kerala.

IV. DATA COLLECTION

A. Dependent Variables

The dependent variables would be the number of trip produced from each of the wards within the divided zones in the selected towns. The data pertaining to the number of trips produced from each of the ward was obtained by conducting the socio-economic survey and forming the O-D matrix. To understand the behavior and factors affecting the travel, one has got the origin of travel when the decision for travel is made. It is where people live as family which is the household. Therefore household data is considered to be the most basic and authentic information about the travel pattern of a city. Ideally one should take the details of all the people in the study to get complete travel details. However, this is not feasible due to large requirement of time and resources needed. In addition this will cause difficulties in handling these large data in modeling stage. Therefore, some sample households are randomly selected and survey is conducted to get the household data. Higher sample size is required for large population size, and vice-versa. Normally minimum ten percent samples are required for population less than 50,000. The socio-economic survey for the thesis work was carried out by using the sampling technique, as it is not possible to take into account the entire households within the town. Thus a sampling of 10% was taken to conduct the socio-economic survey. From the socio-economic survey, the origin destination details of each ward within the zones were obtained and these trip details were used to form the O-D matrix. The Fig 2 shows the number of trips produced from each of the selected wards within the three selected towns.

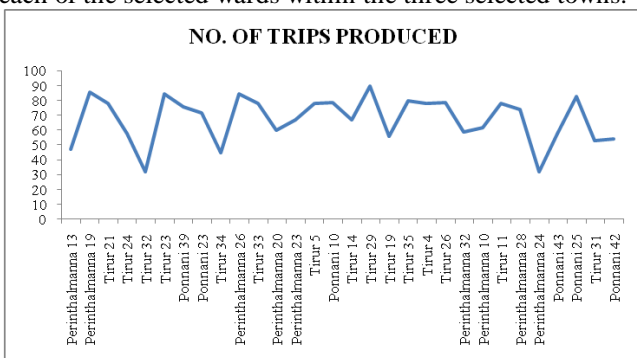


Fig. 2 Trips Produced

B. Independent Variables

The independent or explanatory variables are key input factors that influence the number of trips produced from the wards of a town. The identified independent variables are listed below:

- i. Income
- ii. Automobile availability
- iii. Dwelling type
- iv. Average household size
- v. Age
- vi. Gender
- vii. Students
- viii. Persons employed
- ix. Marital status

These variables were identified based on the review of

several related papers and also based on the influence of these variables on the trip produced. The socio economic survey was conducted to obtain information regarding the above identified variables. For conducting of the socio-economic survey, the key factor is the modulation of an ideal survey questionnaire. From the survey, the details pertaining to the identified independent variables are collected for the 30 wards that was used in the model formulation part and for the 20 wards that was used for the model validation part.

V. STATISTICAL ANALYSIS OF DATA

The majority of trip-generation studies performed have used multiple regression analysis to develop the prediction equations for the trips generated by various types of land use. Multiple linear regression attempts to model the relationship between two or more explanatory variables and a response variable by fitting a linear equation to observed data.

A. Model Formulation

Formulating good models is an art bordering on a science. The artistic ability is in developing simple models that are nevertheless good approximations of reality. In this paper, 30 wards along with its identified independent variables were selected for the model formulation. Correlation and regression analysis was performed using Microsoft excel for model formulation.

Correlation of Variables:

Correlation and regression analysis are related in the sense that both deal with relationships among variables. The correlation coefficient is a measure of linear association between two variables. Values of the correlation coefficient are always between -1 and +1. A correlation coefficient of +1 indicates that two variables are perfectly related in a positive linear sense, a correlation coefficient of -1 indicates that two variables are perfectly related in a negative linear sense, and a correlation coefficient of 0 indicates that there is no linear relationship between the two variables. The table I depict the correlation between each of the independent variables with the dependent variable (trips produced). It is seen from the table I that the variables $x_1, x_4, x_5, x_{12}, x_{13}, x_{14}, x_{17}$, and x_{18} are moderately correlated with the trip produced. Among the moderately correlated variables, the independent variables x_1 and x_{18} are negatively correlated and $x_4, x_5, x_{12}, x_{13}, x_{14}$, and x_{17} are positively correlated with the dependent variable y .

Table I Correlation Coefficients

| Sl No. | Independent variables | Correlation Coefficient (r) |
|--------|--|-----------------------------|
| 1 | Income between 0- <1000 (x_1) | -0.395 |
| 2 | Income between 1000- 3000 (x_2) | -0.184 |
| 3 | Income between 3000-8000 (x_3) | 0.256 |
| 4 | Income greater than 8000 (x_4) | 0.341 |
| 5 | Average household size (x_5) | 0.456 |
| 6 | Percentage of persons below 5 yrs (x_6) | -0.011 |
| 7 | Percentage of persons between 5 to 20 yrs (x_7) | -0.125 |
| 8 | Percentage of persons between 21 to 50 yrs (x_8) | -0.085 |
| 9 | Percentage of persons above 50 yrs (x_9) | -0.226 |
| 10 | Percentage of Males (x_{10}) | -0.077 |
| 11 | Percentage of Females (x_{11}) | 0.077 |
| 12 | Percentage of automobile availability (x_{12}) | 0.489 |
| 13 | Percentage of persons employed (x_{13}) | 0.763 |
| 14 | Percentage of students (x_{14}) | 0.718 |
| 15 | Percentage of married people (x_{15}) | 0.194 |
| 16 | Percentage of single persons (x_{16}) | -0.213 |
| 17 | Percentage of pucca type of dwelling (x_{17}) | 0.548 |
| 18 | Percentage of medium type of dwelling (x_{18}) | -0.55 |

Multicollinearity:

It occurs when there is a linear relationship among one or more of the independent variables. If one of the independent variable is regressed on the other independent variables and the resulting $R^2 = 1.0$, then the matrix of intercorrelations among the independent variables is singular and there exists no unique solution for the regression coefficients. The presence of multicollinearity makes the regression estimates unstable. A correlation matrix shows the correlation between each pair of variables. The diagonal of the matrix has values of 1 because a variable always has a perfect correlation. The magnitude of the correlation coefficient determines the strength of the correlation. The guideline below helps to determine the type of correlation between the variables:

- $0 < |r| < 0.3$ weak correlation
- $0.3 < |r| < 0.7$ moderate correlation
- $|r| > 0.7$ strong correlation

It can be seen from the Table II, that correlation between the selected explanatory variables are only moderate correlation.

So in order to offset the error due to multicollinearity, it is always better to avoid the combination of the independent variables having high correlation value.

Thus taking into account the collinearity coefficient of the dependent variable with the independent variable and also the presence of multicollinearity, eight explanatory variables were selected. Only the significant and moderately correlated explanatory variables were selected for the model formulation. The selected explanatory variables are listed below:

- Income between 0- <1000 (x_1)
- Income greater than 8000 (x_4)
- Average household size (x_5)
- Percentage of automobile availability (x_{12})
- Percentage of persons employed (x_{13})
- Percentage of students (x_{14})
- Percentage of pucca type of dwelling (x_{17})
- Percentage of medium type of dwelling (x_{18})

Table II Correlation Matrix of selected explanatory variables

| | y | x_1 | x_4 | x_5 | x_{12} | x_{13} | x_{14} | x_{17} | x_{18} |
|----------|--------|--------|-------|-------|----------|----------|----------|----------|----------|
| y | 1 | | | | | | | | |
| x_1 | -0.395 | 1 | | | | | | | |
| x_4 | 0.341 | -0.468 | 1 | | | | | | |
| x_5 | 0.456 | 0.157 | -0.12 | 1 | | | | | |
| x_{12} | 0.489 | -0.219 | 0.429 | 0.248 | 1 | | | | |
| x_{13} | 0.763 | -0.129 | 0.07 | 0.507 | 0.184 | 1 | | | |
| x_{14} | 0.718 | -0.198 | 0.048 | 0.458 | 0.155 | 0.524 | 1 | | |
| x_{17} | 0.548 | -0.47 | 0.469 | 0.047 | 0.352 | 0.169 | 0.381 | 1 | |
| x_{18} | -0.55 | 0.47 | -0.47 | -0.05 | -0.36 | -0.17 | -0.376 | -0.999 | 1 |

Developing the multiple regression equations:

The statistical technique employed for finding the best regression estimates was the backward elimination method. The multiple linear regression analysis of the independent variables were performed using the Microsoft excel. Using this tool, different combinations of the independent variables were regressed to find out the most accurate and suitable regression model. The regression model having highest R, R^2 and Adjusted R^2 value, minimum standard error of estimate, low significance F value and low p value for the coefficients

of independent variables and y intercept was selected as the best model using the regression analysis. The regression model consisting of the four explanatory variables that is percentage of automobile availability, percentage of persons employed, percentage of students and percentage of pucca type of dwelling was found as the most suitable regression model.

The predictive equation from the multiple regression model is

$$y = -28.027 + (0.277 \times x_{12}) + (1.592 \times x_{13}) + (1.447 \times x_{14}) + (0.179 \times x_{17})$$

Where,

y = Trips produced from the residential areas in the medium sized towns on Kerala

x_{12} = Percentage of automobile availability

x_{13} = Percentage of persons employed

x_{14} = Percentage of students

x_{17} = Percentage of pucca type of dwelling

The first term in the prediction equation (-28.027) is a constant that represents the predicted criterion value when both predictors equal zero. The values of 0.277, 1.592, 1.447 and 0.179 represent regression weights or regression coefficients.

Trip will increase on an average by 0.277, 1.592, 1.447 and 0.179 trips per day for each 1% increase in the Percentage of automobile availability, Percentage of persons employed, Percentage of students and Percentage of pucca type of dwelling respectively.

The summary output of the selected regression model is given in the Table III, IV, and V. In the formulated trip production model regression statistics, the value R is a measure of the correlation between the observed value the predicted value of the criterion variable. For this model it has a correlation of 0.9372. This shows that there is a high correlation between the observed and predicted value.

The coefficient of determination is the square of the correlation coefficient (R^2). The R-squared of the regression is the fraction of the variation in the dependent variable that is accounted for (or predicted) by the independent variables. The obtained coefficient of determination (R^2) value is 0.8784, which denotes that 87.84% of the trip produced is influenced by the variation in the percentage of automobile availability, percentage of persons employed, percentage of students and by the percentage of pucca type of dwelling while 12.16% is explained by other factors.

Adjusted R Square value takes into account the number of variables in the model and the number of observations our model is based on. This Adjusted R Square value gives the most useful measure of the success of the model. The obtained adjusted R^2 value is 0.8590, which means that 85.9% of the trip produced are influenced by the percentage of automobile availability, percentage of persons employed, percentage of students and by the percentage of pucca type of dwelling and these are the independent variable that affect the trips produced to the greatest extend or is the most significant variable when compared to the rest.

Table III: Regression Statistics

| | |
|-------------------|--------|
| Multiple R | 0.9372 |
| R Square | 0.8784 |
| Adjusted R Square | 0.859 |
| Standard Error | 5.8842 |
| Observations | 30 |

Table IV ANOVA test results

| | df | SS | MS | F | Significance F |
|------------|----|---------|--------|--------|----------------|
| Regression | 4 | 6253.38 | 1563.3 | 45.153 | 4.36E-11 |
| Residual | 25 | 865.59 | 34.623 | | |
| Total | 29 | 7118.97 | | | |

Table V Regression coefficients

| | Coefficients | Standard Error | t Stat | P-value | Lower 95% | Upper 95% |
|-----------------|--------------|----------------|--------|----------|-----------|-----------|
| Intercept | -27.456837 | 7.5192 | -3.652 | 0.001264 | -42.976 | -11.938 |
| X ₄ | 0.247103 | 0.2294 | 1.077 | 0.292103 | -0.226 | 0.721 |
| X ₁₂ | 0.247566 | 0.0846 | 2.926 | 0.007396 | 0.073 | 0.422 |
| X ₁₃ | 1.58137 | 0.2589 | 6.109 | 0.000003 | 1.047 | 2.116 |
| X ₁₄ | 1.522394 | 0.4056 | 3.754 | 0.00098 | 0.685 | 2.359 |
| X ₁₇ | 0.151125 | 0.0624 | 2.422 | 0.023348 | 0.022 | 0.28 |

The standard error of the model, which is the standard deviation of residuals, indicates the degree of variation on the data about the regression line established that is, the error we would expect between the predicted and actual dependent variable. The standard error of the regression model is 5.8842. This means that, the expected error for trip production predicted is off by 5.8842 trips. The error was a comparatively small when the sample size was considered.

From the Table IV the Significance of F value indicates the probability that the Regression output could have been obtained by chance. A small Significance of F confirms the validity of the Regression output. Since the obtained significance of F value was 4.36139E-11, it means that there was only a 4.36139E-09 % chance that the regression output was merely a chance occurrence. Thus increasing the overall accuracy and significance of the formulated model.

The p-value is a percentage and it tells you how likely it is that the coefficient for that independent variable emerged by chance and does not describe a real relationship. A p-value of 0.05 means that there is a 5% chance that the relationship emerged randomly and a 95% chance that the relationship is real. It is generally accepted practice to consider variables with a p-value of less than 0.1 as significant, though the only basis for this cutoff is convention. The lower the p-Value, the higher the likelihood that that coefficient or Y-Intercept is valid. From the Table V the p-value for the coefficient of percentage of automobile availability, percentage of persons employed percentage of students and percentage of pucca type of dwelling was 0.001, 0.002, 0.0000021, 0.001 and 0.004 respectively. This indicates that there was only a minor chance that the result occurred by chance. Hence the accuracy of the model increases to a greater percentage.

B. Model Validation

Model validation is a procedure that is used to test whether a model is “fit-for purpose”. Model validity is the stability and reasonableness of the regression coefficients, the plausibility and usability of the regression function and ability to generalize inference drawn from the regression analysis. Model validation is an important step in the modeling process and helps in assessing the reliability of models before they can be used in decision making. For the model validation, the testing set comprising of 20 wards was used. These set of data are new data which are different from

the data taken for model formulation. There are five common approaches that can be implemented to evaluate how well the regression model estimates match the observed data.

1) **Absolute difference:** This method is proceeded by calculating the actual difference, i.e. Estimated - Observed. The absolute difference obtained during the validation process lies within the range of -8 to + 7. Since the absolute difference of the formulated model was within a range of -11 to + 9.6, we can say that not only was the absolute difference of the validation process within the limit, it was less than the formulated model. Thus the formulated model is valid for predicting the trips produced.

2) **Relative difference:** It can be expressed as a percentage difference or as a ratio. The percentage difference and the ratio were within a range of -10 to +14% and 0.9 to 1.14 respectively. Since the percentage difference and the ratio of the formulated model were within a range of -16 to + 28 % and 0.8 to 1.17, we can say that not only was the relative difference of the validation process within the limit, it was less than the formulated model. Thus increasing the accuracy of the formulated model for predicting the future trips.

3) **Correlation analysis:** It determines the degree to which the variables are related, i.e. how well the estimating equation actually describes the relationship. In the case of model validation, we determine the degree to which observed and estimated values are related. The most commonly used measure of correlation is the coefficient of determination R², which describes the amount of variation in the dependent variable which is explained by the regression equation. R² can range from 0 to 1, with a value of 0 for no correlation and 1 for perfect correlation. The predicted R² was 0.9, which indicated that there was a high degree of correlation between observed and estimated values.

4) **Variance:** Statistical measures can be calculated which measure the variance between observed and estimated values. The most common measure for validation purposes is the Percent Root Mean Square Error (RMSE). The RMSE value obtained during the model validation was 5.35, whereas the RMSE value obtained for the formulated regression model was 5.88. Hence we can say the both the RMSE value are almost similar and they value obtained from the application of the statistical equation was less than the formulated models RMSE.

5) **Graphical diagnosis of model validation:** Plotting of diagnostic graph is another technique used to validate the model by showing the deviations between modeled and observed trips.

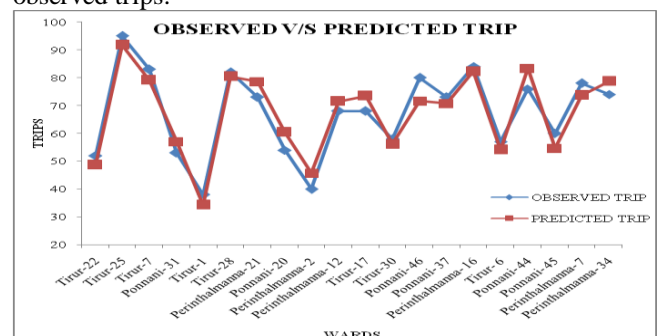


Fig .3 Observed trips versus Predicted trips

It can be seen from the observed trips versus predicted trips graph that

the deviation between the two trips is very less and they almost coincide with each other. This graph indicated the strong validity of the regression model and that the predicted trips were almost accurate.

Thus taking into account the results obtained from the above approaches that was implemented, it can be concluded that the regression model that was formulated is valid and suitable for forecasting the future trips produced from the residential land use in medium sized towns of Kerala.

VI. CONCLUSION AND RECOMMENDATIONS

In this study a trip production model was developed using the multiple linear regression analysis. This regression model would be able to forecast the number of trips produced from the residential land use in medium sized towns of Kerala. The selection of the study area for the model development was such that they satisfy certain criteria so as to represent the majority of towns in Kerala. Several related studies have highlighted the influence of a number of independent variables on the trips produced. The selection of the independent variable for the study was based on the review of these studies and also based on its influence on the dependent variable. From regression analysis it was found that certain explanatory variables were found to have a greater influence on the trips produced from the residential land use when compared to the others.

The significance of this paper lies in the fact that many of the developed trip production models of the past studies have a great dependency on the land bearings and local conditions of the study area and thus limiting its applications in all places. A model forecasting the trips produced from the residential land use of medium sized towns in Kerala would be great aid in the transportation network planning, as not many prominent studies as been conducted in Kerala relating to the forecasting of trip productions based on the residential land use. This study as also tried to include a number of varied independent variables and analyze their effect on the dependent variable. Due to time and cost constraints, only a certain percentage of the data was collected as the sample. Another limitation is the assumptions in the multiple regression analysis. Out of the results and data analysis of this study it can be recommended that the further accuracy of the model can be obtained by increasing the sample size used for the model development. The inclusion of more number of independent variables would also aid in the further research of their effect on the number of trips produced from a residential land use.

ACKNOWLEDGMENT

The authors are grateful to many persons who provided assistance with this paper and the study upon which it draws. We are thankful to the staff of the Town and Country Planning Department, Malappuram, for their contributions to this study. We would also like to extend our sincere thanks to the faculty of Department of Civil Engineering at Rajiv Institute of Technology, Kottayam for their valuable support during the making of this paper.

REFERENCES

- [1] Olugbenga Joseph and Oluyemisi Opeyemi, "Regression Model of Household Trip Generation of Ado-Ekiti Township in Nigeria,"

- European Journal of Scientific Research, ISSN 1450-216X Vol.28 , no.1, EuroJournals Publishing, Inc. 2009, , pp.132-140.
- [2] William J. Fogarty, "Trip Production Forecasting Models for Urban Areas," Transportation Engineering Journal © ASCE, Vol. 102, No. 4, November 1976, pp. 831-845.
- [3] Michael G. McNally, "The Four Step Model," Institute of Transportation Studies University of California, 2007.
- [4] Kevin B. Modi, L. B. Zala, T. A. Desai, and F. S. Umrigar, "Transportation Planning Models," National Conference on Recent Trends in Engineering & Technology, May 2011.
- [5] Charles L. Purvis, Miguel Iglesias, and Victoria A. Eisen, "Incorporating Work Trip Accessibility in Non-Work Trip Generation Models in the San Francisco Bay Area," Paper submitted to the Transportation Research Board for presentation at the 75th Annual Meeting, January 1996.
- [6] Nonito M. Magdayojr, "Study on the Application of Trip Generation Analysis for Residential Condominium Developments in Metro Manila," Final Paper, Undergraduate Research Program in Civil Engineering, march 2008
- [7] John S. Miller, P.E.Lester A. Hoel, P.E. Arkopal K. Goswami, and Jared M. Ulmer, "Borrowing Residential Trip Generation Rates," Journal of Transportation Engineering © ASCE, February 2006, pp. 105-113.
- [8] Papacostas C.S. and Prevedouros P.D., "Transportation Engineering and Planning," SI Edition, Prentice-Hall Inc Singapore, 2005.
- [9] Abdul Khalik Al-Taei and Amal M. Taher, "Prediction Analysis of Trip Production Using Cross-Classification Technique," Al-Rafidain Engineering, vol.14, no.4, 2006.
- [10] Matthew Femal, "Improving Trip Generation Equations," Thesis report, School of Engineering and Applied Science, University of Virginia, 2010.
- [11] Michael Anderson and Justin P. Olander, "Evaluation of Two Trip Generation Techniques for Small Area Travel Models," Journal of Urban Planning and Development © ASCE, vol. 128, no. 2, June 2002, pp. 77-88.
- [12] Valerian Kwigizile and Hualiang HarryTeng, "Comparison of Methods for Defining Geographical Connectivity for Variables of Trip Generation Models" ,Journal of Transportation Engineering © ASCE , vol. 135, no. 7, July 2009, pp. 454-466.

AUTHOR PROFILE



Dr. Padmini A.K. is working as Professor and HOD in the Department of Civil Engineering at Rajiv Gandhi Institute of Technology (RIT), Kottayam, Kerala. She has obtained her B.Tech in Civil Engineering from the Calicut University. She received her M.Tech and PhD degree from IIT, Madras. She has published several papers in various reputed Journals and National Conferences. She has experience in research and development from 1996. She has life membership of ICI and ISTE .She has a teaching experience of 27 years in various reputed Engineering Colleges. Her area of research includes durable construction and transportation planning.



Mr. Abdul Malik K.V. graduated from the National Institute of Technology (NIT), Calicut, Kerala in Civil Engineering. He did his post graduation in Town Planning with Institute of Town Planners, India. He has published his works in journals and national conferences. Presently he is working as Town Planner in Town and Country Planning Department, Government of Kerala. He has a combined experience of 22 years in the field. His area of interest is infrastructure financing and development.



Ms. Leena Samuel Panackel has obtained her B.Tech in Civil Engineering from Cochin University of Science and Technology (CUSAT) , Kerala. Presently she is pursuing her M.Tech from Rajiv Gandhi Institute Technology (RIT), Kottayam, Kerala. Her area research is Transportation Planning.