

Thrust Bearing Governed Clinker Extraction System in Producer Gas Plant

Discontinuity of operation of the plant. This problem is not encountered in this two stage process. In this process, the fuel is heated slowly in the distillation chamber (first stage) and low temperature tar is produced, and the yield of tar is also higher. This tar being a light tar is easily carried by the gas as tar for without setting in the pipelines.

This extended shaft gasifier, consists of a distillation retort, super imposed above the main shell of the conventional single stage gasifier. In this gasifier, coal is gasified in the first stage (distillation zone) by passing the gas produced in the second stage (gasificative zone) through the distillation chamber. This gas degasifies the incoming coal with the sensible heat and comes out of the distillation gas at temperature of about 120^oc to 150^o c which is known as low temperature carbonization gas (L.T.C). The first stage consists of the coal drying zone, coal preheating zone and the distillation zone.

In the second stage; the Semi coke produced in the first stage is completely gasified by air saturated with steam. The second stage consists of the preheating zone, reduction zone, oxidation zone, ash zone and ash cooling zone.

The LTC gas from the two top off takes of the producer is through a water seal pot where gas is cooled and cleaned by water sprays and the thick tar (tar mixed with coal dust) settles. The LTC gas, free from coal dust so produced goes to the gas collecting main gas header from where it is distributed to the gas consuming furnaces.

One pressure controller maintain a constant desired pressure in the gas collecting main by regulating the air flow to the producer. It is recommended that non coking bituminous coal having a swelling index of 0.5 BS (max) and ash fusion temperature of 1200^o c (min) should be selected as feed stock for gasification.

As the fuel travel down words by gravity, it gets heated gradually due to exchange of heat from the hot gas moving up words. In the distillation zone, volatile matters, in the fuel are vaporized and transferred into the out going hot producer gas adding to its calorific value due to the pressure of hydrocarbons. The heat released in the oxidation zone considerably cooled down in the primary and secondary reduction zones due to the endothermic reactions. The thickness of the primary and secondary reduction zones are supposed to be of the order of 300mm 450mm respectively. The oxidation zone has the highest temperature due to the exothermic reaction and is believed to be comparatively a thin one with 75-150 mm thickness.

II. THRUST BEARING TYPES

Thrust ball bearings

Single direction

With flat housing washer

With sphered housing washer and seating ring

Double direction

With flat housing washer

With sphered housing washer and seating ring

Angular contact thrust ball bearings

Single direction

Double direction

Cylindrical roller thrust bearings

Needle roller thrust bearings

Spherical roller thrust bearings

Taper roller thrust bearings


III. SELECTION OF BEARING TYPES

Each type of bearing displays characteristic properties which depend on its design and which make it more, or less, appropriate for a given application. Important criteria to be observed when designing a bearing arrangement- load carrying capacity and life, friction, permissible speeds, bearing internal clearance or preload, lubrication, sealing etc.

IV. METHODOLOGY

In order to eliminate problems occurring due to guide roller, it has been replaced by the thrust bearing which is a type of single direction with flat housing washer. This improves productivity by reducing break down time, reducing total man power required & by reducing maintenance cost.

Idea: Replacing guide roller and installation of Thrust bearing system.

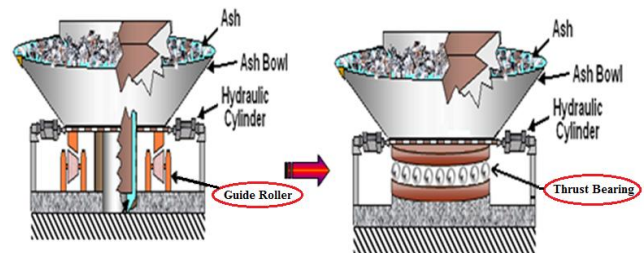

V. ANALYSIS

Following points were of consideration before installation of thrust bearing.

1. Hydraulic power pack; used to move guide roller; performance was not efficient.
2. Hydraulic pressure was high for the movement of ash bowl.
3. We were facing the manpower loss.
4. Guide roller maintenance cost was high.

In the process of producer gas production; clinker/ash is formed as a waste material. This clinker is removed by equipment named as Ash Bowl which rotates on the "Guide Roller" by the application of hydraulic pressure. This process having following problems:

1. Formation of Big size clinker which require excess hydraulic pressure.
2. Guide Roller is unable to scatter the hydraulic pressure equally in all the direction on the Ash Bowl to crush the clinker.
3. More hydraulic pressure is required for the movement of ash bowl.
4. More time is required to change the guide roller.

VI. RESULTS & DISCUSSION

Major Findings

1. Reduced break down time.
2. Reduced hydraulic cylinder working pressure.
3. Reduced total man power required.
4. Reduced maintenance cost.

Thrust Bearing

Guide Roller



Brake down time - 0 Hours/month Brake down time – 142
Hours/month
Hydraulic Cylinder
Hydraulic Cylinder
Working Pressure – 90 Kg/cm²
Working Pressure - 120 Kg/cm²
Total Man Power
Total Man Power
Required - 0.5 Man Hour / Day
Required - 8 Man Hour / Day

ADVANTAGES

By applying thrust bearing; following advantages have been obtained:

- Reduced break down time.
- Reduced Hydraulic Cylinder Working Pressure – 90 Kg/cm²
- Reduced Total Man Power Required – ½ Man Hour / Day
- Reduced power consumption.
- Saved total maintenance cost = Rs. 3775/day
- Improved hydraulic power pack life.

SUMMARY & CONCLUSION

By replacing the guide roller & using the thrust bearing; we have obtained following major benefits:

1. Reduced break down time.
2. Reduced hydraulic Cylinder Working Pressure.
3. Reduced total man power required.
4. Reduced maintenance cost.

REFERENCES

1. Jindal Steel & Power Ltd., Kharsia Road Raigarh, (C.G.) Citation from books:
2. SKF general catalogue 4000/IE, Reg. 47.23000.1991.02

AUTHORS PROFILE



Corresponding Author: Ram Prasad Verma Designation: ME Scholar **Institute: Chouksey Engineering College Masturi Road, NH-200, Bilaspur (C.G.)**



Co-author Prof. Manish Verma H.O.D., Department of Mechanical Engineering, CEC Bilaspur **Institute: Chouksey Engineering College Masturi Road, NH-200, Bilaspur (C.G.)**



Co-author, Dr. Arvind Dewangan, Associate Professor in Department of Civil Engineering, Haryana College of Technology & Management, Technical Campus KAITHAL. His highest academic qualification is PhD in Mining & Geological Engineering. He has 12years of experience in teaching and research. He has published 41 papers in International and National journals and won more than 15 times NATIONAL LEVEL ESSAY COMPETITION.