

# Performance Optimized DCT Domain Watermarking Technique with JPEG


Jyoti Rani, Tazeem Ahmad Khan

**Abstract**— Image compression is a widely addressed researched area. Many compression standards are in place. But still here there is a scope for high compression with quality reconstruction. The JPEG standard makes use of Discrete Cosine Transform (DCT) for compression. The introduction of the wavelets gave different dimensions to the compression. This paper aims at the analysis of compression using DCT and Wavelet transform by selecting proper threshold method, better result for PSNR have been obtained. Extensive experimentation has been carried out to arrive at the conclusion. Here we used simulation through using MATLAB simulator.

**Index Terms**— Discrete Cosine Transform (DST), Wavelet transform, PSNR, Image compression.

## I. INTRODUCTION

Compressing an image is significantly different than compressing raw binary data. Of course, general purpose compression programs can be used to compress images, but the result is less than optimal. This is because images have certain statistical properties which can be exploited by encoders specifically designed for them. Also, some of the finer details in the image can be sacrificed for the sake of saving a little more bandwidth or storage space. This also means that lossy compression techniques can be used in this area. Uncompressed multimedia (graphics, audio and video) data requires considerable storage capacity and transmission bandwidth. Despite rapid progress in mass-storage density, processor speeds, and digital communication system performance, demand for data storage capacity and data-transmission bandwidth continues to outstrip the capabilities of available technologies. The recent growth of data intensive multimedia-based web applications have not only sustained the need for more efficient ways to encode signals and images but have made compression of such signals central to storage and communication technology. For still image compression, the Joint Photographic Experts Group' or JPEG standard has been established by ISO (International Standards Organization) and IEC (International Electro-Technical Commission). The performance of these coders generally degrades at low bit-rates mainly because of the underlying block-based Discrete Cosine Transform (DCT) Cosine Transform (DCT) scheme.

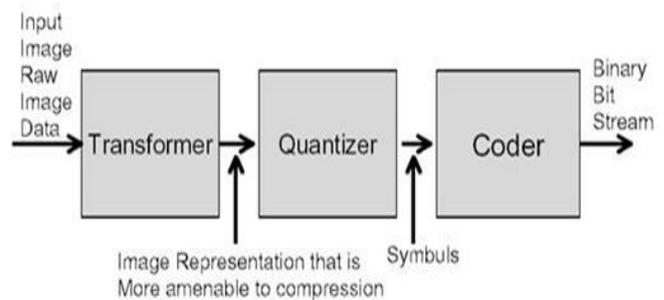

**Fig.1: Typical Image Compression System**

Types of Compression Systems:

There are two types of compression systems

- Lossy compression system
- Lossless compression system

### Lossy Compression System

Lossy compression techniques can be used in images where some of the finer details in the image can be sacrificed for the sake of saving a little more bandwidth or storage space.

### Loss less compression system

Lossless Compression System which aim at minimizing the bit rate of the compressed output without any distortion of the image. The decompressed bit-stream is identical to original bit-stream.

### A. Introduction to Transformation

Transform coding constitutes an integral component of contemporary image/video processing applications. Transform coding relies on the premise that pixels in an image exhibit a certain level of correlation with their neighboring pixels. Similarly in a video transmission system, adjacent pixels in consecutive frames show very high correlation. Consequently, these correlations can be exploited to predict the value of a pixel from its respective neighbors. A transformation is, therefore, defined to map this spatial (correlated) data into transformed (uncorrelated) coefficients. Clearly, the transformation should utilize the fact that the information content of an individual pixel is relatively small i.e., to a large extent visual contribution of a pixel can be predicted using its neighbors. A typical image/video transmission system is outlined in Figure 1. The objective of the source encoder is to exploit the redundancies in image data to provide compression. In other words, the source encoder reduces the entropy, which in our case means decrease in the average number of bits required to represent the image. On the contrary, the channel encoder adds redundancy to the output of the source encoder in order to enhance the reliability of the transmission.

**Manuscript published on 30 July 2014.**

\*Correspondence Author(s)

**Jyoti Rani**, M. Tech. Scholar, Deptt.ECE, Al-Falah University, Faridabad, Haryana, India.

**Mr. Tazeem Ahmad Khan**, Asst. Prof., Deptt. ECE, Al-Falah University, Faridabad, Haryana, India.

© The Authors. Published by Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP). This is an open access article under the CC-BY-NC-ND license <http://creativecommons.org/licenses/by-nc-nd/4.0/>

In the source encoder exploits some redundancy in the image data in order to achieve better compression. The transformation sub-block de correlates the image data thereby reducing *inter pixel redundancy*. The transformation is a lossless operation, therefore, the inverse transformation renders a perfect reconstruction of the original image. The quantize sub-block utilizes the fact that the human eye is unable to perceive some visual information in an image. Such information is deemed redundant and can be discarded without introducing noticeable visual artifacts.

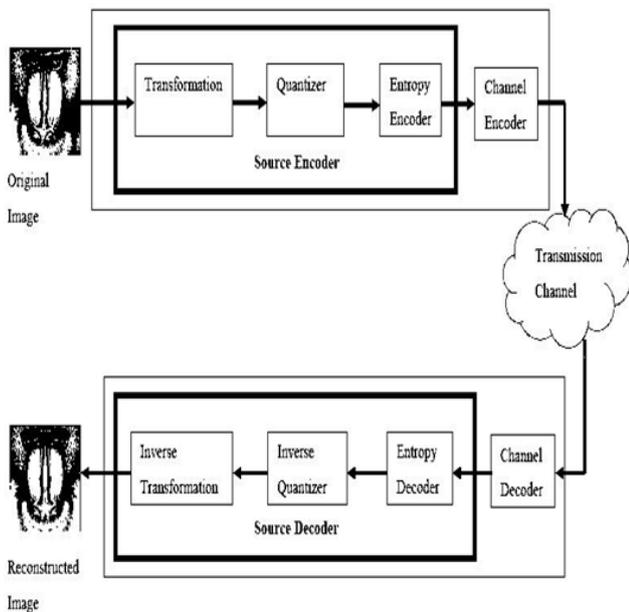


Fig.2 Components of Typical Image/Video Transmission System

Such redundancy is referred to as psycho visual redundancy. This idea can be extended to low bit-rate receivers which, due to their stringent bandwidth requirements, might sacrifice visual quality in order to achieve bandwidth efficiency. This concept is the basis for rate distortion theory, that is, receivers might tolerate some visual distortion in exchange for bandwidth conservation. The entropy encoder employs its knowledge of the transformation and quantization processes to reduce the output number of bits required to represent each symbol at the quantize. Discrete Cosine Transform (DCT) has emerged as the de-facto image transformation in most visual systems. DCT has been widely deployed by modern video coding standards, for example, MPEG, JVT etc.

II. ERROR METRICS

Two of the error metrics used to compare the various image compression techniques are the Mean Square Error (MSE) and the Peak Signal to Noise Ratio (PSNR) to achieve desirable compression ratios. The MSE is the cumulative squared error between the compressed and the original image, whereas PSNR is a measure of the peak error. The mathematical formulae for the two are :

$$MSE = \frac{1}{MN} \sum_{y=1}^M \sum_{x=1}^N [I(x,y) - I'(x,y)]^2 \quad \text{---(1)}$$

$$PSNR = 20 * \log_{10} (255 / \text{sqrt}(MSE)) \quad \text{---(2)}$$

where I(x,y) is the original image, I'(x,y) is the approximated version (which is actually the decompressed image) and M,N are the dimensions of the images. A lower value for MSE means lesser error, and as seen from the inverse relation between the MSE and PSNR, this translates to a high value of PSNR. Logically, a higher value of PSNR is good because it means that the ratio of Signal to Noise is higher. Here, the 'signal' is the original image, and the 'noise' is the error in reconstruction. So, if you find a compression scheme having a lower MSE (and a high PSNR), you can recognise that it is a better one.

A. Data Compression Transformation

Data compression ratio, also known as compression power, is used to quantify the reduction in data-representation size produced by data compression. The data compression ratio is analogous to the physical compression ratio it is used to measure physical compression of substances, and is defined in the same way, as the ratio between the uncompressed size and the compressed size. Thus a representation that compresses a 10MB file to 2MB has a compression ratio of 10/2 = 5, often notated as an explicit ratio, 5:1 (read "five to one"), or as an implicit ratio, 5X. Note that this formulation applies equally for compression, where the uncompressed size is that of the original. Sometimes the space savings is given instead, which is defined as the reduction in size relative to the uncompressed size. Thus a representation that compresses 10MB file to 2MB would yield a space savings of 1 - 2/10 = 0.8, often notated as a percentage, 80%. For signals of indefinite size, such as streaming audio and video, the compression ratio is defined in terms of uncompressed and compressed data rates instead of data sizes. When the uncompressed data rate is known, the compression ratio can be inferred from the compressed data rate.

B. Mean Square Error (MSE)

Mean square error is a criterion for an estimator: the choice is the one that minimizes the sum of squared errors due to bias and due to variance. The average of the square of the difference between the desired response and the actual system output. As a loss function, MSE is called squared error loss. MSE measures the average of the square of the "error. The MSE is the second moment (about the origin) of the error, and thus incorporates both the variance of the estimator and its bias. For an unbiased estimator, the MSE is the variance. In an analogy to standard deviation, taking the square root of MSE yields the root mean squared error or RMSE. Which has the same units as the quantity being estimated for an unbiased estimator, the RMSE is the square root of the variance, known as the standard error.

$$MSE = \frac{1}{mn} \sum_{i=0}^{m-1} \sum_{j=0}^{n-1} ||I(i,j) - K(i,j)||^2$$

Where m x n is the image size and I(i,j) is the input image and K(i,j) is the retrieved image.



**C. Peak Signal-to-Noise Ratio (PSNR)**

It is the ratio between the maximum possible power of a signal and the power of corrupting noise .Because many signals have a very wide dynamic range, PSNR is usually expressed in terms of the logarithmic decibel scale. The PSNR is most commonly used as a measure of quality of reconstruction in image compression etc. It is most easily defined via the mean squared error (MSE) which for two m×n monochrome images I and K where one of the images is considered noisy.



The PSNR is defined as:

$$PSNR = 10 \cdot \log_{10} \left( \frac{MAX_I^2}{MSE} \right) = 20 \cdot \log_{10} \left( \frac{MAX_I}{\sqrt{MSE}} \right)$$

Here, MAX<sub>i</sub> is the maximum possible pixel value of the image. When the pixels are represented using 8 bits per sample, this is 255. More generally, when samples are represented using linear PCM with B bits per sample, MAX<sub>i</sub> is 2<sup>B</sup>-1. Typical values for the PSNR in Lossy image and video compression are between 30 and 50 dB, where higher is better. PSNR is computed by measuring the pixel difference between the original image and compressed image. Values for PSNR range between infinity for identical images, to 0 for images that have no commonality. PSNR decreases as the compression ratio increases for an image.

**III. DISCRETE COSINE TRANSFORM (DCT)**

The discrete cosine transform (DCT) is a technique for converting a signal into elementary frequency components. Like other transforms, the Discrete Cosine Transform (DCT) attempts to de correlate the image data. After de correlation each transform coefficient can be encoded independently without losing compression efficiency.

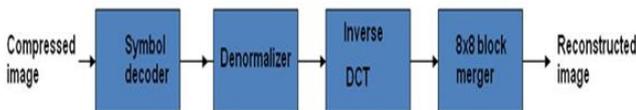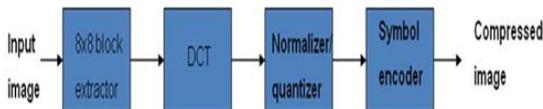


**Fig.3 Image Compression using DCT**

**A. Proposed DCT Algorithm:**

- The following is a general overview of the JPEG process.
- The image is broken into 8x8 blocks of pixels.
- Working from left to right, top to bottom, the DCT is applied to each block.
- Each block is compressed through quantization.
- The array of compressed blocks that constitute the image is stored in a drastically reduced amount of space.
- When desired, the image is reconstructed through

decompression, a process that uses the inverse Discrete Cosine Transform (IDCT).

**B. Watermarking using DCT**

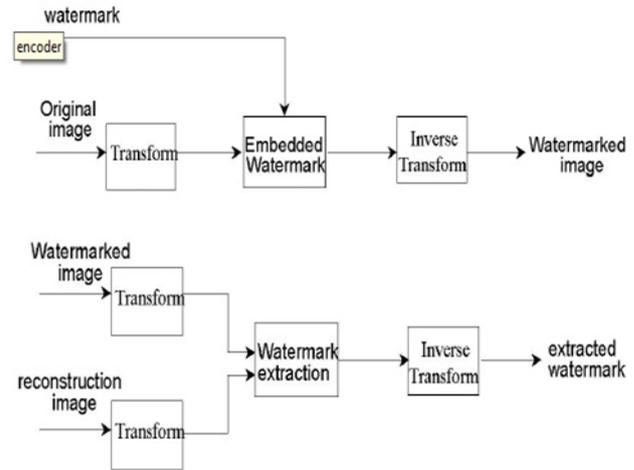

**Fig: 4 Flowchart of Water Marking using DCT**

**C. DCT Domain Watermarking**

For DCT domain code is different after running that code it opens the tab of watermarking using DCT shows in below figure 3.2.2.2

|    |    |    |    |    |    |    |    |
|----|----|----|----|----|----|----|----|
| 1  | 2  | 6  | 7  | 15 | 16 | 28 | 29 |
| 3  | 5  | 8  | 14 | 17 | 27 | 30 | 43 |
| 4  | 9  | 13 | 18 | 26 | 31 | 42 | 44 |
| 10 | 12 | 19 | 25 | 32 | 41 | 45 | 54 |
| 11 | 20 | 24 | 33 | 40 | 46 | 53 | 55 |
| 21 | 23 | 34 | 39 | 47 | 52 | 56 | 61 |
| 22 | 35 | 38 | 48 | 51 | 57 | 60 | 62 |
| 36 | 37 | 49 | 50 | 58 | 59 | 63 | 64 |

**Fig.5 Middle Frequency Band**

**IV. SIMULATION RESULTS AND DISCUSSION**

Few lines of code which generate the PSNR code and give different PSNR code via we able to compare them  
 res1=questdlg('MethodSelection','SelectOption','BaseWork','ImprovedWork','Improved Work');  
 c11=double (sum('Base Work'));  
 c12=double (sum('Improved Work'));  
 here showing few lines of code which is for Base work and Improved Work, 2D & 3D signal & image considered under Base Work it may be Gray scale or color image, improved work mainly use for 4D signal but if we want to do DCT with CRT including complexity then improved work considered 2D & 3D signal. Steps of Watermarking did using Base work and Improved Work.

- Run the code in MATLAB software version greater than 2010 it may be 2012b or 2013b.


- When run the code it ask to select the signal ( which is 2D, 3D, 4D) Shows in the Figure 1
- Now Select Input Image that is Shows in Figure as Original Image




I. Select Message Image Shows



II. Then Embed Message

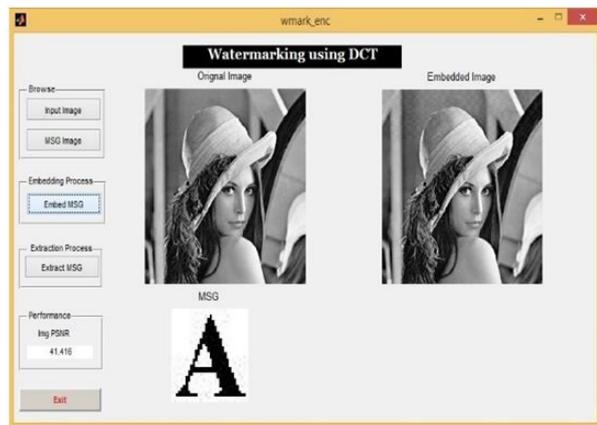

III. Finally Extract the Message

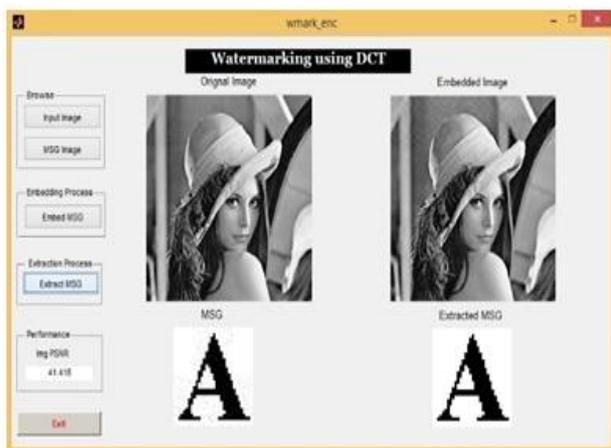

Only with DCT found PSNR Code is 41.416.

## V. CONCLUSION

In this paper, study about Watermarking, implemented using MATB software and Performance analysis. We found watermarking based on DCT & for watermarking of images in the DCT domain for authentication and copyright protection. DCT domain watermarking, we understood the difference of this technique with the help steps of work. As per the our simulation results PSNR is 41.416.

## REFERENCES

1. Digital Image Processing (Pearson Education, Second Edition) By Rafael C. Gonzalez and Richard E.Woods.
2. Digital Image Processing by AthurR.Weak
3. Digital Image Processing using MATLAB (Pearson Education) By Rafael C. Gonzalez, Richard E. Woods and Steven L.Eddins,
4. T Hong LIU , Lin-pei ZHAIIV , Ying GAO, Wen-ming LI", "Image Compression Based on BiorthogonalWavelet Transform", IEEE Proceedings of ISCT2005.
5. De Vore , et al.,n"Image Compression through Wavelet Transform Coding", IEEE Transaction on Information Theory.
6. "A Comparative Study of Image Compression Techniques Based on Svd, Dwt-Svt , Dwt-Dct" ICSCI2008 proceedings pg 494-496.
7. W. Bender, D. Gruhl, N. Morimoto, A. Lu, Techniques for data hiding, IBM Systems J. 35 (3&4) (1996) 313–336.
8. I.J. Cox, J. Kilian, F.T. Leighton, T. Shamoan, Secure spread spectrum watermarking for multimedia, IEEE Trans. Image Process. 6 (12) (Dec. 1997)1673–1687.
9. I.J. Cox, M.L. Miller, A.L. Mckellips, Watermarking as communication with side information, Proc. IEEE 87 (7) (Jul. 1999) 1127–1141. Electronic For You www.digitalwatermarking.com
10. Cox, J.; Miller, M. L.; Bloom, J. A.; Fridrich J. &Kalker T. (2008). Digital Watermarking and Steganography, Morgan Kaufmann Pub., Elsevier Inc.
11. C. C. Chang, P. Tsai and C. C. Lin, "SVD-based digital image watermarking image scheme", Pattern Recognition Letters, vol.26, pp. 1577-1586, 2005.
12. A. A. Mohammad, A. Alhaj and S. Shaltaf, "An improved SVD-based watermarking scheme
13. Lin, S. D. Shie, S. C. , and Guo, J. Y. , "Improving the robustness of DCT-based image watermarking against JPEG compression", Journal of Computer Standards & Interfaces, vol. 32, pp. 54-60, 2010.
14. Jose, S. , Roy, R. C. , and Shashidharan, S. , "Robust Image Watermarking based on DCT-DWT-SVD Method", International Journal of Computer Applications, vol. 58, no. 21, pp. 0975-8887, November 2012.
15. Xijin, W. , Linxiu, F. , "The Application Research of MD5 Encryption Algorithm in DCT Digital Watermarking", International conference on Solid State Devices and Materials Science, Journal of Physics Procedia, vol. 25, pp. 1264-1269, 2012.



16. Tao, B., Dickinson, B., "ADAPTIVE WATERMARKING IN THE DCT DOMAIN", IEEE International Conference on Acoustics, Speech, and Signal Processing, pp. 21-24, 1997.
17. XU, Z. J. , WANG, Z. Z. , and LU, Q. , "Research on Image Watermarking Algorithm based on DCT", 3rd International Conference on Environmental Science and Information Application Technology, Journal of Procedia Environmental Sciences, vol. 10, pp. 1129-1135, 2011.
18. Kashyap, N. , SINHA, G. R. , "Image Watermarking Using 3-Level Discrete Wavelet Transform", I. J. Modern Education and Computer Science, vol. 3, pp. 50-56, 2012.
19. Tomar, V., Mehrotra, D., and Choudhary A., "A Statistical Comparison of Digital Image Watermarking Techniques", Special Issue of International Journal of Computer Applications (0975 – 8887), for 3rd International IT Summit Confluence 2012 - The Next Generation Information Technology Summit.
20. Keyvanpoura, M., Bayat, F. M., "Blind image watermarking method based on chaotic key and dynamic coefficient quantization in the DWT domain", Journal of Mathematical and Computer Modelling, July 2012, In Press.
21. Al-Haj, A., "Combined DWT-DCT Digital Image Watermarking", Journal of Computer Science, vol. 3, no. 9, pp. 740-746, 2007.
22. Pradhan, C., Rath, S., Bisoi, and A. K., "Non Blind Digital Watermarking Technique Using DWT and Cross Chaos", Journal of Procedia Technology, vol. 6, pp. 897-904, 2012.
23. Keyvanpour, M., Bayat, F. M., "Robust Dynamic Block-Based Image Watermarking in DWT Domain", Journal of Procedia Computer Science, vol. 3, pp. 238-242, 2011.
24. [Bhattacharya and Cortesi, 2009b] Bhattacharya, S. and Cortesi, A. (2009b). Ageneric distortion free watermarking technique for relational databases. In Proceedings of the 5th International Conference on Information Systems Security (ICISS '09), pages 252–264, Kolkata, India. Springer LNCS, Volume 5905.
25. [Bhattacharya and Cortesi, 2010] Bhattacharya, S. and Cortesi, A. (2010). Database authentication by distortion-free watermarking. In Proceedings of the 5th International Conference on Software and Data Technologies (ICSFT '10), pages 219–226, Athens, Greece. INSTICC Press.
26. [Cui et al., 2006] Cui, X., Qin, X., Sheng, G., and Zheng, J. (2006). A robust algorithm for watermark numeric relational databases. In Proceedings of the 2010 International conference on Intelligent computing (ICIC '06), pages 810–815, Kunming, China. Springer Lecture Notes in Control and Information Sciences.
27. [Guo et al., 2006a] Guo, F., Wang, J., and Li, D. (2006a). Fingerprinting relational databases. In Proceedings of the 2006 ACM symposium on Applied computing (SAC'06), pages 487–492, Dijon, France. ACM Press.
28. [Guo et al., 2005] Guo, F., Wang, J., Zhang, Z., Ye, X., and Li, D. (2005). An improved algorithm to watermark numeric relational data. In Proceedings of the 6th International
29. Workshop on Information Security applications (WISA '05), pages 138–149, Jeju Island, Korea. Springer LNCS, Volume 3786.
30. [Guo et al., 2006b] Guo, H., Li, Y., Liu, A., and Jajodia, S. (2006b). A fragile watermarking scheme for detecting malicious modifications of database relations. Information Sciences, 176:1350–1378.
31. [Gupta and Pieprzyk, 2009] Gupta, G. and Pieprzyk, J. (2009). Database relation watermarking resilient against secondary watermarking attacks. In Proceedings of the 5th International Conference on Information Systems Security (ICISS '09), pages 222–236, Kolkata, India. Springer LNCS, Volume 5905.
32. [Hacigumus et al., 2002] Hacigumus, H., Iyer, B., and Mehrotra, S. (2002). Providing database as a service. In Proceedings of the 18th International Conference on Data Engineering (ICDE '02), pages 29–38, San Jose, California, USA. IEEE Computer Society.
33. [Halder and Cortesi, 2010a] Halder, R. and Cortesi, A. (2010a). A persistent public watermarking of relational databases. In Proceedings of the 6th International Conference on Information Systems Security (ICISS '10), pages 216–230, Gandhinagar, Gujarat, India. Springer LNCS, Volume 6503.
34. [Halder and Cortesi, 2010b] Halder, R. and Cortesi, A. (2010b). Persistent watermarking of relational databases. In Proceedings of the IEEE International Conference