

Effect of Retrogression and Re-Aging on Fatigue Crack Growth Behavior of Al 7075 Alloy

Sunil Kumar k, P L Srinivasa Murthy,

Abstract: In this activity I used very familiarly known as two steps heat treatment called RRA is applied on AL 7075 alloy to examine the fatigue behavior. this process includes the various stages of heat treatments includes, annealing, high temperature pre-precipitation, artificial aging (T6), retrogression and re-aging. The specimens are initially heated to 473o & then quenched in water medium .the specimens are further heated to 18hr, 22hr, 26hr respectively .after this specimens are heated 230o, 250o, 270o, 290o with different time intervals 7 & 14 min respectively to enhance the strength of the material this process we call it as retrogression and re-aging .after this conducted experiment and came to know that by using RRA method we can increase the strength of the material to maximum extent.

Index Terms: AA 7075alloy, heat treatments, fatigue behavior.

I. INTRODUCTION

High caliber 7xxx course of action aluminum amalgams are consistently used in the division of aeronautics inferable from their features of low thickness, perfect quality, etc. Starting late, analyzes finished to improve a couple of traits (for instance disintegration) of these amalgams including quality by using different techniques have extended altogether [1–3]. The most outstanding procedure used to improve quality in Al-Zn-Mg-Cu amalgams is developing treatment. Quality estimations of 7xxx course of action blends can be extended basically with various warmth treatment frames [4–9]. While 7xxx plan amalgams increment high caliber under the phony developing (T6) conditions, they become astonishingly tricky towards stress disintegration. Henceforth, to equilibrate both mechanical properties and utilization affectability under perfect conditions, 7xxx course of action mixes are treated with retrogression and re-developing (RRA) and high temperature pre-support the shortcoming test was done on R-R Moore exhaustion testing machine in all testing conditions. The test precedent is fixed between the courses. Different weights are associated on the model start from 75% of TS. Bowing weights and torsional stresses cause the guide to bomb in light of exhaustion. In weariness disappointment the breaks start at the focal point of the example, and the dynamically proliferate towards the surface bringing about abrupt disappointment. To gauge number of cycles required to cause weakness disappointment of the example a counter is given. The pressure v/s number of cycles for disappointment

bend is plotted. Tables 2 to 5 demonstrate the estimations of no. of cycles of disappointment. S-N curves of as-cast, 465°C.16h, 465°C.20h, 465°C.24h specimen is shown in graph 1-5 respectively.

1.1 Material

In the trial contemplates, the AA7075 aluminum compound that is usually utilized in the part of room and aviation inferable from its particular weight, high quality, electrical and warm conductivities was utilized in the test thinks about. Concoction creation of the AA7075 amalgam utilized in the exploratory investigations is given in the Table

Element	Weight %
Zn	5.690
Mg	2.074
Cu	1.507
Mn	0.069
Cr	0.244
Ti	0.080
Fe	0.222
Si	0.036
Al	Balance

Table 1-Chemical Composition

1.2 Retrogression and re-aging:

Retrogression and re-maturing is a two stage heat treatment process at first examples are warmed at 473° for 2hours and extinguished in water .at that point examples are warmed to 135° for 18hrs,22hrs,26hrs separately .again examples are warmed to 230°,250°,270°,290 ° for 7min and 14min for 135° .this procedure will improve the strength of the material to more noteworthy degree. but for current study I taken t-6 and RRA treated (473°C -24h-230°C -7min) one retrogression condition ..


Revised Manuscript Received on August 05, 2019.

Sunil Kumar K, Research scholar Dept of Mechanical Engineering, VTU/ R.L. Jalapa Institute of Technology, Doddaballapur (KA), India.

Dr P L Srinivasa Murthy, Dept of Mechanical Engineering, VTU /M.S. Ramaiah Institute of Technology, Bengaluru, India.

II. TEST CONDUCTED

2.1 Fatigue Test:

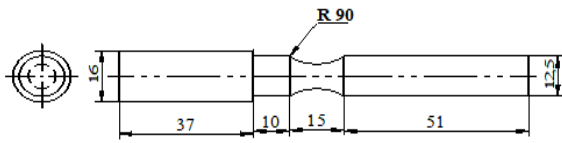

Fatigue Test Specimen

Fig -1 Test Specimen



fig-2 fatigue testing machine

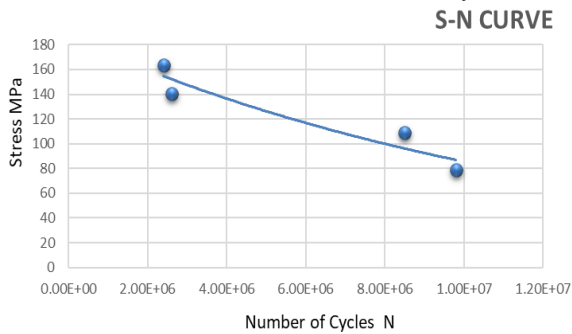


fig-3 Heating Furnace


2.2 Results and Discussion:

As-cast Condition UTS 220 MPa		
%UTS	Stress MPa	No. of cycles for failure
37	78.5	9.8E6
55	109	8.5E6
69	140.5	2.6E6
80	163.5	2.4E6

Table-2 S-N values of as-cast alloy



Graph-1 S-N curve of as-cast alloy

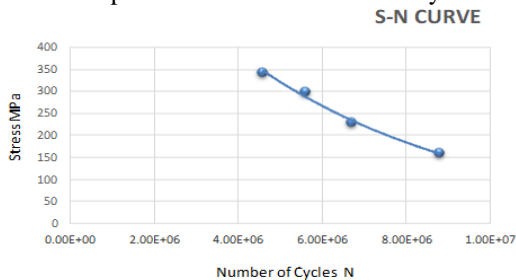


Graph-2 S-N curve of solution treated (18h) alloy

Solution Heat treated at 473°C-18h UTS 450 MPa		
%UTS	Stress MPa	No. of cycles for failure
37	159.5	8.8E7
55	229	6.7E7
69	297.5	5.6E6
80	342.5	4.6E6

Table-3 S-N values of solution treated (18h) alloy

Solution Heat treated at 473°C-22h UTS 470 MPa		
%UTS	Stress MPa	No. of cycles for failure
37	166.5	8.8E7
55	241	6.7E7
69	309.5	5.6E6
80	349.5	4.6E6


Table-4 S-N values of solution treated (22h) alloy

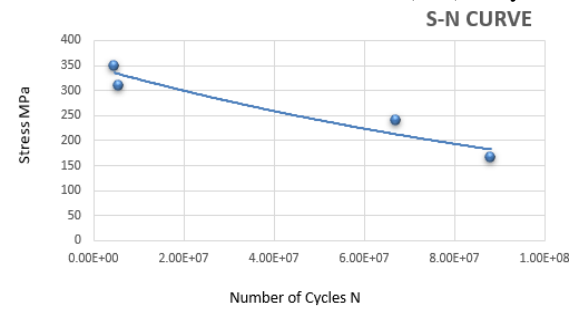

Graph-3 S-N curve of solution treated (22h) alloy

Solution Heat treated at 473°C-26h UTS 500 MPa		
%UTS	Stress MPa	No. of cycles for failure
37	179	8.8E7
55	250	6.7E7
69	325	5.6E6
80	375	4.6E6


Table-5 S-N values of solution treated (26h) alloy

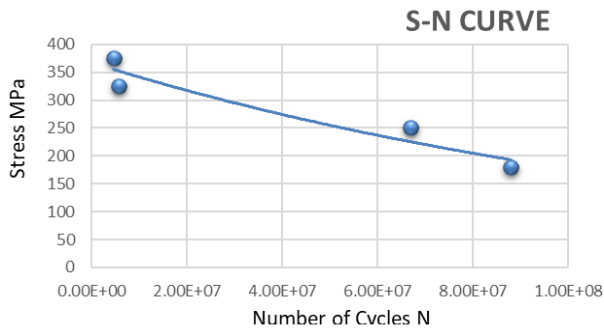

Graph-4 S-N curve of solution treated (26h) alloy

RRA treated (473 ⁰ C -24h-230 ⁰ C -7min)		
UTS 506 MPa		
%UTS	Stress MPa	No. of cycles for failure
37	179.1	8.8E7
55	259	6.7E7
69	332.9	5.6E6
80	389.5	4.6E6

Table-6 S-N values of RRA treated alloy

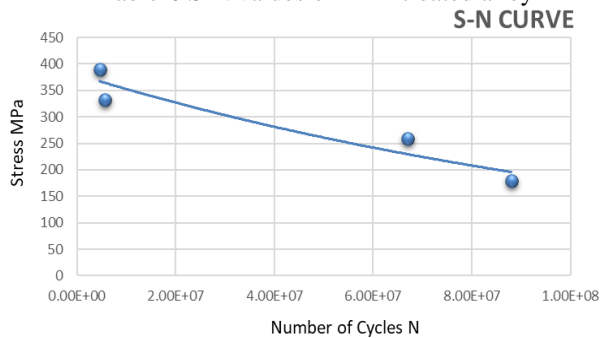

Graph-5 S-N curve of RRA treated alloy

Discussion on Results

The as-cast 7075 alloy exhibited 100 MPa fatigue strength at 5×10^6 cycles and 24 hrs. age hardened and RRA treated alloys have shown the strength approximately 109 and 119MPa respectively. The maximum fatigue strength is observed for the specimen aged for 24 hrs. and retrogressed at 230⁰C for 7 min. This reveals that fatigue strength increases with age hardening time at lower retrogression temp and time. The increase in fatigue strength almost twice when compared with as-cast specimen. This may be due to the presence of casting defects in as-cast specimen.

III. FATIGUE FRACTURE STUDIES

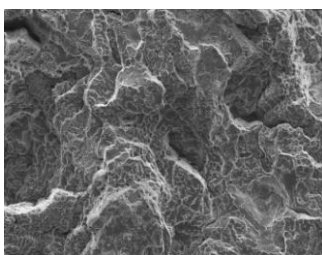


fig-4: Fatigue fractured surface of as-cast specimen

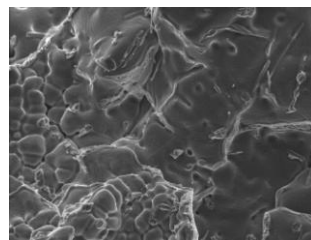


fig-5: Fatigue fractured surface of 473⁰C - 18h

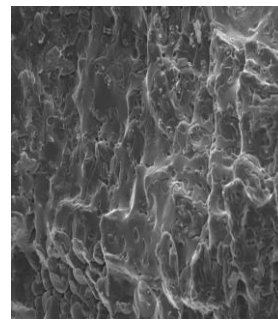


fig-6: Fatigue fractured surface of 473⁰C - 22h specimen

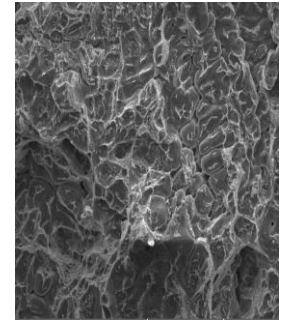


fig-7: Fatigue fractured surface of 473⁰C-26h specimen

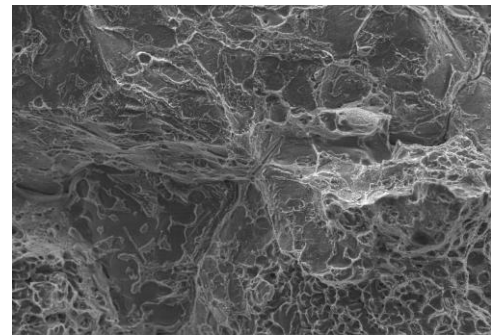


fig-8: fatigue fracture surface of (465⁰C -24h-220⁰C - 5min) treated alloy

Discussion on Results

Fatigue fractured surfaces of as-cast, Solutionization treated and RRA treated alloys are shown in PLATEs from. As-cast alloy photographs have shown severely damaged grains, voids, along with the coarse silicon particles, which could be the reason for reduced fatigue life. Precipitation strengthening of alloy due to heat treatment increased fatigue life of heat-treated alloys the fatigue strength of as-cast alloys is around 90 MPa at 5×10^6 cycles and that of RRA treated for 473⁰C-26 hrs. alloy is max and around 170 MPa. The improvement in fatigue strength of heat-treated alloys could be due to precipitation strengthening of alloying element and the reason for low strength of un heat treated specimen could be due to the presence of casting defects.

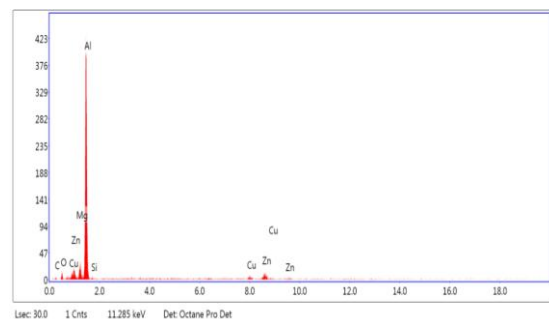


Fig-9 EDS Analysis for as -cast specimen

Effect of Retrogression and Re-Aging on Fatigue Crack Growth Behavior of Al 7075 Alloy

Element	Weight %	Atomic %
C K	13.64	25.69
O K	9.92	14.03
MgK	4.82	4.48
AlK	62.05	52.03
SiK	0.91	0.74
CuK	2.58	0.92
ZnK	6.08	2.10

Table-7 EDS Data collected for as – cast specimen

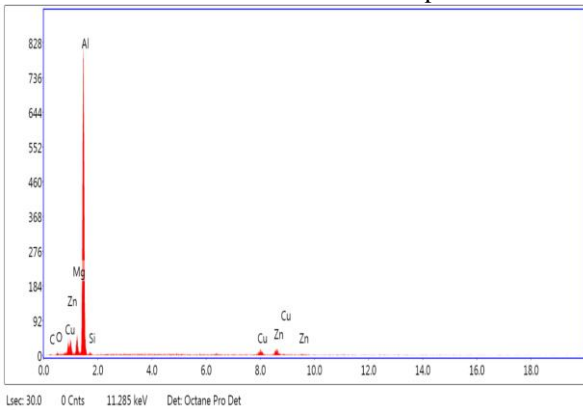


Fig-10 EDS Analysis for as –18hr aged specimen

Element	Weight %	Atomic %
C K	6.25	13.42
O K	3.16	5.10
MgK	4.72	5.01
AlK	74.04	70.80
SiK	1.80	1.65
CuK	4.46	1.81
ZnK	5.58	2.20

Table -8 EDS Data collected for 18hr aged specimen

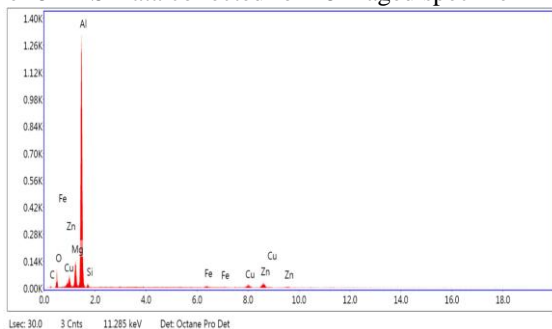


Fig -11 EDS Analysis for 22hr aged specimen

Element	Weight %	Atomic %
C K	7.19	13.69
O K	17.97	25.70
MgK	6.70	6.31
AlK	59.40	50.37
SiK	1.72	1.40
FeK	0.83	0.34
CuK	2.22	0.80

Table-9 EDS Data collected for 22hr aged specimen

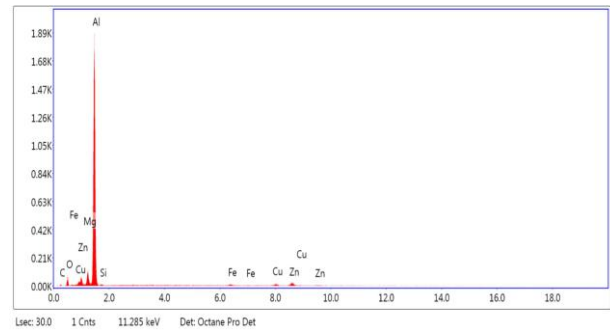


Fig-12 EDS Analysis for 26hr aged specimen

Element	Weight %	Atomic %
C K	7.02	13.70
O K	13.72	20.10
MgK	4.36	4.20
AlK	67.72	58.84
SiK	1.06	0.88
FeK	0.93	0.39
CuK	1.80	0.66

Table-10 EDS Data collected for 26hr aged specimen

Likewise in the EDS examination, the presence of Fe was watched. The presence of Fe affirms the development of the Fe particles from the plate to the example surface. Development of the Fe particles from plate to the example credited to the improvement in hardness of the example after RRA handling. It might be noticed that, development of the Fe particles from the plate to the example increments with ensuing RRA passes. Additionally, the arrangement of oxide layer increments with resulting RRA passes. Consequently, oxidation wear system is more in four pass test contrasted with one pass and two pass tests.

The development of the Fe particles from circle to the example is steady with prior perceptions on RRA prepared cast Al–Cu composite. Spreading and following of the ragged flotsam and jetsam isn't watched. In the weakness burst district, for the as cast, T6 and RRA conditions, fractographic highlights can be found in Fig 7. Overwhelmingly pliable break surfaces were watched, described by the huge dimples of the request of "2.5–9.5µm", "2.2-17.4 µm" and "2.0-12.0 µm" in distance across, individually. Totals of auxiliary particles could frequently be seen inside these dimples. For the three conditions, intergranular disappointment along grain limits in the crack surface can be found, with the disappointment mode being transcendently transgranular. For all systems examined for the three conditions, wandering split surface morphology was constantly watched.

From the outcomes detailed in the writing it is notable that the dispersing between adjoining striations relates with the normal split development rate per cycle for cyclic burdens. Thusly, the information showed in Table for the deliberate striation dividing at the broke surface for the three conditions recommends a connection with exhaustion break development rate. The fractographs gathered from



the area of split development in the high ΔK system can be found in Fig 6 a-c, and uncover the accompanying highlights. For the T6 condition, aside from the nonappearance of aspects, comparative highlights to the low ΔK system can be perceived, yet their unmistakable quality is more prominent because of the high ΔK . Similar highlights found in the low ΔK system for both T6 and RRA conditions were additionally seen in this system. It is conceivable to see in Fig 6b-c the direction of striation arrangement contrasts from fix to fix. This recommends the break front and the split development bearing are changing over the span of spread, for example the split front is presumably not kept up as a straight line, however is probably going to be convoluted. In addition, for the RRA condition, unmistakable void development was seen that is probably going to be related with the split intersection grain limits.

From the outcomes detailed in the writing it is outstanding that the dispersing between contiguous striations connects with the normal break development rate per cycle for cyclic burdens. Thus, the information showed in Table II for the deliberate striation separating at the broke surface for the three conditions recommends a relationship with weakness

IV. CONCLUSION

The conclusions obtained at the end of the experimental studies can be drawn from this study:

- It was seen that fatigue strength changed depending on the heat treatment applied to the sample at the end of the fatigue tests. While the highest fatigue strength was recorded in samples treated with artificial aging (T6) process, the lowest fatigue strength was measured in the annealed samples.
- If the RRA treatment effectively used from that we can enhance life of the material. A conclusion section is not required. Although a conclusion may review the main points of the paper, do not replicate the abstract as the conclusion. A conclusion might elaborate on the importance of the work or suggest applications and extensions.

REFERENCES

1. Lendvai, J. Precipitation and strengthening in aluminium alloys. Mater. Sci. Forum 1996,217, 43–56. [CrossRef]
2. Zandbergen, M.W.; Cerezo, A.; Smith, G.D.W. Study of precipitation in Al–Mg–Si Alloys by atom probetomography II. Influence of Cu additions. Acta Mater. 2015, 101, 149–158. [CrossRef]
3. Miao, W.F.; Laughlin, D.E. Effects of Cu content and preaging on precipitation characteristics in aluminum alloy 6022. Metal. Mater. Trans. A 2000, 31, 361–371. [CrossRef]
4. Rana, R.S.; Purohit, R.; Das, S. Reviews on the influences of alloying elements on the microstructure and mechanical properties of aluminum alloys and aluminum alloy composites. Int. J. Sci. Res. Publ. 2012, 2, 1–7.
5. Grohmann, T. Forming of AMAG 7xxx series aluminium sheet alloys. In Proceedings of the New Developments in Sheet Metal Forming and New Developments in Hydroforming, Fellbach, Germany, 10–11 May 2016.
6. Zhong, H.; Paul, R.; Yuri, E. Effect of alloy composition and heat treatment on mechanical performance of 6xxx aluminum alloys. Trans. Nonferrous Met. Soc. China 2014, 24, 2174–2178. [CrossRef] Metals 2018, 8, 1023 10 of 10 Ringer, S.P.; Hono, K. Microstructural evolution and age hardening in aluminium alloys: Atom probe field-ion microscopy and transmission electron microscopy studies. Mater. Charact. 2000, 44, 101–131. [CrossRef]
8. ASTM International. Standard Test Method for Dynamic Young's Modulus, Shear

9. Modulus, and Poisson's Ratio by Impulse Excitation of Vibration; ASTM International: West Conshohocken, PA, USA, 2002.
10. Giménez, S.; Vleugels, J.; Van der Biest, O. In situ investigation of dewaxing and sintering of stainless-steel powder compacts by impulse excitation. Scr. Mater. 2008, 58, 985–988. [CrossRef]
11. Heinz, S.; Eifler, D. Crack initiation mechanisms of Ti6Al4V in the very high cycle fatigue regime. Int. J. Fatigue 2016, 93, 301–308. [CrossRef]
12. Hansen, N. The effect of grain size and strain on the tensile flow stress of aluminium at room temperature. Acta Metall. 1977, 25, 863–869. [CrossRef]
13. Hansen, N. Hall–Petch relation and boundary strengthening. Scr. Mater. 2004, 51, 801–806. [CrossRef]
14. Kouzeli, M.; Mortensen, A. Size dependent strengthening in particle reinforced aluminium. Acta Mater. 2002, 50, 39–51. [CrossRef]
15. Yonenaga, I.; Motoki, K. Yield strength and dislocation mobility in plastically deformed bulk single-crystal GaN. J. Appl. Phys. 2001, 90, 6539–6541. [CrossRef]
16. Fleischer, R.L. Rapid solution hardening, dislocation mobility, and the flow stress of crystals. J. Appl. Phys. 1962, 33, 3504–3508. [CrossRef]
17. Chai, G.; Zhou, N. Study of crack initiation or damage in very high cycle fatigue using ultrasonic fatigue test and microstructure analysis. Ultrasonics 2013, 53, 1406–1411. [CrossRef] [PubMed]
18. Zuo, J.H.; Wang, Z.G. Han. E.H. Effect of microstructure on ultra-high cycle fatigue behavior of Ti–6Al–4V. Mater. Sci. Eng. A 2008, 473, 147–152. [CrossRef]
19. Ahn, D.G.; Amanov, A.; Cho, I.S.; Shin, K.S.; Pyoun, Y.S.; Lee, C.S.; Park, I.G. Gigacycle fatigue behavior by ultrasonic nanocrystalline surface modification. J. Nanosci. Nanotechnol. 2012, 12, 5902–5906. [CrossRef] [PubMed] © 2018

AUTHORS PROFILE



First Author Prof. Sunil Kumar K Presently Working As Assistant Professor In Department Of Mechanical Engineering RLJIT Doddaballapur Bengaluru Rural. Having Teaching Experience Of 8 Years. Sunil Kumar K Is A Research Scholar, He Is Doing His PhD In Visvesvaraya Technological University.



Second Author Dr. P.L.Srinivasa Murthy (P.L.S) Is Working As An Associate Professor In The Department Of Mechanical Engineering Of M.S.R.I.T, Bangalore, For The Past 27years. He Has Guided Around 40(UG) And 5(PG) Projects And Has 25 Publications (Both National And International) To His Credit. He Awarded Phd From J.N.T.U Anantapur In Materials Field. He Has Authored Mechanics Of Materials, Kinematics Of Machines, Dynamics Of Machines, Mechanical Vibrations, Design Of Machine Elements-1 and Design Of Machine Elements-2 Along With Prof. J.B.K.Das. He Has Given Lectures On The Above Subjects In Several Institutions.