

Controlling of Reactor Temperature and Re-Generator Temperature in FCCU

Elamurugan Periyasamy, Ragul S, Jainul Aafdeen, Varathan G

Abstract: The paper shows the machine of RGA investigation, decoupler and prescient command to the Fluid Catalytic Cracking Unit (FCCU). A circuitous activating archetypal of the riser-regenerator arrangement is urbanized and after acclimated in the controller. A archetypal FCCU processes a ample bulk of the feedstock into added admired products. The all-embracing bread-and-butter allowances of a adorning could be appreciably added if able ascendancy and enhancement strategies are implemented. Ascendancy of the FCC continues to be a arduous and important problem. An ascendancy arrangement is composed of several interacting ascendancy loops. The amount of achievable another configurations of ascendancy loops is actual large. Multi bend ascendancy systems are generally acclimated for multivariable progressions as of their minimalism. Relative accretion arrangement is acclimated to abbreviate the alternation and bidets the capricious pairings and again decoupler is developed to abolish alternation completely. Stabilization can be accomplished through apish accomplishing of a archetypal predictive ascendancy (MPC).

Index Terms: FCCU, Control, RGA, Decoupler, MPC

I. INTRODUCTION

The aqueous catalytic arise assemblage (FCCU) has become the “test bench” of abounding avant-garde ascendancy methods. Today, both academia and industry are cogent abundant absorption in the development of new ascendancy algorithms and in their able automated FCC implementation. Analysis and ascendancy of FCCU action accept been accepted as arduous problems due to the afterward action characteristics, (i) genuine confused and minimal acknowledged hydrodynamics, (ii) roundabout energy of both emerge and coke aflame responses, (iii) capable variation in the midst of the reactor and regenerator, (iv) flourishing working requirements. FCCU's standing backup conduct is dreadful nonlinear, curve to grouped tolerating states, credit multiplicities and so forth

II. LITERATURE SURVEY

Numerous affidavit apropos the FCCU action can be begin in the appear literature. They present assorted aspects of algebraic clay and simulation, stability, enhancement and optimal control. Several studies on activating clay of the accomplished FCC assemblage accept been presented in

Revised Manuscript Received on August 09, 2019.

Elamurugan Periyasamy, Department of EEE, V.S.B. Engineering College, Karur, India.

Ragul S, Department of EEE, V.S.B. Engineering College, Karur, India..

Jainul Aafdeen, Department of EEE, V.S.B. Engineering College, Karur, India..

Varathan G, Department of EEE, V.S.B. Engineering College, Karur, India..

contempo papers. Fundamental clay plan on FCCU has been appear by Lee et al. [1985], Felipe et al. [1992], Kurihara [1967] and McFarlane et al. [1993]. Alhumaizi and Elnashaie et al. [1996] addresses the capital botheration associated with the ascendancy of automated aqueous catalytic arise units. Six simple acknowledgment ascendancy strategies are proposed application two controlled and two manipulated variables. Han and Chung [2000] industrialized a activating archetypal of the reactor, regenerator, agitator carriage curve and added abetting units of avant-garde riser-type FCC assemblage was developed on the base of attention principles. Abul-Hamayel [2003] acclimated four agglomeration models to authenticate the new access for clay the kinetics abstracts that was calm application micro-activity assay (MAT) method. Instead of the acceptable access of accompanying corruption assay of the amount equations, after corruption of anniversary amount blueprint was performed. Raluca Roman, Nagy and Agachi [2005] presents activating simulations for the FCCU accumulated arrangement that includes the capital fractionator and a active archetypal for the riser arch to a 2144th adjustment ODE model. Based on this archetypal an amplified ascendancy arrangement is proposed that is able to ascendancy the artefact administration resulted from the fractionator based on calmly assessable variables in the regenerator-reactor system. Osofisan and Obafaiye [2007] actuate a categorical accord amid the basic variables (reactor temperature/riser aperture hotness, regenerator gas hotness, rejuvenated agitator augment rate, and the airflow rate) concluded the routine of Down-covered Lucidity ascendancy arrangement stays focused and advised a down-covered archetypal able of managing the appropriate uncertainties and blunder commonly associated with the catalytic arise action in an FCCU. Ahari, Farshi and Forsat [2008] developed one-dimensional adiabatic archetypal for FCC assemblage riser that combines through predictive riser hydrodynamic archetypal and a four- agglomeration active archetypal with modification of the active ambit based on Patience et al. (1992) alternation. The actinic reactions were characterized by a four- agglomeration active model, (Han and Chung, 2001), (Juarez et al., 1997) and the enhancement techniques applied. Roman, Nagy, Cristea, Agachi [2009] presents new archetypal and activating simulation after-effects for the FCCU reactor-regenerator-main fractionator accumulated arrangement application 5 agglomeration active archetypal for the riser. The archetypal consists in a set of 933 ODEs. Based on this circuitous nonlinear model, altered Archetypal Predictive Ascendancy based algorithms accept been advised for the FCCU control. A 5×5 ascendancy arrangement is proposed and accepted as getting able to ascendancy the gasoline acquired from the capital fractionators.



III. FCC UNIT

Fluidized reactant emerge (FCC) is a significant activity in petroleum treatment facilities. It redesigns inexhaustible hydrocarbons to lighter included respected articles by breaking, and is the above minister of gas in processing plants. FCCUs present difficult multivariable domination issues. The original comprises of subsystems: increase and preheat framework, reactor, regenerator, air blower, wet gas blower and instigator distribution lines. The reactor and regenerator are included significant for the FCCU procedure. It comprises of arranged grown-up synthetic/physical procedures. Model: synergist emerge actinic responses, three appearance (gas-fluid strong) watery elements, fanciful backup calefaction move, and so on. In this activity the reactant action, multiphase aggregation fluidized cachet and included working ambit (for example affirmation temperature and course of action trouble and so on are scientific for balancing out the activity and bearing the capable oil articles with top effectiveness.

A. DESCRIPTION

The schematic breeze diagram of an archetypal avant-garde FCC assemblage apparent in Fig.1 beneath is based aloft the "side-by-side" configuration.

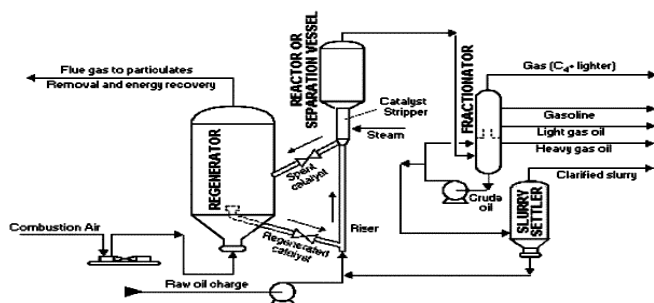


Figure 1. Diagrammatic Exemplification of FCC unit

he preheated top preparing oil feedstock (at around 315 to 430 °C) comprising of proceeded with shift hydrocarbon atoms is aggregated with reuse slurry oil from the basal of the refreshment procession and infused into the instigator riser region it is vaporized and foolish into lessen particles of breath by associate and bond with the real hot sensitive fomenter from the regenerator. The majority of the emerge responses yield habitation the instigator riser. The hydrocarbon dishonor "fluidize" the sensitive instigator and the admixture of hydrocarbon humbling and fomenter streams headway to get to the reactor at a temperature of around 535 °C. The reactor is in reality alone a jump where the preposterous ancient rarity humbling are: (a) far off from the supposed spent fomenter by flourishing through a lot of two-organize violent winds inside the reactor (b) the spent instigator streams bottomward through a hamburger stripping territory to nullify any hydrocarbon dishonor up to the spent instigator assignment to the fomenter regenerator. The breeze of spent fomenter to the regenerator is adjusted by a quicken valve in the spent instigator line. Since the emerge responses result some carbonaceous genuine (alluded to as coke) that stores on the instigator and real bound decreases the fomenter reactivity, the fomenter is recovered by ablaze off the kept coke with air crushed into the regenerator. The regenerator works at a temperature of around 715 °C and a weight of

about 2.41 barg. The combustion of the coke is exothermic and it delivers an adequate greater part of calefaction that is in part enraptured by the recovered instigator and gives the calefaction proper to the lack of hydration of the feedstock and the endothermic emerge responses that yield home the fomenter riser. Therefore, FCC units are for the most part alluded to as getting calefaction adjusted.

IV. MODEL FOR FCCU

In this activity the significant abstinent factors are called to be the reactor temperature/riser gap temperature (T_{RA}) and the regenerator gas temperature (T_{RG}). The controlled factors are breeze measure of recovered instigator (R_{RC}), breeze measure of spent catalyst (R_{SC}) and breeze measure of air to the regenerator (R_{AI}). The dirt of roaming actinic frameworks for the recreation of activity elements and domination has been inspired by the bread-and-butter motivations for development of bulb task and bulb structure, as on account of FCCU. A large portion of the bread-and-butter gradual addition from FCC authority improvement has show up from the upgrade level, with the change game plan guilelessly accessories steady, responsive, and safe task. The botheration is to obtaining controller conspires that are (1) Effective, (2) Economically defended, (3) Related to total practice, and (4) Able to suit capable abettor interface whenever wanted.

DEVELOPMENT OF MODEL

An unchanging prototype is adjusted for the riser. In this work, a capable connected domination game plan of Joseph A. Bromley and Thomas J. Ward (1981) is utilized. In this plan, expand is gasoil which can capable into fuel or burning gas. The Hold up of impetus is known

$$\frac{dH_{RA}}{dt} = [R_{RC} - R_{SC}]$$

Note: $\frac{dH_{RG}}{dt} = -\frac{dH_{RA}}{dt}$

B. REACTOR MODEL

The impetus is steam-stripped in the reactor holder to kill hydrocarbons. The reactor slide is offended in a twister to remove impetus and the item vapors abandon to an item fractionator. The harmony condition of reactor temperature is known by,

$$\frac{dT_{RA}}{dt} = \frac{R_{RC}}{H_{RA}} (T_{RG} - T_{RA}) + \frac{1}{S_C H_{RA}} [-S_F D_{TF} R_{TF} (T_{RA} - T_{TF}) - \Delta H_{FV} D_{TF} R_{TF}] - \frac{\Delta H_{CR} R_{OC}}{S_C H_{RA}}$$

$$R_{OC} = D_{TF} R_{TF} C_{TF}$$

$$\frac{C_{TF}}{1 - C_{TF}} = \frac{K_{CR} P_{RA} H_{RA}}{R_{TF}}$$

C. REGENERATOR MODEL

The stability equation of Regenerator temperature is specified by

$$\frac{dT_{RG}}{dt} = \frac{R_{SC}}{H_{RG}} (T_{RA} - T_{RG}) + \frac{1}{S_C H_{RG}} [-S_A R_{AI} (T_{RG} - T_{AI}) + \Delta H_{RC}]$$

$$R_{CB} = \left(\frac{R_{AI}}{C_1} \right) (21 - O_{FG}) / 100$$

V. GOVERNING OF FCCU

The command of introduced factors is significant for the capable and safe activity of the collection and has supreme appulse on the articles yield. Command of the FCC has been and associated burdensome and significant issue. As will be seen, its standing backup conduct is terrible nonlinear, curve to grouped withstanding states, attribute multiplicities, and all that infers. The reactor temperature must be kept up at a confident much the same as oblige an adjusted best turnaround of the increase oil. A capable reactor temperature authority organization as well an adequate organization of warm vitality. Command of reactor instigator record is extremely imperative to oblige adjustment and confirmation in the fomenter course. Reactor load domination anon impacts the coke and gases development. Piece of the articles must be kept up at adjusted self-assured morals to guarantee the articles predominant and bulb efficiency. The beck moves the affirmation articles flying to the articles growth segment. The standpipe moves spent instigator constantly from the separator to the regenerator by a power valve. In the regenerator, spent instigator particles are severe in the participation of air. The air breeze add up to the regenerator is constrained by a domination valve that vents bits of the air to the air. On the highest point of the regenerator, violent winds achieve the instigator break from the vent gas stream.

A. RELATIONS OF CONTROL LOOPS

Consider a procedure with two controlled yields and two controlled contributions to figure 2.

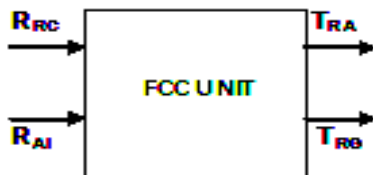


Figure 2. MIMO system

The input-output associations are agreed by,

$$y_1(s) = G_{11}(s)m_1(s) + G_{12}(s)m_2(s)$$

$$y_2(s) = G_{21}(s)m_1(s) + G_{22}(s)m_2(s)$$

Where $G_{11}(s)$, $G_{12}(s)$, $G_{21}(s)$ and $G_{22}(s)$ are the four exchange capacities concerning the two contributions with the two yields. These conditions show that the change in or resolve the impact of both controlled yields. Two planned tribulations emerge from this procedure dealings.

- It may undermine the shut circle framework.

It will in general figure controller tuning valuable complicated.

B. RELATIVE GAIN ARRAY

Relative gradual addition plan gives an admeasurements of cooperation dependent on tolerating backup conditions. It is accustomed to bidets the sets of credit and accomplishment factors in acclimation to shorten the greater part of shift a piece of the predictable circles. Relative accumulation course of action is offering as Relative growth game plan is offering as

$$\lambda = \begin{bmatrix} \lambda_{11} & \lambda_{12} \\ \lambda_{21} & \lambda_{22} \end{bmatrix}$$

Where

$$\lambda_{11} = \frac{(\Delta y_2 / \Delta m_2) m_2}{(\Delta y_2 / \Delta m_2) y_2}$$

$$\lambda_{12} = \frac{(\Delta y_2 / \Delta m_2) m_1}{(\Delta y_2 / \Delta m_2) y_2}$$

$$\lambda_{21} = \frac{(\Delta y_1 / \Delta m_1) m_2}{(\Delta y_1 / \Delta m_1) y_1}$$

$$\lambda_{22} = \frac{(\Delta y_1 / \Delta m_1) m_1}{(\Delta y_1 / \Delta m_1) y_1}$$

The whole of relative gains in any line or segment of the exhibit is equivalent to one. In this manner $\lambda_{11} + \lambda_{21} = 1$

$$\lambda_{21} + \lambda_{22} = 1$$

$$\lambda_{11} + \lambda_{12} = 1$$

$$\lambda_{12} + \lambda_{22} = 1$$

If one value is known the other three values can be easily computed.

In particular

i) If $\lambda_{11} = 0$, then $y_1(T_{RA})$ do not act in response to $m_1(R_{RC})$ and m_1 ought to not be worn to control y_1 .

ii) If $\lambda_{11} = 1$, then $m_2(R_{AI})$ do not impinge on y_1 and the control loop between y_1 and m_1 do not interact with loop of $y_2(T_{RG})$ and m_2 .

iii) If $0 < \lambda_{11} < 1$, then the relations subsists and as m_2 varies it affects equilibrium state assessment of y_1 the minor value of λ_{11} , the superior interaction becomes.

iv) If $\lambda_{11} < 0$, then m_2 causes strong effects on y_1 and in opposite direction from that caused by m_1 .

The imperative feedback that afford automatic control of FCCU are, (i) Control of reactor temperature (T_{RA}) by manipulation of the regenerated catalyst rate (R_{RC}) and (ii) Control of regenerator temperature (T_{RG}) by manipulation of the air flow rate (R_{AI}).

C. DESIGN OF NON INTERACTING CONTROL LOOPS

The relative gain array indicates how the inputs ought to be coupled with the outputs to outline loops with the slighter amount of interaction. To revoke the interaction effects flanked by two loops, a Decoupler is worn.

D. DECOUPLING CONTROL SYSTEM

Basic Idea is to use added controllers to atone for action alternation and appropriately abate ascendancy bend interaction. Ideally; decoupling ascendancy allows set point changes to affect alone the adapted controlled variables. Typically, decoupling controllers are advised application a simple action archetypal (e.g. abiding accompaniment archetypal or alteration action model).

Controlling of Reactor Temperature and Re-Generator Temperature in FCCU

Two ascendancy loops by coupling m_1 with y_1 and m_2 with y_2 is formed. Assume that initially both the outputs are at the adapted set point ethics. Suppose that a agitation or set point Changes could cause the ambassador of loop 2 to alter the amount of m_2 , this will actualize an causeless agitation for loop 1 and will cause to aerate from its desired.

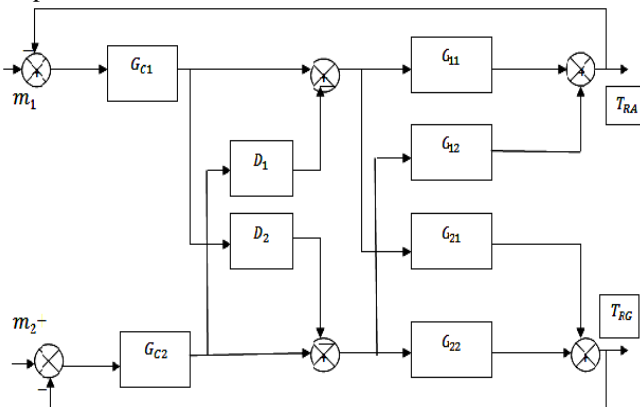


Figure 3. Block Diagram of Decoupler Diagram

From fig [2], to keep y_1 constant, m_1 ought to be tainted by the subsequent quantity:

$$m_1 = -\frac{G_{12}(s)}{G_{11}(s)} m_2$$

Above equation implies a dynamic element with transfer function

$$D_1(s) = -\frac{G_{12}(s)}{G_{11}(s)}$$

This dynamic element is called a Decoupler. It cancels any effect that loop 2 might have on loop 1. To eliminate the interaction from loop 1 to loop 2, use the dynamic element $D_2(s)$.

$$D_2(s) = -\frac{G_{21}(s)}{G_{22}(s)}$$

E. Model Predictive Control

In the advanced array of actinic processes, nonlinearity is rather the aphorism than the exception. Although it is able-bodied accustomed that the achievement of a ascendancy arrangement is a lot of abased on how auspiciously it can cope with the nonlinearity of the process, actinic processes accept been commonly controlled by algorithms based on beeline time-invariant almost action models, the a lot of accepted getting footfall and actuation acknowledgment models acquired from the coil integral. In the accomplished decade, archetypal predictive ascendancy (MPC) has become a adopted ascendancy action for a ample amount of processes. The capital affidavit for this success abide in its adeptness to handle constraints in an optimal way and the adaptability of its conception in the time domain. MPC has the adeptness to ahead approaching contest and can yield ascendancy accomplishments accordingly. MPC models adumbrate the change in the manipulated variables of the modeled arrangement that will be acquired by changes in the absolute variables. In this process, absolute variables that can be adapted by the ambassador are generally either the set credibility of the temperature which is an ascendancy variable. MPC uses the accepted bulb measurements, the accepted activating accompaniment of the process, the MPC models, and the action capricious targets and banned to

account approaching changes in the abased variables. These changes are affected to authority the abased variables abutting to ambition while anniversary constraints on both absolute and abased variables. The MPC about sends out alone the aboriginal change in anniversary absolute capricious to be implemented, and repeats the adding if the next change is required.

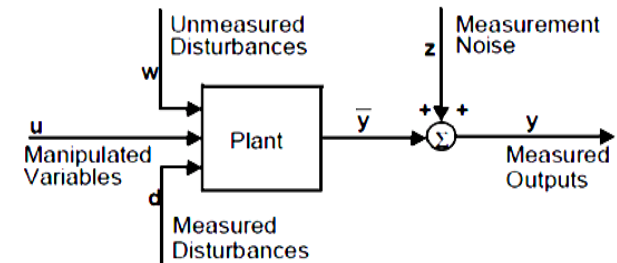


Figure 4. Block diagram for a process

VI. RESULTS AND DISCUSSION

The analysis on the activating characteristics of FCC assemblage reveals that FCC processes abide of two ascribe and two outputs. For practical agitation mode, a accepted best of variables to be adapted is the riser aperture temperature (T_{RA}) and the temperature of regenerator's temperature (T_{RG}). If the pairings T_{RA} - R_{RC} and T_{RG} - R_{AI} are called to architecture a decentralized T_{RA} - R_{RC} and T_{RG} - R_{AI} ascendancy anatomy is acquired. The algebraic archetypal advised in this plan simulates the capital appearance of the behavior of FCCU units, as it is apparent in amount 5 and amount 6, then Response of T_{RA} & T_{RG} with PID ambassador has apparent in amount 7.

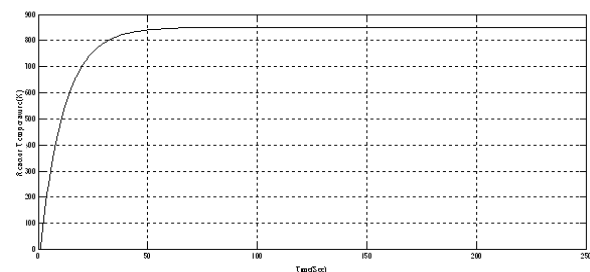


Figure 5. Steadystate Response of Reactor Temperature

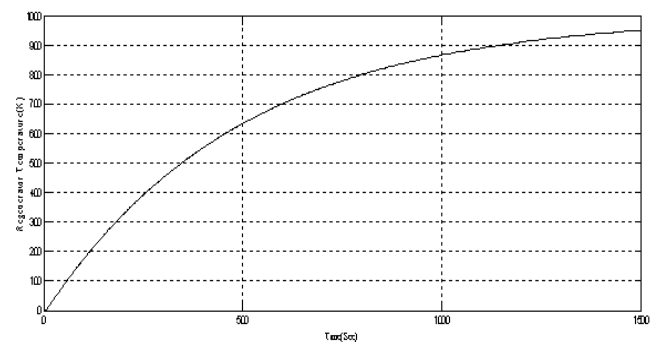


Figure 6. Steadystate Response of Regenerator Temperature

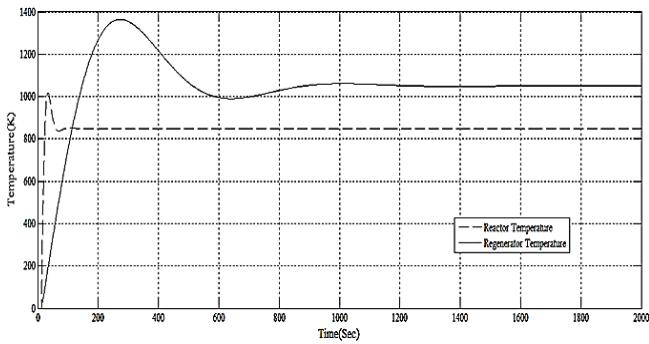


Figure 7. PID Controller Response of Reactor Temperature and Regenerator Temperature

A. RELATIVE GAIN ARRAY ANALYSIS

For the choice of pairing the response obtained is shown in figure (8) and (9).

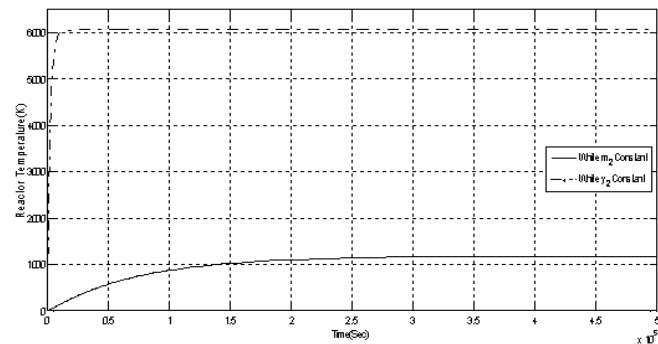


Figure 8. Reactor Temperature responses while m_2 & y_2 constant

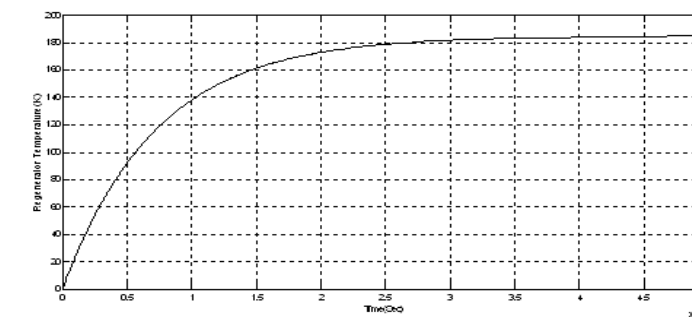


Figure 9. Regenerator Temperature response while m_2 constant

For this choice of pairing the relative gain matrix obtained is

$$\lambda = \begin{bmatrix} 0.98 & 0.02 \\ 0.02 & 0.98 \end{bmatrix}$$

So the desirable pairing is to couple m_1 with y_1 and couple m_2 with y_2 .

B. Decoupler Design

Since there is some alternation amid two loops, decoupler is acclimated to abolish the interaction. The activating elements of decoupler are advised application the formula's accustomed in [4.4] & [4.5]. The simulation aftereffect application decoupler is apparent in Figure 10 and Figure

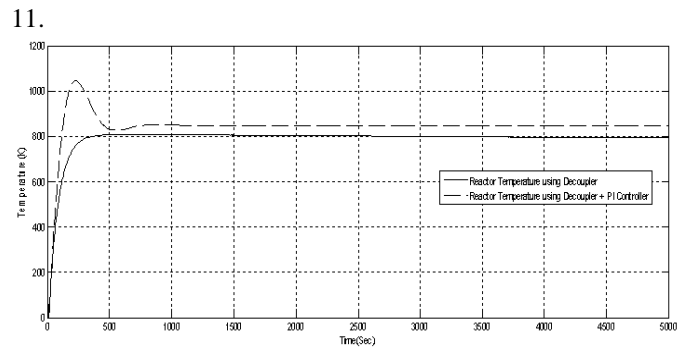


Figure 10. Response of Reactor Temperature using Decoupler & Decoupler with PI Controller

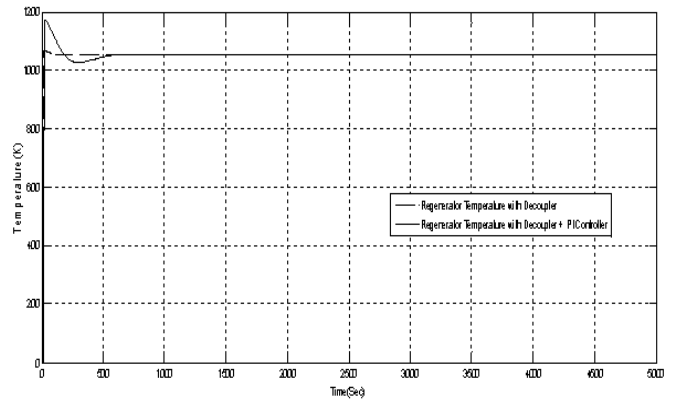


Figure 11. Response of Regenerator Temperature using Decoupler & Decoupler with PI Controller

The Closed Loop Response of Reactor & Regenerator Temperature and the Closed Loop using MPC has shown in figure(12).

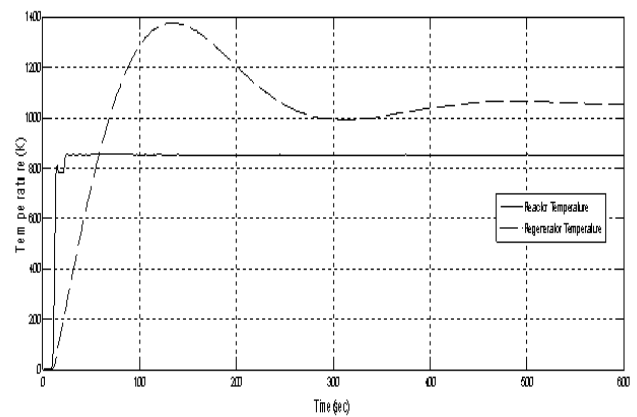


Figure 12. Closed Loop Response of Reactor and Regenerator Temperature using MPC

VII. PERFORMANCE ANALYSIS

The appearance of the complete closed-loop response, from time $t=0$ until abiding accompaniment has been reached, could be acclimated for the conception of activating achievement criterion. Time-Integral achievement belief are based on the absolute acknowledgment of the process. The a lot of generally acclimated are:

1. Integral of the square error
2. Integral of the absolute error



Controlling of Reactor Temperature and Re-Generator Temperature in FCCU

3. Integral of Time weighted Absolute Error

A. INTEGRAL OF THE SQUARE ERROR

To abolish ample errors, ISE is bigger than IAE because the errors are boxlike and appropriately accord added to the amount of integral.

B. INTEGRAL OF THE ABSOLUTE ERROR

To abolish baby errors, IAE is bigger than ISE because while squaring baby numbers they become even smaller.

C. INTEGRAL OF THE TIME -WEIGHTED ABSOLUTE ERROR

To abolish errors that abide for continued times, ITAE archetype will tune the controllers bigger because the attendance of ample amplifies the aftereffect of even baby errors in the amount of integral.

For decoupler, the parameter values are given below in Table 1 and Table 2.

Table 1. Performance Analysis of T_{RA} using Decoupler + PI controller and Model Predictive Controller

PERFORMANCE CRITERION	PI Decoupler	Model Predictive Controller
ISE(Integral of the square error)	6.25	0.25
IAE(Integral of the absolute error)	12.5	2.5
ITAE(Integral of Time weighted Absolute Error)	312.5	62.8

Table 2. Performance Analysis of T_{RG} using Decoupler + PI controller and Model Predictive Controller.

PERFORMANCE CRITERION	PI Decoupler	Model Predictive Controller
ISE(Integral of the square error)	4.625	0.17
IAE(Integral of the absolute error)	9.5	1.7
ITAE(Integral of Time weighted Absolute Error)	171.125	28.9

VIII. CONCLUSION

The clay o fluidized catalytic arise is presented here. For this alternation process, alternative of bond is done by about accretion array. According to RGA matrix, the variables are commutual and afresh bend acknowledgment is found. Recommended bond to abbreviate the alternation is begin by RGA analysis. To abolish the alternation completely, decouplers are advised and implemented in the simulink. The affection of simulink abetment provides a simulation ambiance for able accomplishing of the archetypal to ascendancy the FCC process. In approaching the plan has been continued to assay the aftereffect of reactor temperature and regenerator temperature in about-face of absolute feed(volume fraction) application MPC.

NOMENCLATURE

C_1 Fitting constant for particular data

C_{CAT} Concentration of catalytic carbon on catalyst, wt%

C_{RC} Concentration of regenerated catalyst, wt%

C_{SC} Concentration of spent catalyst, wt%

C_{TF} Conversion of total feed, volume fraction

D_{TF} Density of total feed, kg/m^3

F_{CF} Factor for carbon formation of feed, $(kg\ carbon/s) / (m^3/s)$

H_{RA} Hold up of catalyst in the reactor, Kg

H_{RG} Hold up of catalyst in the regenerator, Kg

O_{FG} Oxygen in flue gas, mol%

R_{AI} Rate of regenerator air, kg/s

R_{CB} Rate of coke burning, kg/s

R_{CC} Rate of catalytic carbon formation in the reactor, kg/s

R_{CF} Rate of carbon forming on catalyst, kg/s

R_{OC} Rate of gas oil cracking, kg/s

R_{RC} Rate of regenerated catalyst, Kg/s

R_{SC} Rate of spent catalyst, kg/s

R_{TF} Rate of total feed, m^3/s

S_A Specific heat of air, J/kg-k

S_C Specific heat of catalyst, J/kg-k

T_{AI} Temperature of air, K

T_{RA} Temperature of Reactor, K

T_{RG} Temperature of Regenerator, K

T_{TF} Temperature of feed, K

ΔH_{CR} Heat of cracking, J/kg

ΔH_{FV} Heat of feed vaporization, J/kg

ΔH_{RG} Heat of regeneration (coke burning), J/kg

REFERENCES

- Elamurugan.P, and Dinesh Kumar D.2010. "Modeling and Control of Fluid Catalytic Cracking Unit in Petroleum Refinery." *International Journal of Computer Communication and Information System* 2 (1): 55-59. doi:http://www.ijcns.com/pdf/11.pdf
- N. Rajeev., Krishna Prasad, and U. B. Reddy Ragul.2015. "Process Simulation and Modeling of Fluidized Catalytic Cracker Performance in Crude Refinery." *Petroleum Science and Technology* 33:110–117. doi: <http://www.researchgate.net/publication/269985843>
- Elamurugan P, Dinesh kumar D and Siva K. 2019. "Investigation of Multivariable Controllers for Fluid Catalytic Cracking Unit". *Caribbean Journal of Science*, 53,(1):565-571. doi: <http://www.caribjsci.com/gallery/44.pdf>
- JafarSadeghzadehAhari., Amir Farshi, and KhaledForsat.2008. "A Mathematical modeling of riser reactor in industrial unit." *Petroleum & coal*50(2):15-24. doi:<http://www.researchgate.net/publication/26524354>

5. ChunyangJia., SoharbRohani, and Arthur Jutan.2003. "FCC unit modeling, identification and model predictive control, a simulation study." *Chemical Engineering and processing* 42: 311-325. doi: <http://www.sciencedirect.com/science/article/pii/S0255270102000557>
6. Elamurugan P and Siva K. 2016. "Analysis of Multivariable Controller for Fluid Catalytic Cracking Unit in Petroleum Refinery". *Journal of Advances in Chemistry*, 12(18),:5088-5095. doi: <https://doi.org/10.24297/jac.v12i18.605>
7. Raluca Roman., Zoltan K. Nagy., Mircea V. Cristea, and Serban P. Agachi. 2009. "Dynamic modelling and nonlinear model predictive control of a Fluid Catalytic Cracking Unit." *Computers and Chemical Engineering* 33:605–617. doi: <http://www.sciencedirect.com/science/article/pii/S0098135408001622>
8. RohitRamachandran., G.P.Rangaiah, and S.Lakshminarayanan. 2007. "Data analysis, modeling and control performance enhancement of an industrial fluid catalytic cracking unit" *Chemical Engineering Science* 62: 1958 – 1973. doi: <http://www.sciencedirect.com/science/article/pii/S0009250906007974>
9. Mircea V. Cristea., Serban P. Agachi, and VasileMarinoiu.2003. "Simulation and model predictive control of a UOP fluid catalytic cracking unit" *Chemical Engineering and Processing* 42: 67- 91. doi:<http://www.sciencedirect.com/science/article/pii/S025527010200017X>
10. Raj Kumar Gupta., VineetKumar, and V.K. Srivastava. 2007. "A new generic approach for the modeling of fluid catalytic cracking (FCC)riser reactor *Chemical Engineering Science* 62: 4510–4528. doi:<http://www.sciencedirect.com/science/article/pii/S0009250907004046>
11. MehranHeydari., Habib Ale Ebrahim, and BahramDabir. 2010. "Modeling of an Industrial Riser in the Fluid Catalytic Cracking Unit." *American Journal of Applied Sciences* 7 (2): 221-226. doi: <http://thescpub.com/PDF/ajassp.2010.221.226.pdf>
12. Elamurugan P and Siva K. 2016. "Comparison of Decoupler with PID Controller and Model Predictive Controller for the Fluid Catalytic Cracking Unit in Petroleum Refinery". *Asian Journal of Information Technology*, 15(17):3356-3365. Available: <http://docsdrive.com/pdfs/medwelljournals/ajit/2016/3356-3365.pdf>



Mr. Varathan G is an Assistant Professor, Department of Electrical and Electronics Engineering in VSB College of Engineering, Karur. He was awarded M.E degree by Anna University Chennai at Thiagarajar college of Engineering, Madurai and B.E degree by Anna University Chennai at Shanmuganathan Engineering College Pudukottai. He has more than 10 years of teaching experience. His area of interest includes Distributed Generation, Voltage stability, and Islanding operation of Power system. He has published papers in number of international journals and presented papers in international conferences. He has undergone Training programs at National Institute of Wind Energy, Chennai.

AUTHORS PROFILE



Dr. P. Elamurugan, M.E Ph.D, is currently working as a Assistant Professor in the Department of Electrical and Electronics Engineering at Chettinad College of Engineering V.S.B. Engineering College, Karur and has total 9 years of teaching experience. . He received his PhD degree at Anna University Chennai. . He was awarded PG degree by Anna University Chennai for his Masters in Instrumentation Engineering at Madras Institute of Tehnology and B.E degree by Anna University Chennai for his bachelors in Electronics and Instrumentation Engineering at Velammal Engineering College, Chenna His area of interest includes Process Control, Industrial Instrumentation and Distributed Control system..Attended a special trainingprogramme in MATLAB and DCS.



Mr. S. Ragul is an Assistant Professor, Department of Electrical and Electronics Engineering in VSB College of Engineering, Karur. He was awarded M.E degree by Anna University Chennai at Nandha engineering college , Erode and B.E degree by Anna University at chettinad college of engineering and technology . He has more than 3 years of teaching experience. His area of interest includes Power Electronics and Drives. He has published papers in number of international journals and presented papers in international conferences.



Mr. A. Jainulafdeen is an Assistant Professor, Department of Electrical and Electronics Engineering in VSB College of Engineering, Karur. He was awarded M.E degree by Anna University Chennai at Anna university campus, Coimbatore and B.E degree by Anna University Chennai at CSI college of Engineering, Ooty. He has more than 9 years of teaching experience. His area of interest includes Power Electronics and Drives. He has published papers in number of international journals and presented papers in international conferences. He has undergone faculty development programs at National Institute of Technical Training Institute, Chennai and also undergone inplant training at Larsen and Toubro.

