


# CFD Modeling on Influence of Impinging Spout Strength for Device Cooling with Water- $\text{Al}_2\text{O}_3$ Nanofluid

N. K. Kund



**Abstract:** Current assessment get through to the effect of spout strength aimed at spout impact cooling through water- $\text{Al}_2\text{O}_3$  nanofluid. CFD codes got established to compute the governing equalities of mass, force and drive for envisaging the thermal issues. CFD codes got executed through water- $\text{Al}_2\text{O}_3$  nanofluid spouts to envisage thermal issues on the chosen plate. It uses 3 mm nozzle dimension, 5 mm nozzle to plate distance and varying spout strengths of 42, 52, 62 and 72 m/s. As projected from every temperature arena, the temperature gently grows from spout impact spot on chosen plate along centrifugally peripheral course. This could stand because of thermal outflow using water- $\text{Al}_2\text{O}_3$  nanofluid. The developments of temperature disparities alongside the radial course aimed at the identified cases are really similar. Still, the extreme temperatures over the chosen plate for situations with spout strengths of 42, 52, 62 and 72 m/s are detected to remain 320, 315, 310 and 308 K, respectively. It may be witnessed that there is no such significant decrease in temperature from spout strength of 62 to 72 m/s (involving loss of extra mechanical power). Hence, the spout strength of 62 m/s embraces rather lesser mean temperature and so, it stands as the ideal one.

**Index Terms:** CFD Codes, Spout Strength, Thermal Control, Water- $\text{Al}_2\text{O}_3$  Nanofluid.

## I. INTRODUCTION

The striking spouts gathered various practices for demonstration in paper parching, textile treating, automobile fabrication, metal normalizing, gadget thermal control, etc. The standard thermal control arrayed heretofore for illustration atmospheric convection inappropriate for extreme thermal flux treatments. Still, in the preceding years the strange way of thermal control has compelled the researchers' everywhere within the domain for the routine of fluid spout impact cooling.

Additionally, the nanofluid thermal control is candidly spirited as ambient thermal control is poor to deliver the drive. Numerical and experimental reviews on heat spreading over rectangular domain are existent in texts [1-7]. Computational and experimental work with solidification are also illustrated [8-20].

Irrespective of the evidence that the fluid jvt impact cooling equivocates the issues about the extreme heat battle as to ambient thermal control, then again, the treatment of

nanofluid for impacting spout remains the significant drive of the extant exploration. Here, the thermal controls of impacting spout through water- $\text{Al}_2\text{O}_3$  nanofluid stand explored computationally. Besides, the extant CFD exploration recounts to the influence of spout strength on spout impact cooling through water- $\text{Al}_2\text{O}_3$  nanofluid.

## II. REVELATION OF PHYSICAL THEME

Figure 1 reveals the physical topic course purview covering a chosen hot plate indicating the foot edge, a nozzle of inflow velocity at mid of the upper edge and two upright edges signposted through outflow boundary state with exodus pressure imitating to ambient pressure.

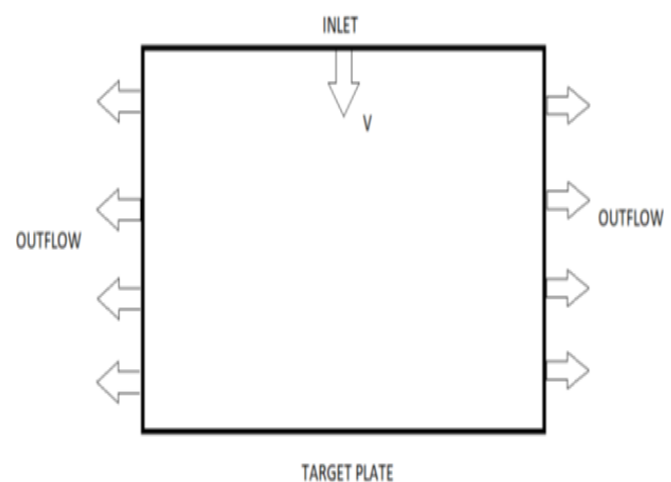


Figure 1. Physical theme course purview

## III. COMPUTING METHODOLOGY

Figure 2 divulges the CFD Worktable aimed at computing the above declared physical topic course. To facilitate the CFD forecasts the binding stages such as constructing geometry and purview, meshing and initialization are followed to run the simulation. Here, the prevailing equalities (as termed below through equalities 1-4) of mass, force and drive beside the edge states are chosen. Linearized equalities are computed through the CFD codes. After the development of computations, CFD codes form the shapes and curls through that numerous graphs standstrained to amalgam the CFD forecasts through the prognoses. With the later dispensation the forecasts are scrupulously explored aimed at receiving abundant insights.

Manuscript published on 30 August 2019.

\*Correspondence Author(s)

N. K. Kund, Department of Production Engineering, Veer Surendra Sai University of Technology, Burla (Sambalpur), Odisha, India.

© The Authors. Published by Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP). This is an open access article under the CC-BY-NC-ND license <http://creativecommons.org/licenses/by-nc-nd/4.0/>

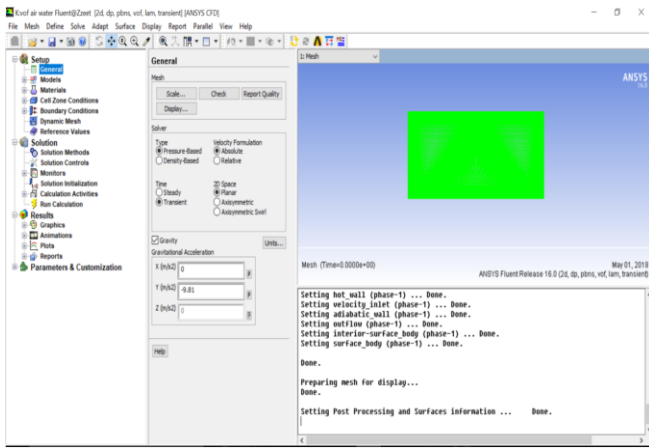


Figure 2. Course Purview Within CFD Interface

Continuity: 
$$\frac{\partial u}{\partial x} + \frac{\partial v}{\partial y} = 0 \quad (1)$$

X-momentum:

$$\rho \left( \frac{\partial u}{\partial t} + u \frac{\partial u}{\partial x} + v \frac{\partial u}{\partial y} \right) = - \frac{\partial p}{\partial x} + \mu \left( \frac{\partial^2 u}{\partial x^2} + \frac{\partial^2 u}{\partial y^2} \right) \quad (2)$$

Y-momentum:

$$\rho \left( \frac{\partial v}{\partial t} + u \frac{\partial v}{\partial x} + v \frac{\partial v}{\partial y} \right) = - \frac{\partial p}{\partial y} + \mu \left( \frac{\partial^2 v}{\partial x^2} + \frac{\partial^2 v}{\partial y^2} \right) + \rho g \quad (3)$$

Energy: 
$$\left( \frac{\partial T}{\partial t} + u \frac{\partial T}{\partial x} + v \frac{\partial T}{\partial y} \right) = \alpha \left( \frac{\partial^2 T}{\partial x^2} + \frac{\partial^2 T}{\partial y^2} \right) \quad (4)$$

In the ongoing analysis, CFD codes are executed with water-Al<sub>2</sub>O<sub>3</sub> nanofluid spouts. It envisages the influence of spout strength on thermal issues with 3 mm nozzle dimension, 5 mm nozzle to plate distance and varying spout strengths of 42, 52, 62 and 72 m/s. The convective governing equalities of mass, force and drive are computed for envisaging the thermal issues. The time pace selected throughout the intact computation is 0.0001 s.

Further, the thermo-physical data of Al<sub>2</sub>O<sub>3</sub> nanoparticles reflected in the existent analysis plus the ambient situation involved in the current course computations, are briefed too in understated Table 1.

Table 1. Thermophysical And Ambient Data.

Nanoparticle Data	Al <sub>2</sub> O <sub>3</sub>
Density, $\rho$ (Kg/m <sup>3</sup> )	3970
Specific heat, $C_p$ (J/kg-K)	765
Thermal conductivity, $k$ (W/m-K)	36
Ambient temperature	300 K



IV. RESULTS AND DISCUSSION

Effect of Spout Strength on Device Cooling Issue

CFD codes are developed and executed with water-Al<sub>2</sub>O<sub>3</sub> nanofluid. It envisages the influence of spout strength on thermal issues with 3 mm nozzle dimension, 5 mm nozzle to plate distance and varying spout strengths of 42, 52, 62 and 72 m/s.

A. Representative Study with Spout Strength of 42 m/s

Figure 3 divulges the tinted temperature arena integrated with the tinted flat scale for chosen plate. Obviously, it relates to spout strength of 42 m/s. As projected, the temperature gently grows from spout impact spot on chosen plate along centrifugally peripheral course. Additionally, the prophesied temperature ranges between 300 K (at spout impact spot) to 320 K (on outlying arena) over the chosen plate. This could stand because of thermal outflow using water-Al<sub>2</sub>O<sub>3</sub> nanofluid.



B. Representative Study with Spout Strength of 52 m/s

Figure 4 divulges the tinted temperature arena integrated with the tinted flat scale for chosen plate. Obviously, it relates to spout strength of 52 m/s. As projected, the temperature gently grows from spout impact spot on chosen plate along centrifugally peripheral course. Additionally, the prophesied temperature ranges between 300 K (at spout impact spot) to 315 K (on outlying arena) over the chosen plate. This could also stand because of thermal outflow using water-Al<sub>2</sub>O<sub>3</sub> nanofluid.

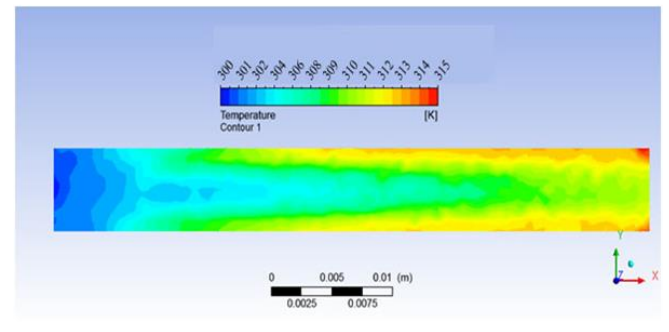


Figure 4. Temperature arena for spout strength of 52 m/s

C. Representative Study with Spout Strength of 62 m/s

Figure 5 divulges the tinted temperature arena integrated with the tinted flat scale for chosen plate. Obviously, it relates to spout strength of 62 m/s. As projected, the temperature gently grows from spout impact spot on chosen plate along centrifugally peripheral course.

Additionally, the prophesied temperature ranges between 300 K (at spout impact spot) to 310 K (on outlying arena) over the chosen plate. This could also stand because of thermal outflow using water-Al<sub>2</sub>O<sub>3</sub> nanofluid. Furthermore, the advent of barrier form inside the temperature arena could stand owing to the incidence of trivial turbulence alongside the stream.



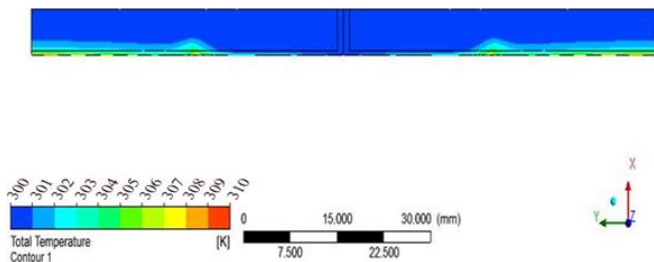


Figure 5. Temperature arena for spout strength of 62 m/s

**D. Representative Study with Spout Strength of 72 m/s**

Figure 6 divulges the tinted temperature arena integrated with the tinted flat scale for chosen plate. Obviously, it relates to spout strength of 72 m/s. As projected, the temperature gently grows from spout impact spot on chosen plate along centrifugally peripheral course. Additionally, the prophesied temperature ranges between 300 K (at spout impact spot) to 308 K (on outlying arena) over the chosen plate. This could also stand because of thermal outflow using water-Al<sub>2</sub>O<sub>3</sub> nanofluid.

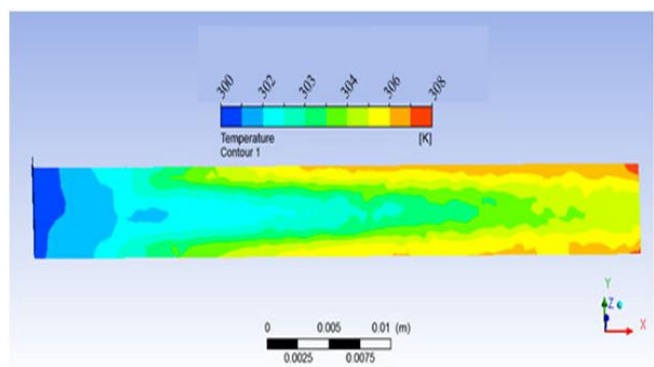


Figure 6. Temperature arena for spout strength of 72 m/s  
Evaluation of Representative Studies with Varying Spout Strengths

Figure 7 forms the realistic graphs vis-à-vis temperature against radial distance for varying spout strengths of 42, 52, 62 and 72 m/s. The developments of temperature disparities alongside the radial course aimed at the identified cases are really comparable. Still, the extreme temperatures over the chosen plate for situations with spout strengths of 42, 52, 62 and 72 m/s are detected to remain 320, 315, 310 and 308 K, respectively. It may be witnessed that there is no such significant decrease in temperature from spout strength of 62 to 72 m/s (involving loss of extra mechanical power). Hence, the spout strength of 62 m/s embraces rather lesser mean temperature and so, it stands as the perfect one.

Above and beyond, the identified situations are more emphasized in Table 2 alongside figure 8. Together express the difference in extreme temperature on the chosen plate for varying spout strength. Further, this earmarks the untouched ideal instance of 62 m/s spout strength conforming the optimum temperature of 310 K on the chosen plate equally recognizable from the itemized table/graph.

Table 2. Spout Strength With Extreme Temperature Over Chosen Plate.

Spout Strength (m/s)	Extreme Temperature (K)
42	320
52	315
62	310
72	308

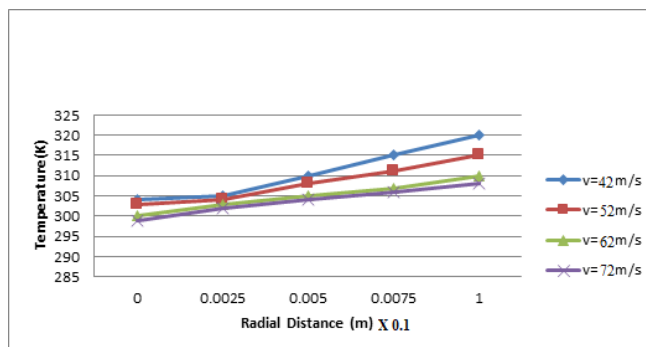


Figure 7. Temperature vs. radial distance

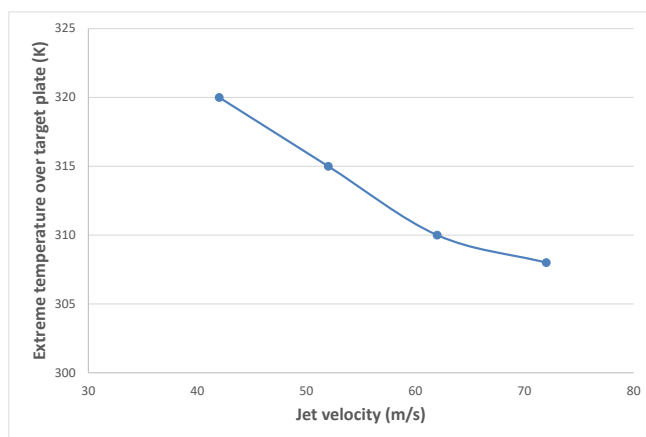


Figure 8. Spout strength vs. extreme temperature over chosen plate

**V. CONCLUSION**

Present investigation get a message to the impact of spout strength aimed at spout impact cooling through water-Al<sub>2</sub>O<sub>3</sub> nanofluid. CFD codes got established to compute the governing equalities of mass, force and drive for envisaging the thermal issues. CFD codes got executed through water-Al<sub>2</sub>O<sub>3</sub> nanofluid spouts to envisage thermal issues on the chosen plate. It uses 3 mm nozzle dimension, 5 mm nozzle to plate distance and varying spout strengths of 42, 52, 62 and 72 m/s. As projected from every temperature arena, the temperature gently

grows from spout impact spot on chosen plate along centrifugally peripheral course. This could stand because of thermal outflow using water-Al<sub>2</sub>O<sub>3</sub> nanofluid. The developments of temperature disparities alongside the radial course aimed at the identified cases are really similar.



Still, the extreme temperatures over the chosen plate for situations with spout strengths of 42, 52, 62 and 72 m/s are detected to remain 320, 315, 310 and 308 K, respectively. It may be witnessed that there is no such significant decrease in temperature from spout strength of 62 to 72 m/s (involving loss of extra mechanical power). Hence, the spout strength of 62 m/s embraces rather lesser mean temperature and so, it remains as the perfect one.

## ACKNOWLEDGMENT

The essential support from VSSUT Burla for realizing this investigation is greatly acknowledged. Indeed, the author is grateful to the reviewers and journal editorial board for their meticulous and insightful reviews to this article.

## REFERENCES

1. N. K. Kund, P. Dutta, 2010, Numerical simulation of solidification of liquid aluminium alloy flowing on cooling slope, *Trans. Nonferrous Met. Soc. China*, Vol. 20, pp. s898-s905.
2. N. K. Kund, P. Dutta, 2012, Scaling analysis of solidification of liquid aluminium alloy flowing on cooling slope, *Trans. Indian Institute of Metals*, Vol. 65, pp. 587-594.
3. N. K. Kund, 2014, Influence of melt pouring temperature and plate inclination on solidification and microstructure of A356 aluminum alloy produced using oblique plate, *Trans. Nonferrous Met. Soc. China*, Vol. 24, pp. 3465-3476.
4. N. K. Kund, 2015, Influence of plate length and plate cooling rate on solidification and microstructure of A356 alloy produced by oblique plate, *Trans. Nonferrous Met. Soc. China*, Vol. 25, pp. 61-71.
5. N. K. Kund, P. Dutta, 2015, Numerical study of solidification of A356 aluminum alloy flowing on an oblique plate with experimental validation, *J Taiwan Inst. Chem. Ers.*, Vol. 51, pp. 159-170.
6. N. K. Kund, P. Dutta, 2016, Numerical study of influence of oblique plate length and cooling rate on solidification and macrosegregation of A356 aluminum alloy melt with experimental comparison, *J. Alloys Compd.*, Vol. 678, pp. 343-354.
7. N. K. Kund, 2018, Effect of tilted plate vibration on solidification and microstructural and mechanical properties of semisolid cast and heat-treated A356 Al alloy, *Int. J. Adv. Manufacturing Technol.*, Vol. 97, pp. 1617-1626.
8. N. K. Kund, 2019, EMS route designed for SSM processing, *International Journal of Engineering and Advanced Technology*, Vol. 8, pp. 382-384.
9. N. K. Kund, 2019, Cooling slope practice for SSF technology, *International Journal of Engineering and Advanced Technology*, Vol. 8, pp. 410-413.
10. N. K. Kund, 2019, Comparative ways and means for production of nondendritic microstructures, *International Journal of Innovative Technology and Exploring Engineering*, Vol. 8, pp. 534-537.
11. N. K. Kund, 2019, Simulation of electronics cooling deploying water-zinc oxide nanofluid, *International Journal of Recent Technology and Engineering*, Vol. 7, pp. 1076-1078.
12. N. K. Kund, 2019, Numerical studies on fuel cell cooling introducing water-copper nanofluid, *International Journal of Recent Technology and Engineering*, Vol. 7, pp. 1079-1081.
13. N. K. Kund, 2019, Computational modeling of fuel cell expending water-zinc oxide nanofluid, *International Journal of Innovative Technology and Exploring Engineering*, Vol. 8, pp. 424-426.
14. N. K. Kund, 2019, Investigations on modeling and simulation of electronics cooling exhausting water-aluminum nanofluid, *International Journal of Innovative Technology and Exploring Engineering*, Vol. 8, pp. 660-663.
15. N. K. Kund, 2019, Numerical study on effect of nozzle size for jet impingement cooling with water-Al<sub>2</sub>O<sub>3</sub> nanofluid, *International Journal of Engineering and Advanced Technology*, Vol. 8, pp. 736-739.
16. N. K. Kund, 2019, Experimental investigations on impacts of nozzle diameter on heat transfer behaviors with water jet impingement, *International Journal of Engineering and Advanced Technology*, Vol. 8, pp. 745-748.
17. N. K. Kund, 2019, Comparative CFD studies on jet impingement cooling using water and water-Al<sub>2</sub>O<sub>3</sub> nanofluid as coolants, *International Journal of Innovative Technology and Exploring Engineering*, Vol. 8, pp. 545-548.

18. N. K. Kund, 2019, Experimental studies on effects of jet Reynolds number on thermal performances with striking water jets, *International Journal of Innovative Technology and Exploring Engineering*, Vol. 8, pp. 2195-2198.
19. N. K. Kund, D. Singh, 2019, CFD studies on heat transfer and solidification progress of A356 al alloy matrix and Al<sub>2</sub>O<sub>3</sub> nanoparticles melt for engineering usages, *International Journal of Innovative Technology and Exploring Engineering*, Vol. 8, pp. 2043-2046.
20. N. K. Kund, S. Patra, 2019, Simulation of thermal and solidification evolution of molten aluminum alloy and SiC nanoparticles for engineering practices, *International Journal of Innovative Technology and Exploring Engineering*, Vol. 8, pp. 2047-2050.

## AUTHORS PROFILE



**Dr. N. K. Kund** has obtained both M.Tech. & Ph.D. in Mechanical Engineering from Indian Institute of Science Bangalore. He has also obtained B.Tech.(Hons) in Mechanical Engineering from IGIT Sarang, Utkal University Bhubaneswar. He has published several research papers in international journals and also guided many research scholars, besides, wide teaching and research experience. He is presently working as Associate Professor in the Department of Production Engineering, VSSUT Burla (A Government Technical University).