

# Strength characteristics of Quaternary Mix Concrete



P. Bhuvaneshwari, T.Pavaleesh

**Abstract:** By handling the cement, bagasse ash, silica fume and metakaolin as partial replacement of cement a quaternary mix concrete could be achieved. Various percentages of replaced materials were considered for analysis. These three different materials consist of high amount of alumina ion and silica percentage. Use of these materials enhances the microstructure of concrete and helps to attain less permeable concrete. Physical and chemical properties of materials analyzed, and partially replaced with cement in different proportions such as HSC [5B, 10B, 15B, 20B] and HSC [5S, 10S, 15S, 20S] and HSC [5M, 10M]. The cubes of [100mm x 100mm x 100 mm] size were cast and tested. After confirming the characteristic compressive strength from cubes, optimum values (HSC 10B, HSC 15S and HSC 5M) has been taken. These values have been mixed up into three propositions (QBSM1, QBSM2 and QBSM3). Compressive strength results show that optimum percentage was found to be QBSM2 (10% SCBA+ 10% SF + 5% MK).

## I. INTRODUCTION

### 1.1 General

Cement (OPC) is a major construction and binding material globally. Earlier studies have been concentrated on bagasse ashes, silica fume and metakaolin to study their cementitious properties and their suitability as cementitious binders. The eligibility of using sugarcane bagasse ash as a mineral admixture in the production of Ultra High strength concrete (UHSC) was studied elaborately[1]. The properties of concrete with mineral admixture in terms of compressive strength, heat of hydration, drying shrinkage and durability was concentrated [2]. Investigation was carried out for the compressive strength and drying shrinkage properties of self-compacting concretes containing one, two and three types of mineral admixtures for partial replacement of cement. It was found that the drying shrinkage got decreased with the use of fly ash, granulated blast furnace slag, and metakaolin [3]. Mechanical and durable properties with different replacement levels of cement with silica fume and metakaolin was concentrated. It was reported that increases in strength and durability performance of blended cement was noted [4]. Similar studies were carried out in earlier research for quantifying the performance of blended cement in different conditions [5,6,7,8].

### 1.2 Research significance

Nearly tons of CO<sub>2</sub> is released from every cement manufacturing industry which is very harmful to environment since it is a major source of greenhouse gases which cause global warming.

From the earlier studies it was concluded that SCBA, silica fume and metakaolin could be effectively used for replacing the cement in percentages. These paper aims for combining the mineral admixture to form quaternary mix concrete to give high ultimate compressive strength than normal concrete mix of grade M60. The effective combination of mineral admixtures for partial replacement of cement to achieve a quaternary mix was concentrated.

## I. METHODOLOGY

### 2.1 METHODOLOGY

Mix proportion arrived for M60 concrete was 1:1.14: 2.37 with W/C ratio 0.25[9]. Total 72 specimens of cube (100 mm x 100 mm x 100 mm) were cast for checking the compressive strength. Prior to curing the cubes were tested till failure Compression Testing Machine (CTM) of 3000 kN capacity. For all the combinations the beam specimens (1200 mm x 100 mm x 150 mm) were cast to test for stress-strain characteristics.



Fig 2 Compressive test on specimens

Table 1 Different mix propositions for replacement material

S.No	Mix ID	Cement	Mineral admixtures	Fine agg.	Coarse agg	W/B ratio
1.	HSC 5B	475	21.3	550	1025	0.25
2.	HSC 10B	450	42.67	550	1025	0.25
3.	HSC 15B	425	64.01	550	1025	0.25
4.	HSC 20B	400	85.35	550	1025	0.25
5.	HSC 5S	475	17.99	550	1025	0.25
6.	HSC 10S	450	35.85	550	1025	0.25
7.	HSC 15S	425	53.74	550	1025	0.25
8.	HSC 20S	400	71.65	550	1025	0.25
9.	HSC 5M	475	18.31	550	1025	0.25
10.	HSC 10M	450	36.65	550	1025	0.25

Manuscript published on 30 September 2019.

\*Correspondence Author(s)

P. Bhuvaneshwari, Ph.D. (Structural Engineerig), Assistant Professor, School of Civil Engineering, SASTRA Deemed to be University.

T.Pavaleesh, Graduate Student (Structural Engineering) School of Civil Engineering, SASTRA Deemed to be University.

© The Authors. Published by Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP). This is an open access article under the CC-BY-NC-ND license <http://creativecommons.org/licenses/by-nc-nd/4.0/>.

II. MATERIALS USED

3. Materials and Methods

Ordinary Portland cement of grade 53, Potable water, M-sand, coarse aggregates. Sugarcane bagasse ash, silica fume and metakaolin were used as constituents of concrete as a partial replacement of cement.

3.1 Cement

Ordinary Portland cement of grade 53 procured from local suppliers was used for the investigation. The cement being a binder material helps to bind the fine and coarse aggregate together and also filling the voids between aggregates. Cement had a specific gravity of 3.1 with consistency 31% and setting time as 32 minutes [9].

3.2 Fine aggregate

Locally procured sand has been used as fine aggregate. The fineness modulus was 2.65, confirming to zone-II as per IS: 383-1970. [10]

3.3 Coarse aggregate

Coarse aggregate of size 20mm were collected from local quarries. The aggregates have been tested as per IS: 2386 (part 1)-1963[11] and surface quality description of the aggregate are classified as per IS: 383-1970 [10].

3.4 Sugarcane bagasse ash

The sugarcane bagasse ash is a waste material which is being used as a biofuel and also in the production of pulp and building materials. The bagasse and ash are as shown in Fig 3(a) and 3(b) respectively.

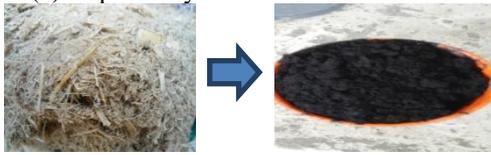


Fig 3(a) Bagasse

Fig 3(b) Bagasse ash

The extraction of bagasse ash from bagasse (treatment at 500°C) is shown in the above Figures 3(a) and 3(b). Bagasse is burnt around 500°C in a controlled process to use its maximum fuel value. EID parry India Ltd, located in the city of Nellikuppam (Cuddalore), Tamilnadu. The various chemical composition of bagasse is listed in the following Table 2.

Table 2 Chemical Composition of Bagasse ash

S.NO	Composition	Mass (%)
1	Silicon Dioxide(SiO <sub>2</sub> )	78.34
2	Aluminium (Al <sub>2</sub> )	8.55
3	Ferrous Oxide(Fe <sub>2</sub> O)	3.23
4	Potassium Oxide(K <sub>2</sub> O)	3.46

3.5 Silica fume

The amorphous polymorph of silicon dioxide is an ultrafine powder collected as a by-product of the silicon and ferrosilicon alloy production. The shape of the particles is spherical with average diameter of 150 nm. The composition is as shown in Table 3.

Table 3 Chemical Composition of Silica Fume

Chemical composition	Percentage		
	Portland	Silicious	Calcareous
SiO <sub>2</sub>	21.9	52	35
Al <sub>2</sub> O <sub>3</sub>	6.9	23	18
Fe <sub>2</sub> O <sub>3</sub>	3	11	6
CaO	63	5	21

3.6 Metakaolin

The material from calcination of kaolinite. The particle size of metakaolin is less compared to cement particles, but not finer than silica fume. The chemical composition is shown in Table 4.

Table 4 Chemical Composition of Metakaolin

CHEMICAL COMPOSITION	PERCENTAGE
SILICA (SiO <sub>2</sub> )	54.3
ALUMINA (AL <sub>2</sub> O <sub>3</sub> )	38.3
FERRIC OXIDE (FE <sub>2</sub> O <sub>3</sub> )	42.8

III. EXPERIMENT AND TEST RESULTS

4. Results and Discussion

Conventional concrete was partially replaced for cement with sugarcane bagasse ash, silica fume and metakaolin. Strength and durability characteristics of quaternary mix concrete are compared.

4.1 Fresh concrete properties

4.1.1 Slump Cone Test

Slump cone test has been carried out to check the workability of concrete mixes. The slump value for different mixes is as shown in the following Table 5.

Table 5 Slump value for different mix

S.NO	Content	Slump value (mm)
1	0% (CC)	50
2	5% (HSC 5B,HSC5S,HSB5M)	85-90
3	10% (HSC 10B,HSC10S,HSB10M)	95-100
4	15% (HSC 15B,HSC15S)	120-125
5	20% (HSC 20B,HSC20S)	128-130

From the above result, it was found that increase in percentage of bagasse ash, silica fume and metakaolin increases the workability.

4.2 Hardened concrete properties

The characteristic compressive strength was checked for the different mixes (HSC5B, HSC10B, HSC15B, HSC20B, HSC5S, HSC10S, HSC15S, HSC20S, HSC5M, HSC10M) by conducting compression test in CTM of 300 kN capacity. The

quaternary mix was fixed based on the optimum percentage of all the above mentioned combinations.

4.2.1 Compressive strengths

The compressive strength of different mixes are given in Table 6 and comparison is carried out in Figure 4. Even though the replacement resulted in decrease in target strength, the values were confirming with the characteristic strength.

Table 6 Compressive strengths of conventional and quaternary mix concrete [10]

Type of concrete	% of replacement	Average Compressive strength(N/mm <sup>2</sup> )		
HSC 5B, 5S, 5M	5	51.3(B)	34.17(S)	50.8(M)
HSC 10B, 10S, 10M	10	67.8(B)	34.90(S)	49.90(M)
HSC 15B, 15S	15	47.50(B)		57.02(S)
HHSC 20B, 20S	20	39(B)		50.6(S)

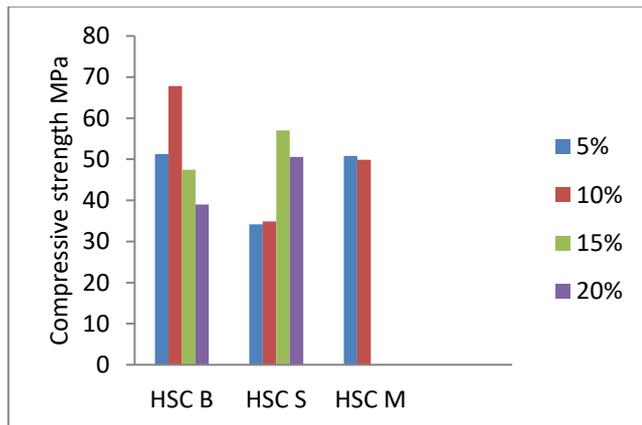


Fig. 4 Comparison of compressive strength of different mixes The comparison shows that the values were higher for mix with 10% SCBA, 15% Silica fume and 5% metakaolin .The similar percentages were fixed for the optimum quaternary mix.

4.2.2 Compressive Strength for optimum mix

The optimum composition were arrived with the combinations of mineral admixtures as follows  
i) 5% SCBA+ 10% SF + 5% MK (QBSM1)  
ii) 10% SCBA + 10% SF + 5% MK (QBSM2)  
iii) 10% SCBA + 15% SF + 5% MK (QBSM3).Cube specimens were cast and moist cured for 28 days. Cured specimens were subjected to compressive loading and the compressive strength was calculated. The values are as shown in Table 7.

Table 7. Compressive strength values for optimum mixes

S.No	Mix ID	Failure load (kN)	Compressive strength (kN/m <sup>2</sup> )
1.	QBSM 1	437	43.7
2.	QBSM 2	526	52.6
3.	QBSM 3	490	49.00

Among the three different mixes, QBSM 2 mix was found to give confirming strength. The same mix was adopted to cast specimens for durability studies to check the permeability of the dense concrete mix.

IV. CONCLUSION

The strength obtained for concrete cubes specimens with partial replacement of sugarcane bagasse ash, silica fume and metakaolin in different percentages were studied. Results were compared and following conclusions are arrived:

- Partial replacement of cement with 10% sugarcane bagasse ash (HSC10B), 15% silica fume (HSC15S) and 5% metakaolin (HSC5M) in plain cement concrete increases its strength under compression.
- The increase of replacement percentage to 15% sugarcane bagasse ash (HSC15B), 20% silica fume (HSC20S) and 10% metakaolin (HSC10M) decreased the compressive strength characteristics.
- This may be due to the fact that the quantity of pozzolonic silica content in the mix is higher than the amount required to combine with excess lime, during the process of hydration. This may be the reason for leaching out of excess silica thus resulting in decreased strength characteristics.
- Among the specimens cast using the different combinations of optimum percentages of mineral admixtures (QBSM1, QBSM2 and QBSM3), the strength characteristics for QBSM2 was found to be confirming with the control concrete. Apart for achieving the strength the usage of cement was also brought down considerably.

REFERENCES

1. A. Rajasekar, K. Arunachalam “Durability characteristics of Ultra High Strength Concrete with treated sugarcane bagasse ash” Construction and Building Materials 171 (2018) 350-356.
2. A. Bahurudeen, Manu Santhanam “Performance evaluation of sugarcane bagasse ash blended cement in concrete” Cement and Concrete Composites 59 (2015) 77-88.
3. Erhan Guneyisi, Mehmet Gesoglu, Erdogn Ozbay “Strength and drying shrinkage properties of self-compacting concrete incorporating multi-system blended mineral admixtures” Construction and Building materials 24 (2010) 1878-1887.
4. Mohammed Seddik meddah, Mohamed A. Ismail, Sherif El-Gamal, Heni Fitriani “Performance evaluation of binary concrete designed with silica fume and metakaolin” Construction and Building materials 166(2018) 400-412.
5. A Abd Elaty, A Metwally , Mariam Farouk Ghazy “Performance Of Portland Cement Mixes Containing Silica Fume And Mixed With Lime Water” CHosing and Bilding National Research Cenerter 10(2014) 247-257.
6. Jianhe Xie, Liang Huang, Yongchang Guo, Zhijian Li, Chi Fang “Experimental Study On The Compressive And Flexural Behavior Of Recycled Aggregate Concrete Modified With Silica Fume And Fibers” Construction and Building materials 178(2018) 612-623.
7. D. Pedro, J.de Brito, L.Evangelista “Evaluation of high performance concrete with recycled aggregates: Use Of densified silica fume as cement replacement” Construction and Building materials 147(2017) 803-814.
8. Julian Petermann Moretti, Sandra Nunes, Almir Sales “Self-compacting concrete incorporating sugarcane bagasse ash” Construction and Building materials 172 (2018) 635-649.
9. Bureau of Indian Standards, IS 12269-2013, Ordinary Portland Cement – Specification, New Delhi.
10. IS 383: Specification for Coarse and Fine Aggregate from natural sources for concrete, BIS-New Delhi.
11. IS 10262-2009: Procedure and Calculations for Concrete Mix Design.
12. Bureau of Indian Standards, IS 516-1959, Methods of Tests for Strength of Concrete, New Delhi.



# Strength characteristics of Quaternary Mix Concrete

## AUTHORS PROFILE

**P.Bhuvaneshwari** Ph.D. (Structural Engineering), Assistant Professor,  
School of Civil Engineering, SASTRA Deemed to be University.  
Publication-14 International Journals

**T.Pavaleesh**, Graduate Student (Structural Engineering) School of Civil  
Engineering, SASTRA Deemed to be University.