

# Effect of Mixing Ratios in a Batch Reactor for Biological Hydrogen Production



C. Anantharaj, V. Arutchelvan, N. Ashok Kumar

**Abstract:** This study was to evaluate the cause on the production of bio-hydrogen utilizing Distillery Spent Wash (DSW) and starch mixed wastewater in various mixing ratios under dark fermentation conditions with varying Hydraulic Retention Time in a batch reactor. The pH was kept constantly at 5.5 throughout the study. Thus the hydrogen production investigated in the batch reactor for following Hydraulic Retention Time 24h, 16h, 12h and 8h, the results revealed an extended and steady period of reactor operation with hydrogen percent in the biogas and hinders the methane production. The perfect mixing ratios and Hydraulic Retention Time were seen to be 50:50 (DSW: Starch wastewater) and 16h to 12h HRT with contrasting cumulative hydrogen yields of 3256.5ml and 2674.3ml with specific maximum production of hydrogen rate 468ml/L/d as well as 236.64ml/L/d with the best biomass improvement combination of 4.7g/l and 4.5g/l. The maximum Chemical Oxygen Demand removal rates of 68 and 50 percentage for the optimum HRT of 16h and 12h.

**Keywords:** Batch reactor; DSW: Starch wastewater; Biomass concentration; COD removal; Hydrogen production.

## I. INTRODUCTION

In current years, non-renewable energy usage has driven specialists to check for optional biofuels. Solid waste could be the obvious choice amongst the most wellsprings of clean biofuel production. Hydrogen could be utilized as an elective biofuel instead of petroleum products, which could be generated using biological hydrogen production methods. Energy content is high in hydrogen; hence it's become energy effective fuel and leaves water as its residue. In room temperature conditions generation of such productive fuel from very low energy contribution would be a huge environmental benefit [1]. So many decades, hydrogen production was achieved from a wide extent of resources, through various generation innovations, where most of it has been generated from non-renewable feedstock, for example, oil, coal, petroleum and gas [2]. Coal gasification and thermolytic burning is most utilized strategy for hydrogen production that contaminates the air due to the by production of ozone depleting substances (GHGs),

Revised Manuscript Received on October 30, 2019.

\* Correspondence Author

C. Anantharaj\*, Department of Civil Engineering, Annamalai University, Annamalainagar, Tamilnadu, India. Email: nnthraj9@gmail.com

V. Arutchelvan, Department of Civil Engineering, Annamalai University, Annamalainagar, Tamilnadu, India. Email: arul.au@gmail.com

N. Ashok Kumar, Department of Civil Engineering, Annamalai University, Annamalainagar, Tamilnadu, India. Email: ashokviji.2002@gmail.com

© The Authors. Published by Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP). This is an open access article under the CC-BY-NC-ND license <http://creativecommons.org/licenses/by-nc-nd/4.0/>

thus contrarily impacts the supportability of hydrogen as a fuel asset. The finest decision in contrast to these "filthy" production methods is bio hydrogen [3].

A serious concern for most of the nations is the disposal of industrial wastewater in an improper way, where the wastewater is complex in nature produced with the restricted advancements towards evacuate contaminations has further aggravated the problem. Sugar manufacturing industries plays major role in contaminating both the land and water bodies by releasing wastewater with high quantity of solids, COD, BOD<sub>5</sub>, Sulfate, Nitrate, Calcium, Chloride and Magnesium[4], [5].

From the sugar manufacturing industries distillery spent wash was found to be the most multifaceted with troublesome wastewater effluent and having strong organic matter with COD ranges from 80000 to 160000mg/l, high bursting debris content, temperature level high, acidity low from pH 3.7 to 4.5 and large amount of in-organic salt in dissolved form [6], [7], [4]. Spent wash generated from sugar industries is the most troublesome surplus wastewater item, which is very much difficult to dispose since the pollutants are environmentally not friendly [9]. These kinds of wastewater pollute the water bodies and hence not suitable for human consumption and amphibian life [5], [10]. In the absence of proper dilution and treatment, sugar industry wastewater when directly used for crop yield water system would fundamentally restrain the seedling development and seed germination [12]. Another case is cassava starch production, where around 5 to 7 L of wastewater generated from 1 kilo of new root [12]. Cassava starch wastewater (CSW) exist as an appropriate substrate in bioreactors for bio-hydrogen production because of its composition of biodegradable starches, nitrogen, magnesium, sodium, phosphorus, calcium, iron, zinc, potassium, nickel and copper [13]. Hydrolysis is a process where the complex typical mixes are changed over (hydrolyze) by fermentative microscopic organisms to basic monomers, for example, unsaturated fats are converted into monosaccharides and amino acids. Next, in acidogenesis process, these monomers included sugars will be converted further to acidic destructive derivation, hydrogen (H<sub>2</sub>) and carbon dioxide (CO<sub>2</sub>) [14]. Bio-hydrogen production utilizing inoculation of mixed anaerobic sludge in the acidogenic reactors comparing with pure cultures. Its having better adjusts to natural stresses which include supplement constraint, pH changes and temperature changes. Anaerobic mixed sludge consists of both hydrogen consuming and hydrogen producing microscopic organisms [15].

## Effect of Mixing Ratios in a Batch Reactor for Biological Hydrogen Production

For hindering the H<sub>2</sub> consumers during dark fermentation with mixed microbial sludge, the following steps are essential which include homoacetogens, hydrogenotropic methanogens, lactic destructive organisms, sulfate reducers and propionate conveying microorganisms [16]. Hence, pre-treatment is regularly carried out to upgrade the mixed sludge for enhancing the hydrogen producing microscopic organisms in addition to remove the hydrogen utilizing microscopic organisms. Heat pre-treatment of sludge is the well-known method generally utilized [17], [18].

The present investigation was contemplated to production of bio-hydrogen using mixed Distillery Spent Wash (DSW) and starch wastewater in various mixing ratios under dark fermentation conditions. Diluted DSW and Starch wastewater was utilized as a substrate and inoculums used as pre-treated anaerobic digested sludge. The inoculums to substrate proportion was fixed as 1:5 (Anaerobic sludge: substrate), with HRT maintained from 8h to 24h under mesophilic conditions (35°C). The production of bio hydrogen, COD removal effectiveness along with the optimum HRT was assessed.

### II. MATERIALS AND METHODS

#### A. Experimental Set-up

Batch reactor studies were conducted using borosil glass bottles with 1L volume of each bottle. To sustain the reactor in anaerobic conditions, the bottle opening was tightly closed with rubber cork. For biogas collection and sampling, two ports were provided. Water displacement unit was fixed with the reactor for measuring biogas evolved. The reactor was sealed with 100ml of pre-heat treated seed sludge and 600ml of mixed distillery spent wash and Starch Wastewater (different mixing ratios), where the space present above filled sludge and mixed wastewater acts as a gas collection chamber. Batch reactor bottles were purged by Nitrogen to attain anaerobic environment. The experiment studied at

constant pH of 5.5 for different HRT and the mixing ratios were optimized at temperature (35±1°C). The parameters pH, COD, Biogas and Biomass concentration were monitored daily.

#### B. Seed inoculums

Mixed anaerobic digested sludge acquired from the anaerobic digester unit treating distillery wastewater was utilized as a seed in the batch reactor. The raw anaerobic digester sludge comprises of vast microflora. The collected anaerobic sludge was exposed to pre-treatment in order to hinder the hydrogen consumer's activity and also to yield the spore forming anaerobes which are responsible for production of hydrogen. The sludge was heated at (100°C for 2 hours) to harvest sp. Clostridium type bacteria which accountable for the production of hydrogen as well as to suppress methanogens, homoacetogenes, and other unfavorable species of bacteria for hydrogen production [17]. The production of different metabolites associated with the diversity of microorganisms which are existent in the selected microbial consortium once the thermal pre-treatment completed it hinders non spore forming microorganisms. [18], [19]. After the pre-treatment, the seed sludge was inoculated in the reactor using the seed to substrate ratio of 1:5. (The heat shock pre-treatment employed as the main inoculum pre-treatment method when complex wastes used as a substrate [20], [17], [21], [22].

#### C. Distillery spent wash and starch wastewater

The distillery spent wash was collected from sugar industry in Tamil Nadu and to avoid the wastewater from biodegradation due to microbial action; the wastewater was stored at a temperature less than 4°C. The Cassava starch wastewater collected from a cassava flour factory in Tami Nadu.

Table 1 Characteristics of mixed distillery spent wash and starch wastewater

Para meters	10;90	20;80	30;70	40;60	50;50	60;40	70;30	80;20	90;10
pH	5.20	4.86	4.85	4.83	4.72	4.65	4.62	4.53	4.50
COD	16800	16500	16700	16800	19200	18200	18600	17600	17200
TS	11300	11500	11600	11700	18200	17600	13800	12600	12300
TSS	4900	4800	4600	4800	10900	9200	8200	7200	5600
TDS	6400	6700	7000	6900	7300	8400	5600	5400	6700
MLSS	6800	6200	6500	6300	8600	7800	6300	6200	6800
MLVSS	5200	4700	4200	4600	6800	5800	4200	4700	4200

All Parameters are in mg/L except pH


**D. Analytical procedure**

The biogas production rate and pH was regularly monitored, the samples from influent and effluent were collected and examined for pH, total solids (TS), Total Suspended Solids (TSS), Total Dissolved Solids (TDS), COD as per the standard procedure [24]. Stable state condition was achieved for each HRT and it was vindicated with measured biogas and COD effluent. To estimate the process performance of the Batch reactor systems, the experimental data arrived from the steady state was considered. Water displacement method was employed to measure the total biogas evolved with biological hydrogen production percentage estimated by GAS chromatography.


**III. RESULTS AND DISCUSSION**

**A. Hydrogen production vs COD removal in different mixing ratios**

During the first series of experiment, the effects of mixing ratios with respect to HRT were investigated. The Batch acidogenic reactor was operated to optimize the mixing ratios with respect to HRT. The reactor was initially started with 24h HRT and further the HRT was gradually reduced to 16h, 12h, and finally 8h HRT ensuring that in each HRT the steady state was reached. It is also noted that during the operation of the reactor no methane was detected as confirmed by GAS measuring sensor unit which consists of H<sub>2</sub>, CO<sub>2</sub> and CH<sub>4</sub> measuring sensor.

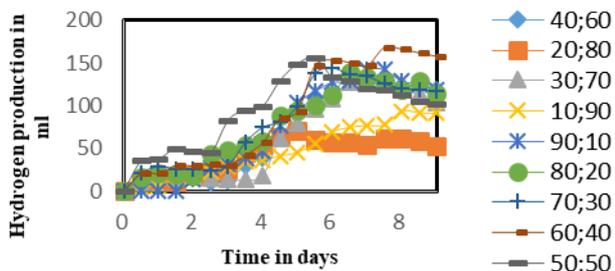


**Fig.1 Hydrogen production in different mixing ratio at 24h HRT**

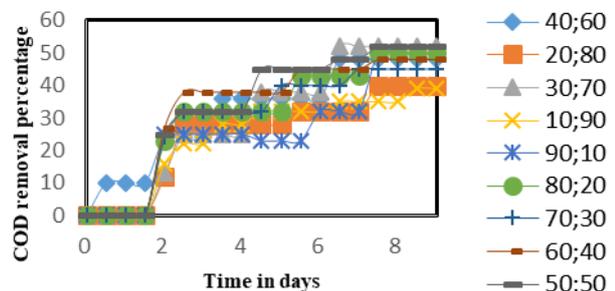


**Fig.2 COD removal percentage in different mixing ratio at 24h HRT**

In figure 1 and 2 the hydrogen production rate with respect to COD removal percentage at 24h HRT with different mixing proportion were presented. The hydrogen production rates increase when the HRT decreases. At an HRT of 24h, the cumulative hydrogen production of 1754.63ml and maximum rate of specific hydrogen production was about 156.6ml/L/d were achieved with 52% COD removal which gradually

increases while the HRT decreased. Thus, the highest production of hydrogen and COD removal percentage were observed at HRT 16h with cumulative H<sub>2</sub> production of 3256.4ml and maximum rate of specific hydrogen production 468ml/L/d on 7<sup>th</sup> day of batch reactor operation. This is maximum when with the previous study of [25], where about 429.72ml/L/d rate of specific hydrogen production achieved. The results from the batch reactor runs with HRT16h exist to be high when compared with the reactor runs with HRT 24h, 12h and 8h as mentioned in the figure 3 and 4.

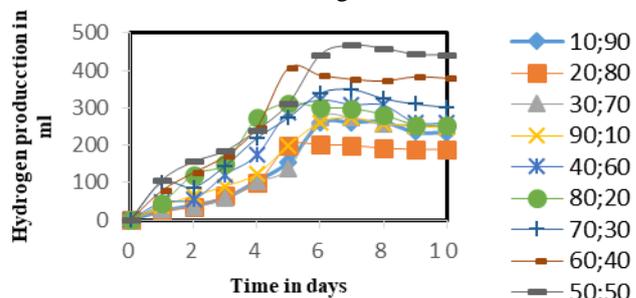

**Fig.3 Hydrogen production in different mixing ratio at 16h HRT**

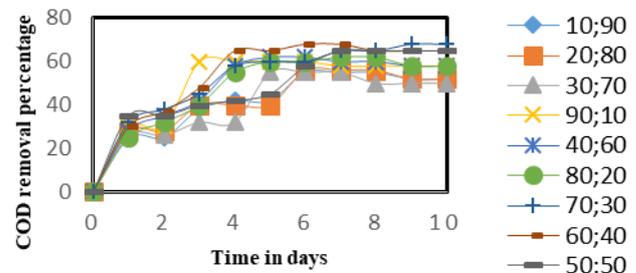

**Fig.4 COD removal percentage in different mixing ratio at 16h HRT**

Batch reactor runs with the nine mixing ratios of 10:90, 20:80, 30:70, 40:60, 50:50, 60:40, 70:30, 80:20, 90:10 were carried out, out of which the maximum cumulative production of hydrogen was achieved at the mixing proportion 50:50 (DSW: Starch wastewater) followed by 60:40, 70:30. This pattern of hydrogen production from the mixing ratios was similar in all cases of the HRT throughout the experimental study. The greatest hydrogen production was achieved while the reactor runs with 16h HRT with mixing ratio 50:50 (DSW: Starch wastewater). The cumulative production of hydrogen was about 3256ml and the maximum specific hydrogen rate of 468ml/L/d with COD removal of 65%. During the mixing ratio of 60:40, the cumulative H<sub>2</sub> production was 2929.8ml and specific H<sub>2</sub> rate was 406.9ml/L/d with 68% of COD removal and for 70:30, the cumulative H<sub>2</sub> production was 2450.6ml and specific H<sub>2</sub> rate was 349.2ml/L/d and 68% removal rate of COD as shown in the figure 3 and 4.

## Effect of Mixing Ratios in a Batch Reactor for Biological Hydrogen Production

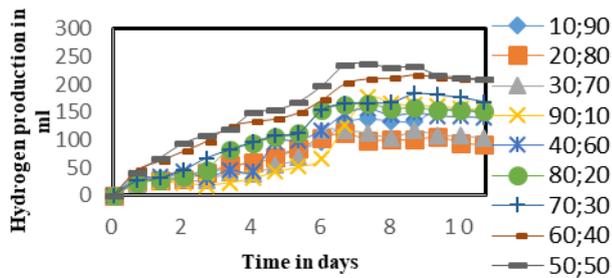


Fig.5 Hydrogen production in different mixing ratio at 12h HRT

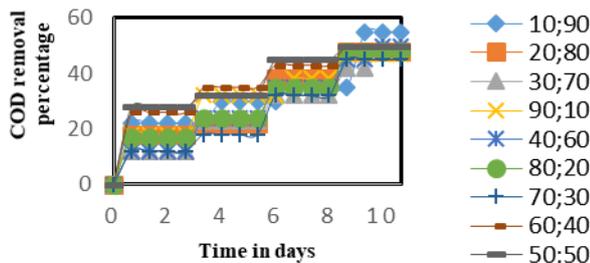


Fig.6 COD removal percentage in different mixing ratio at 12h HRT

After the reactor runs with the HRT of 24h and 16h, the reactor starts with the reducing HRT to 12h and 8h. The hydrogen production maximum with specific maximum hydrogen production rate of 2674.3ml and 236.64ml/L/d at HRT of 12h under the mixing ratio of 50:50 where COD removal rate was of 50% as shown in figure 5 and 6. This reveals the fact that hydrogen production rate increases, although the COD removal efficiency decreases at low HRTs. Finally the reactor runs with the 8 h HRT and the results obtained was 1691.95ml of cumulative hydrogen production and 132.75ml/L/d of specific maximum hydrogen production with COD removal of 43%, which is less as compared with the other HRTs which implies that hydrolysis occurs in acidogenic reactor at low HRT.

The degradation of carbohydrate or proteins or lipids may have taken place in the reactor at all HRT values tested. The importance of the pH on hydrogen production has been revealed by many experimental studies, the activities of the various enzymes would be inhibited at low pH especially the hydrogenase enzyme [26], [27]. The batch reactor was operated at constant pH 5.5. Particularly in the dark fermentation progression, the optimum pH range was kept as 5.5-6.0 in order to avoid the methanogenesis and solventogenesis [28]. The low pH ranges of 4.5-6 leads to high in acetic and butyric acids concentration, the soluble metabolites which there by affects the H<sub>2</sub> production pathways [29], [30], [31], [32], [33]. Hence, mesophilic dark fermentation, the optimum initial pH was considered as 5.5-6.0, where several studies have reported the same. The production rate of hydrogen and yield of hydrogen using pre heat treated anaerobic sludge was found to be maximum [34] as compared with pre-treated algal biomass with production rate of hydrogen and hydrogen yield was 62ml/l/d with 9.5ml/g VSS added.

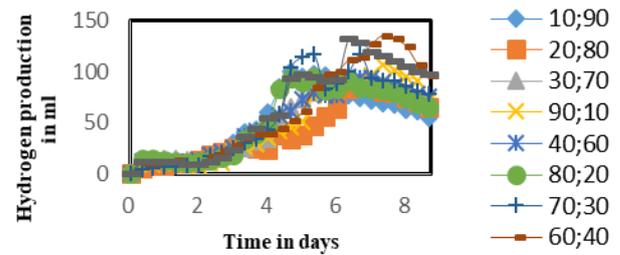


Fig.7 Hydrogen production in different mixing ratio at 8h HRT

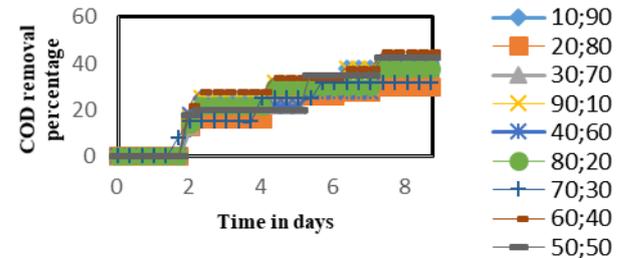


Fig.8 COD removal percentage in different mixing ratio at 8h HRT

### B. Biomass concentration in different mixing ratios at different HRT

MLVSS Mixed Liquid Volatile Suspended Solids measured as biomass concentration for various wastewater mixing proportions with different HRT 24h, 16h, 12h and 8h. It was identified that in all the HRT cases, the COD removal was achieved with gradual increase in the biomass growth. The degradation takes place with an initial biomass of 4.3 to 6.3g/l for 24h HRT, 4.2 to 6.8 g/l for 16h HRT, 4.3 to 7.2 g/l for 12h HRT and finally 4.5 to 6.5 for the batch reactor runs with 8h HRT. For the first two to three days, the biomass growth rates were low which may be due to new environmental conditions and new. Later the period of lag phase time, the microorganisms were capable to adapt to the new environmental condition and the growth of biomass was gradually improved and lastly it reaches the stable state conditions as presented in figure 9 to figure 10. The maximum biomass growth was gained at various mixing ratios 10:90, 20:80, 30:70, 40:60, 50:50, 60:40, 70:30, 80:20, 90:10 for 24h HRT were estimated. The maximum biomass growth was about 5.8g/l, for 16h HRT it was 6g/l, 5.8g/l for 12h HRT and finally 5.2g/l for 8h HRT.

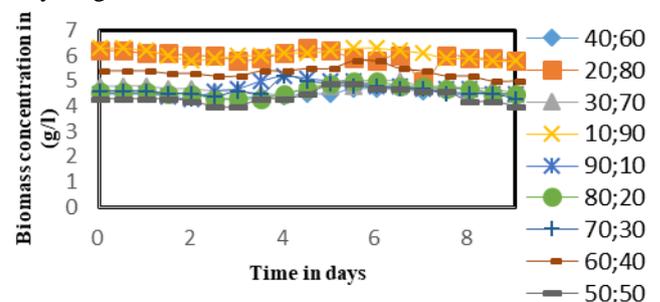


Fig.9 Concentration of biomass in different mixing ratio at 24h HRT

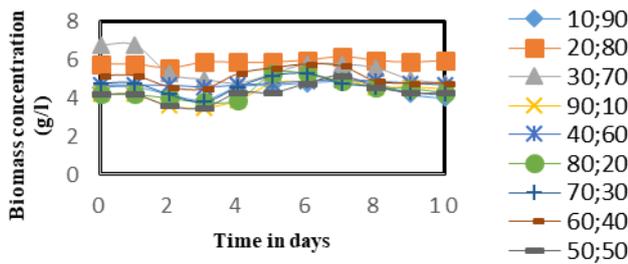


Fig.10 Concentration of biomass in different mixing ratio at 16h HRT

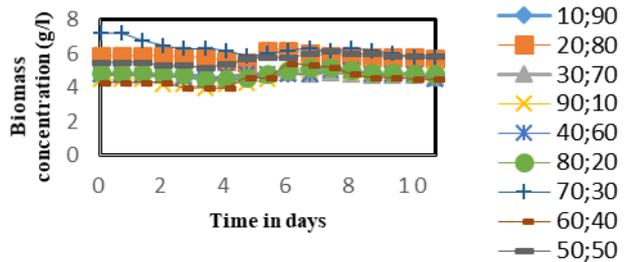


Fig.11 Concentration of biomass in different mixing ratio at 12h HRT

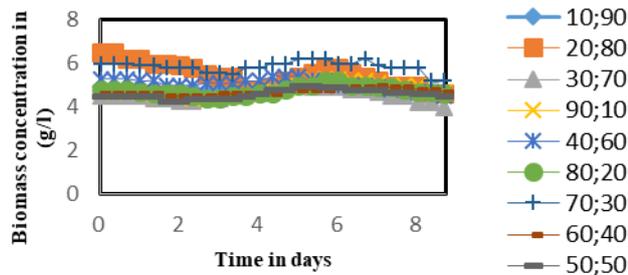


Fig.12 Concentration of biomass in different mixing ratio at 8h HRT

IV. CONCLUSION

Dark fermentation of carbohydrate rich waste are a viable source of hydrogen production and also reducing environmental pollutions Dark fermentative hydrogen production of mixed sugar DSW: starch wastewater was investigated in a batch reactor under various mixing ratios, various HRT and constant pH 5.5. The heat treated anaerobic mixed sludge was practiced as seed inoculum towards enhance the production rate of biological hydrogen. The optimal HRT range was between 16h-12h and the optimum mixing ratio for maximum hydrogen production was 50:50 (DSW: Starch wastewater). The highest hydrogen production was obtained during 16h HRT was 3256.4ml of hydrogen production with 468ml/L/d of maximum specific hydrogen and COD removal rate of 68% and maximum biomass concentration of 4.3g/l. Hence it proves that dark fermentative hydrogen production is an admirable way intended for production of hydrogen as compared to other biological systems. Though by these methods, exclusive bioenergy generation cannot be optimized, the waste discharged to the environment can be decreased.

REFERENCES

- Robledo Narvaez., Paula N., Karla M., Munoz-Paez., Hector M. Poggi-Varaldo., Elvira Rios-Leal., Graciano Calva Calva., L. Alfredo Ortega-Clemente., Noemi Rinder knecht Seijas., Carlos Estrada-Vazquez., M. Teresa Ponce-Noyola., and J., Alfredo Salazar-Montoya. "The influence of total solids content and initial pH on batch bio-hydrogen production by solid substrate fermentation of agro industrial wastes." *Journal of environmental management*, Vol. 128, 2013, pp. 126-137.
- Balat., Havva., and Elif Kirtay., "Hydrogen from biomass—present scenario and future prospects." *International journal of hydrogen energy*, Vol. 35, Issue 14, 2010, pp.7416-7426.
- Mudhoo, Ackmez, Tania Forster-Carneiro, and Antoni Sanchez. "Biohydrogen production and bioprocess enhancement: a review." *Critical reviews in biotechnology*, Vol. 31, Issue 3, 2011, pp.250-263.
- Fito, Jemal, Nurelegne Tefera, Helmut Kloos, and Stijn WH Van Hulle. "Physicochemical properties of the sugar industry and ethanol distillery wastewater and their impact on the environment." *Sugar Tech*, Vol. 21, Issue.2, 2019, pp. 265-277.
- Samuel., Sajani., and S. M. Muthukkaruppan., "Physico-Chemical Analysis of sugar Mill Effluent, Contaminated soil and its effect on seed germination of paddy (*Oryza sativa* L)." *International Journal of Pharmaceutical & Biological Archives*, Vol. 2, Issue. 5, 2011, pp. 1469-1472.
- Basu, Subhankar, Sangeeta Mukherjee, Ankita Kaushik, Vidya S. Batra, and MaliniBalakrishnan. "Integrated treatment of molasses distillery wastewater using microfiltration (MF)." *Journal of environmental management*, Vol. 158, 2015, pp. 55-60.
- Fito., Jemal., Nurelegne Tefera., and Stijn WH Van Hulle., "Adsorption of distillery spent wash on activated bagasse fly ash: kinetics and thermodynamics." *Journal of environmental chemical engineering*, Vol. 5, Issue. 6, 2017, pp. 5381-5388.
- Fito., Jemal., Nurelegne Tefera., Helmut Kloos., and Stijn WH Van Hulle., "Anaerobic treatment of blended sugar industry and ethanol distillery wastewater through biphasic high rate reactor." *Journal of Environmental Science and Health, Part A* Vol. 53, Issue. 7, 2018, pp. 676-685.
- Nataraj., Sanna Kotrappanavar., Kallappa M., Hosamani, and Tejrj M. Aminabhavi. "Distillery wastewater treatment by the membrane-based nanofiltration and reverse osmosis processes." *Water Research*, Vol. 40, Issue. 12, 2006, pp. 2349-2356.
- Hampannavar., U. S., and C. B. Shivayogimath., "Anaerobic treatment of sugar industry wastewater by upflow anaerobic sludge blanket reactor at ambient temperature." *International journal of environmental sciences*, Vol. 1, Issue. 4, 2010, pp. 631-639.
- Siddiqui., Weqar A., and Muhammad Waseem., "A comparative study of sugar mill treated and untreated effluent-a case study." *Orient J Chem*, Vol. 28, Issue. 4, 2012, pp. 1899-1904.
- Plevin., Richard., "Converting waste to energy and profit-tapioca starch power in Thailand." *Renewable energy world*, Vol. 7, 2004, pp. 74-81.
- Lucas, S. D. M., G. Peixoto, G. Mockaitis, M. Zaiat, and S. D. Gomes. "Energy recovery from agro-industrial wastewaters through bio-hydrogen production: Kinetic evaluation and technological feasibility." *Renewable energy*, Vol. 75, 2015, pp. 496-504.
- Metcalf., I. N. C. *Wastewater engineering; treatment and reuse*. McGraw-Hill, 2003.
- Wong., Yee Meng., Ta Yeong Wu., and Joon Ching Juan., "A review of sustainable hydrogen production using seed sludge via dark fermentation." *Renewable and Sustainable Energy Reviews*, Vol. 34, 2014, pp. 471-482.
- Saady., Noori M. Cata., "Homoacetogenesis during hydrogen production by mixed cultures dark fermentation: unresolved challenge." *International Journal of Hydrogen Energy*, Vol. 38, Issue. 30, 2013, pp. 13172-13191.
- Bakonyi., Peter., B. Borza., K. Orlovits., V. Simon., Nandor Nemestothy., and K. Belafi-Bako., "Fermentative hydrogen production by conventionally and unconventionally heat pretreated seed cultures: a comparative assessment." *international journal of hydrogen energy*, Vol. 39, Issue. 11, 2014, pp. 5589-5596.



# Effect of Mixing Ratios in a Batch Reactor for Biological Hydrogen Production

18. Valdez Vazquez. Idania., and Hector M. Poggi-Varaldo. "Hydrogen production by fermentative consortia." *Renewable and sustainable energy reviews*, Vol. 13, Issue. 5, 2009, pp. 1000-1013.
19. Hawkes., F. R., R. Dinsdale., D. L. Hawkes, and I. Hussy. "Sustainable fermentative hydrogen production: challenges for process optimization." *International journal of hydrogen energy*, Vol. 27, Issue. 11-12, 2002, pp. 1339-1347.
20. Alibardi., Luca., and Raffaello Cossu., "Effects of carbohydrate, protein and lipid content of organic waste on hydrogen production and fermentation products." *Waste management*, Vol. 47, 2016, pp. 69-77.
21. Kumar., Gopalakrishnan., PeterBakonyi., Periyasamy Sivagurunathan., NándorNemestóthy, KatalinBélafi-Bakó, and Chiu-Yue Lin. "Improved microbial conversion of de-oiled Jatropha waste into biohydrogen via inoculum pretreatment: process optimization by experimental design approach." *Biofuel Research Journal*, Vol. 2, Issue. 1, 2015, pp. 209-2014.
22. Liu., Dawei, Dapeng Liu., Raymond J. Zeng, and Irini Angelidaki. "Hydrogen and methane production from household solid waste in the two-stage fermentation process." *Water research*, Vol. 40, Issue. 11, 2006, pp. 2230-2236.
23. Baghchehsaraee., Bitaa., George Nakhla, DimitreKaramanev, and ArgyriosMargaritis. "Fermentative hydrogen production by diverse microflora." *international journal of hydrogen energy*, Vol. 35, Issue. 10, 2010, pp. 5021-5027.
24. APHA. (2005). Standard methods for examination of water and wastewater. 21st ed. Washington, DC, USA: American Public Health Association.
25. Wang, Shaojie, Zhihong Ma, and Haijia Su. "Two-step continuous hydrogen production by immobilized mixed culture on corn stalk." *Renewable energy*. Vol. 121, 2018, pp.230-235.
26. Dong-Jie, Niu, Wang Jing-Yuan, Wang Bao-Ying, and Zhao You-Cai. "Effect of Mo-containing additives on biohydrogen fermentation from cassava's stillage." *International Journal of Hydrogen Energy*. Vol. 36, Issue. 9, 2011, pp. 5289-5295.
27. Abreu, A. A., Anthony S. Danko, J. C. Costa, E. C. Ferreira, and M. M. Alves. "Inoculum type response to different pHs on biohydrogen production from L-arabinose, a component of hemicellulosic biopolymers." *international journal of hydrogen energy*. Vol. 34, Issue. 4, 2009, pp. 1744-1751.
28. Pandey, Ashok, S. Venkata Mohan, Jo-Shu Chang, Patrick C. Hallenbeck, and Christian Larroche, eds. *Biomass, Biofuels, Biochemicals: Biohydrogen*. Elsevier, 2019.
29. Rafieenia, Razieh., Maria Cristina Lavagnolo., and Alberto Pivato. "Pre-treatment technologies for dark fermentative hydrogen production: current advances and future directions." *Waste management*. Vol. 71, 2018, pp. 734-748.
30. Ferchichi., Mongi., Edward Crabbe, Gwang-Hoon Gil, William Hintz, and AmerAlmadidy. "Influence of initial pH on hydrogen production from cheese whey." *Journal of biotechnology*, Vol. 120, Issue. 4, 2005, pp. 402-409.
31. Ghimire, Anish, Luigi Frunzo, Francesco Pirozzi, Eric Trably, Renaud Escudie, Piet NL Lens, and Giovanni Esposito. "A review on dark fermentative biohydrogen production from organic biomass: process parameters and use of by-products." *Applied Energy*. Vol. 144, 2015, pp. 73-95.
32. Wu, Xiao., Wanying Yao., and Jun Zhu., "Effect of pH on continuous biohydrogen production from liquid swine manure with glucose supplement using an anaerobic sequencing batch reactor." *international journal of hydrogen energy*, Vol. 35, Issue. 13, 2010, pp. 6592-6599.
33. Chaganti., Subba Rao., BrahmaiahPendyala., Jerald A. Lalman., Sathyanarayanan S., Veeravalli, and Daniel D. Heath. "Influence of linoleic acid, pH and HRT on anaerobic microbial populations and metabolic shifts in ASBRs during dark hydrogen fermentation of lignocellulosic sugars." *International journal of hydrogen energy* 38, no. 5 (2013): 2212-2220.
34. Kumar, Gopalakrishnan, Guangyin Zhen, Takuro Kobayashi, PeriyasamySivagurunathan, Sang Hyoun Kim, and Kai Qin Xu. "Impact of pH control and heat pre-treatment of seed inoculum in dark H2 fermentation: a feasibility report using mixed microalgae biomass as feedstock." *International Journal of Hydrogen Energy*, Vol. 41, Issue. 7, 2016: 4382-4392.
35. Fang, Herbert HP, and Hong Liu. "Effect of pH on hydrogen production from glucose by a mixed culture." *Bioresource technology*, Vol. 82, Issue. 1, 2002, pp. 87-93.

## AUTHORS PROFILE



**C. ANANTHARAJ**, is a full time research scholar and also worked as a Project Fellow in a sponsored project under UGC-Major Research Project in the Department of Civil Engineering, Annamalai University. The author received his bachelor's degree from Pondicherry Engineering College and Master's Degree from Pondicherry University. His areas of interest are Wastewater Treatment, Solid Waste Management, and Waste to Energy.



**Dr.V. ARUTCHELVAN**, Professor in the Department of Civil Engineering, Annamalai University, Annamalainagar, Tamilnadu, India. He received his Doctor of Philosophy from Annamalai University. He guided around 6 Ph.D scholars completed, and presently the research scholars of about 5 candidates are under his supervisions. He published more than 50 National and International reputed Journals. His area of specialization is Bio-treatment of wastewater using bioreactors in aerobic and anaerobic process, Solid and Hazardous Waste management, Organic compounds characterization and treatability, Water reclamation and reuse, Water pre- and post- treatment.



**Dr.N. ASHOK KUMAR**, Associate Professor in the Department of Civil Engineering, Annamalai University. He received his Doctor of Philosophy from Annamalai University. He has published 19 research articles in reputed national and international journals, conferences. His areas of interest are Water resource Engineering, Solid Waste Management, wastewater treatment using aerobic and anaerobic bioreactors.