

# Impact of Point Angle on Drill Product Quality and Other Responses When Drilling EN- 8: A Case Study of Ranking Algorithm

S.P. Sundar Singh Sivam, Ganesh Babu Loganathan, K. Saravanan

**Abstract:** In the present work Drilling parameters has been advanced for EN-8 combination steel utilizing GRA (Grey Relational Examination). The parameters advanced are axle speed (SS - 3000, 3500 and 4000 rpm), feed rate (FR - 0.18, 0.20 and 0.22 mm/rev) and cemented Carbide twist drill of 14.5 mm width with Three flutes point angle (PA - 118,127 and 1350) And Lubrications Used Dry, Wet and Air on bases of surface harshness, Hole distance across, Thrust Force and Burr Size precision reactions. It is performed with the assistance of established carbide contort drills. On the bases of GRA alongside recognizable proof, huge commitment of parameters has been completed by utilizing ANOVA. Out of three factors considered point edge has huge impact on reactions as contrast with other parameters.

**Index Terms:** Drilling, Lubrications, Ranking Algorithm

## I. INTRODUCTION

With the worry of nature of Drilled items, quantities of the issues emerge, for example, opening surface unpleasantness (Ra), Hole Diameter Accuracy (HDA), burr Height (BH) and Tool wears (TW). SR and HDA have most impact on execution of a penetrated items. These vital attributes relies upon the penetrating parameters for a particular mix of material and bore instrument. A portion of the parameters have been advanced by various specialists for various materials and boring apparatus mixes. A trial and numerical investigation for cutting powers (CF), TW and SR has been finished by the creator. [1] For penetrating of composite A356/20/SiCp-T6. Specialist. [2 - 3] made utilization of Taguchi for streamlining SR and HDA in the dry penetrating of Al 2024 and Al 7075 separately. Hereditary calculation (GA) has likewise been utilized for improvement of multi-target penetrating by Author. [4], likewise Researcher [5] built up a fake neural system (ANN) show for fast penetrating by thinking about SS, FR and PA as parameters. Scientist. [6-7] upgraded penetrate parameters (FR, CS, PA) by utilizing Taguchi based GRA for SR and burr stature for composites. Scientific model has been produced by the analyst [8] and creator. [9-18] for penetrating procedure to gauge of CF and gap quality. Impact of covering on bored cast Al 356 amalgam has been examined by the creator. [10] For both dry and wet conditions. In this displayed work Taguchi

**Revised Manuscript Received on 8 February 2019.**

**S.P. Sundar Singh Sivam**, Assistant Professor, Department of Mechanical Engineering, SRM Institute of Science and Technology/ Kattankulathur – 603203, Tamil Nadu, India.


**Ganesh Babu Loganathan**, Assistant Professor, Department Mechatronics Engineering & Head of Department, Tishk international University, Erbil Kurdistan Region, Iraq

**K. Saravanan**, Assistant Professor, Department of Mechatronics Engineering, SRM Institute of Science and Technology/ Kattankulathur – 603203, Tamil Nadu, India.

based GRA has been connected for the advancement of boring parameters (L, PA, SS and F). The reactions consider for upgrading are Ra, HD, TF and BZ. The best parameter has been distinguished alongside the range and confirmative test has been led.

## II. EXPERIMENTAL TECHNIQUE

Experimentation has been conducted on the bases of Taguchi design for GRA. The correlation has been done between variables and responses. The material selected for study is EN-8 alloy and chemical composition is given in table 1. The Drilling tests are done on Brother CNC Machine, with FANUC OiMD-PB Controller. The material has been set up by cutting the plates of size 150×75×20 mm and confronting has been performed on CNC machine with face milling cutter to acquire level surface and lessen the thickness up to 20 mm. This plate is then mounted unbendingly on the table and gaps have been penetrated in the plate. The surface roughness (SR), Thrust Force (TF) and hole diameter accuracy (HAD) are reactions considered for study. Estimation of Ra has been taken in surface Roughness analyzer (Mitutoyo Surf test 4) and have been rehashed multiple times. The distances across of gaps made are estimated on co-ordinate estimating machine (CMM) having exactness of 0.1 μm. The Thrust Force Was Measured by Dynamometer. Burr Size was estimated by Microscope. The Theory of Optimization was dissected by [17].

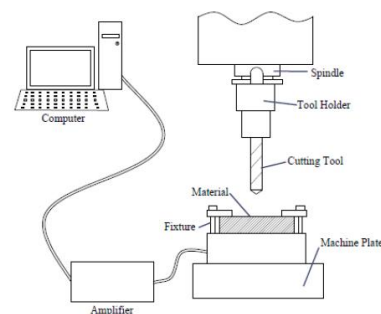

**Figure 1: Schematic Diagram**

### Plan of Investigation

Tests have been executed according to L9 OA by considering the dimensions of parameters given in Table 1. Table 2 demonstrates the outcomes acquired for the reactions.

**Table I: Factors and levels of independent variables**

Factors	Unit	Levels		
		1	2	3
Lubrications	-	Dry	Wet	Air
Spindle speed	Rpm	3000	3500	4000
Feed	mm/rev	0.18	0.2	0.22
Point angle	Degree	118	127	135

**Table II: Experimental results**

E	PA	L	SS	F	Ra	HD	TF	BZ
1	118	D	3000	0.18	0.650	23.9	2.9	54.6
2	118	W	3500	0.2	1.236	22.9	0.9	70.7
3	118	A	4000	0.22	1.104	18.0	1.4	26.8
4	127	D	3000	0.18	0.935	31.7	0.9	62.9
5	127	W	3500	0.2	1.187	22.9	0.9	35.1
6	127	A	4000	0.22	1.824	19.0	3.4	46.3
7	135	D	3000	0.18	0.872	34.1	0.4	32.6
8	135	W	3500	0.2	0.915	19.0	0.9	47.8
9	135	A	4000	0.22	0.872	31.7	1.4	97.1

**Table III: Parametric optimization of drilling process**

EX No	GRC				GRG	
	Ra	HD	TF N	BZ	GRADE	RANK
1	0.333	0.472	0.863	0.528	0.549	5
2	0.902	0.445	0.437	0.670	0.614	3
3	0.694	0.333	0.535	0.333	0.474	8
4	0.518	0.812	0.437	0.597	0.591	4
5	0.816	0.445	0.437	0.387	0.521	7
6	1.000	0.353	1.000	0.465	0.704	1
7	0.468	1.000	0.333	0.371	0.543	6
8	0.502	0.353	0.437	0.476	0.442	9
9	0.468	0.812	0.535	1	0.704	2

**Table IV: Response table for GRG**

Drill Constraints				Max-Min	Rank
Factor	A	B	C		
Lubrications	-15.93	-13.28	-15.44	2.65	3
Spindle speed (SS)	-15.08	-16.99	-12.58	4.41	2
Feed (F)	-15.35	-11.85	-17.45	5.597	4
Point angle (PA)	-13.92	-12.59	-18.14	5.554	1


Table IV, indicates contrast of most extreme and least dim social review for example 5.54 (point edge), 4.41 (Spindle speed), and 2.65 (Lubrications). It is seen that point edge is best and shaft speed, Lubrications feed tails it.

**Table V: Anova for Grey Grade**

SOV	SOS	DOF	MS	F	Ftable	%
Lubrications	0.005	2	0.0028	14.	4.2	8.38
Spindle speed	0.016	2	0.0080	39	4.2	23.7
Feed	0.023	2	0.0116	57	4.2	34.2
Point angle	0.0227	2	0.011	56	4.2	33
Error	0.002	9	0.002			
Total	0.067	17				

The anticipated estimation of GRG at the ideal dimension according to standard figuring [17] is acquired as 0.57. The 95% certainty interim forgot for present investigation. In last

affirmation test has been led by setting penetrating parameters and two preliminaries have been led. The qualities comparing to foresee and affirmation trial of surface unpleasantness, opening polar mistake and dim social review have been given in Table 5.

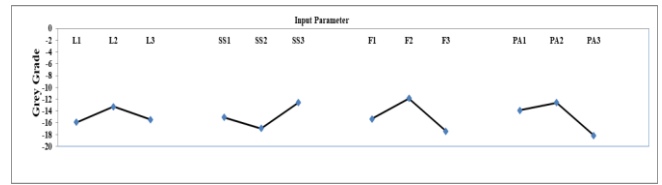

**Figure 2: Grey Grade Effects**

Figure 2, demonstrates that, Grey Grade Effects, Lubrication L2 of Wet Condition, Spindle Speed of 4000 Rpm, Feed of 0.2 mm/rev and Point Angle 1270 are most ideal conditions for acquiring Grade Value.

### III. CONCLUSION

Drilling analyses have been performed on a CNC vertical machining focus utilizing established cemented carbide twist drills on EN 8 compound steel as work material. L9 symmetrical exhibit was utilized for various mixes of Drilling trials. The surface Roughness and Hole diameter Error have been chosen as reactions for various mixes of Drilling parameters and rank of trail 6. Taguchi based GRA enhancement method has been utilized for multi reaction streamlining. The suggested dimension of parameters for better reactions are Lubrication L2 of Wet Condition, Spindle Speed of 4000 Rpm, Feed of 0.2 mm/rev and Point Angle 1270 are most ideal conditions for acquiring Grade Value. Out of three parameters considered, PA has most impact on reactions as contrast with other thought about Drilling parameters. Request of significance of factor is Feed, point edge, axle speed, Lubrications. Primary commitment rates for numerous execution qualities in Drilling EN8 steel alloy.

### REFERENCES

1. Davim Paulo J., Conceic C.A., & Antonio (2000). Optimal drilling of particulate metal matrix composites based on experimental and numerical procedures, International Journal of Machine Tools & Manufacture, Vol.41,pp. 21–31.
2. TosunNihat (2005). Determination of optimum parameters for multi-performance characteristics in drilling by using grey relational analysis, Int J Adv Manuf Technol, Vol.28, pp. 450–455.
3. S.P. Sundar Singh Sivam et al., “Orbital cold forming technology - combining high quality forming with cost effectiveness - A review”. Indian Journal of Science and Technology. Vol 9(38), October 2016, DOI: 10.17485/ijst/2016/v9i38/91426.
4. Sutherland, J. W., Kukur, V. N., King, N. C., 2000, An Experimental Investigation of Air Quality in Wet and Dry Turning, Annals of the CIRP, 49/1: 61-64.
5. S.P.Sundar Singh Sivam et al., “Frequently used Anisotropic Yield Criteria for Sheet Metal Applications: A Review”, Indian Journal of Science and Technology. Indian Journal of Science and Technology. Volume 9, Issue 47, December 2016. DOI: 10.17485/ijst/2015/v8i1/92107.



6. Daniel, C. M., Olson, W. W., Sutherland, J. W., 1997, Research Advances In Dry and Semi-dry Machining, SAE Technical Paper No. 970415 and SAE Transactions, Journal of Materials and Manufacturing, 106: 373-383.
7. S.P. Sundar Singh Sivam et al., "An Experimental Investigation And Optimisation Of Ecological Machining Parameters On Aluminium 6063 In Its Annealed And Unannealed Form, Journal Of Chemical And Pharmaceutical Sciences. Page No Page (46 – 53), 2015.
8. König, W., 1999, Fertigungsverfahren I – Drehen, Fräsen, Bohren, Springer-Verlag, Berlin Heidelberg.
9. S.P.Sundar Singh Sivam et al., "Frequently used Anisotropic Yield Criteria for Sheet Metal Applications: A Review", Indian Journal of Science and Technology. Indian Journal of Science and Technology. Volume 9, Issue 47, December 2016. DOI: 10.17485/ijst/2015/v8i1/92107.
10. P. Sundar Singh Sivam, et al., (2018). Comparison of Manufacturing Data Analysis For 5 & 3-Axis Vertical Machining Center for the Time and Tool Benefits of Industries. International Journal of Engineering & Technology, 7(4.5), 196-201. doi:http://dx.doi.org/10.14419/ijet.v7i4.5.20044.
11. P. Sundar Singh Sivam et al.. (2018). Development of Vibrator Feeding Mechanism Using Two Sets of Rollers for the Separation of Ball Grading For Industry Benefits. International Journal of Engineering & Technology, 7(4.5), 202-206. doi:http://dx.doi.org/10.14419/ijet.v7i4.5.20045
12. S.P. Sundar Singh Sivam et al., "Investigation exploration outcome of Heat Treatment on Corrosion Resistance of AA 5083 in Marine Application". International Journal of Chemical Sciences (ISSN 0972-768 X). Page No Page (15 – 22), 2015.
13. SIVAM, S. P. Sundar Singh et al."Multi Response Optimization of Setting Input Variables for Getting Better Product Quality in Machining of Magnesium AM60 by Grey Relation Analysis and ANOVA." Periodica Polytechnica Mechanical Engineering, [S.I.], 2017. ISSN 1587-379X. <https://doi.org/10.3311/PPme.11034>.
14. S.P. Sundar Singh Sivam et al., "Analysis of residual stresses, thermal stresses, cutting forces and other output responses of face milling operation on ze41 magnesium alloy." International Journal of Modern Manufacturing Technologies, Pp. No 92-100. ISSN 2067–3604, Vol. X, No. 1 / 2018.
15. Sivam, S. P. S. S., et al., "The Grey Relational Analysis and Anova to Determine the Optimum Process Parameters for Friction Stir Welding of Ti and Mg Alloys", Periodica Polytechnica Mechanical Engineering. doi: <https://doi.org/10.3311/PPme.12117>.
16. S. P. S. S. Sivam et al., "Competitive study of engineering change process management in manufacturing industry using product life cycle management — A case study," 2017 International Conference on Inventive Computing and Informatics (ICICI), Coimbatore, 2017, pp. 76-81. doi: 10.1109/ICICI.2017.8365247
17. S. P. Sundar Singh Sivam et al., (2019) A study of cooling time, copper reduction and effects of alloying elements on the microstructure and mechanical properties of SG iron casting during machining, Australian Journal of Mechanical Engineering, DOI: 10.1080/14484846.2018.1560679
18. S.P. Sundar Singh Sivam et al., (2018) "THICKNESS DISTRIBUTION AND NUMERICAL MODELLING OF CONVENTIONAL SUPERPLASTIC FORMING IN AA2024 ALLOY", International Journal of Modern Manufacturing Technologies, ISSN 2067–3604,76,85, Vol. X, No. 2 / 2018

Mechatronics Engineering. His research interests include Management, Power Electronics, Very Large-Scale Integrated Circuits, Surface Machining and Optimization. He is the author and Co Author of Many published papers on applications of Electronics, Integrated Circuits, Sheet Metal Formability, Machining Optimization & Manufacturing Management.

**K. Saravanan** received the M. Tech. Degree in Computer Aided Design from SRM University. Since 2012, he has been with SRM University as an Asst Professor at the Department Of Mechatronics Engineering. His research interests include Robotics Design, Manufacturing Management & Surface Machining and Optimization. He is the author and Co Author of Many published papers on applications of Robotics Design, Machining Optimization & Manufacturing Management.

## AUTHORS PROFILE

**S. P. Sundar Singh Sivam** received the M. Tech. Degree in Computer Integrated Manufacturing from Anna University. Since 2012, he has been with SRM University as an Asst Professor at the Department Of Mechanical Engineering. His research interests include Sheet Metal Forming, Manufacturing Management & Surface Machining and Optimization. He is the author and Co Author of Many published papers on applications of Sheet Metal Formability, Machining Optimization & Manufacturing Management.

**Ganesh Babu Loganathan** received the M. Tech. Degree in Power Electronics from Anna University. Since 2018, he has been with Tishk international University as an Asst Professor and Department Head at the Of

