

Hybridization Effect on Mechanical Properties and Erosion Wear of Epoxy-Glass Composites

Raffi Mohammed, B Ramgopal Reddy, Abdul Siddique Shaik, J.S. Suresh

Abstract: In this research work the mechanical and erosion wear behavior of E-Glass fiber reinforced epoxy based hybrid composites were determined. Fillers like coal fly ash (CFA), Coal powder (CP) and mixture of coal fly ash and coal powder (CFA-CP) at different weight proportions of 0wt%, 5wt% and 10wt% were mixed with Epoxy Resin and composites were fabricated by manual hand lay-up technique with 50wt% of Glass Fiber as reinforcement and the prepared composites were cut in to specimens as per ASTM standards for mechanical characterizations like tensile, flexural, ILSS, Impact and Hardness properties and erosion wear behavior. Experimental analysis shows that the tensile strength of unfilled Epoxy-Glass composites is maximum (252.189MPa) where as for 10wt% coal fly ash filled epoxy-glass composites tensile modulus is maximum (7.823 GPA). The flexural strength and ILSS are 750.54 MPa and 25.188 MPa respectively for 10 wt% CP filled hybrid composites. The impact strength and hardness are 2100 J/m and 62Hv for 10wt% CFA-CP filled epoxy composites. Coming to erosion wear behavior of composites filled with CFA-CP have exhibited maximum erosion wear resistance when compared with CFA filled epoxy composites. It is observed that with the increase in weight percentages of the filler material. The mechanical properties and erosion wear resistance of the composites were enhanced. Hence, for structural applications filler materials mixed Glass- Epoxy hybrid composites can be used in place of plain glass fiber reinforced epoxy composites due to the enhanced properties of composites.

Keywords: Glass fiber, Coal Fly ash (CFA), Coal Powder (CP), Mechanical Characterization, Erosion.

I. INTRODUCTION

In many of the advanced engineering applications polymer composites are emerging materials in place of metals based composites due to their ease of fabrication, economic viability, light weight, high strength, easy availability of good choice of materials from both thermoset and thermoplastic varieties[1-3]. The particles mixed with thermoset/thermoplastics as reinforcement along with E-Glass fibers are called as fillers. Filler inclusion in composite materials lowers the consumption of expensive binder material/matrix material and physical/mechanical properties will be improved [4]. Addition of filler to polymers

Revised Manuscript Received on July 10, 2019.

Raffi Mohammed, Research scholar, ANUCET Guntur & Associate Professor, MED, Ramachandra College of Engg., Eluru

Dr. B.Ramgopal Reddy, Associate Professor, Department of Mechanical Engineering of RVR & JC College of Engineering Chowdavaram, Andhra Pradesh.

Dr.Abdul Siddique Shaik Faculty of MED, King Khalid University, KSA

Dr. J.S. Suresh, Professor and HOD, MED, Ramachandra College of Engg., Eluru.

improves heat distortion temperature, mold shrinkage, stiffness, hardness and toughness and also reduces the fabrication cost [5]. Epoxy resins are used in coatings composites as matrix material, high performance applications, structural adhesives and other applications of engineering because of their excellent thermal and mechanical properties, high corrosion and chemical resistance, ability to be fabricated under a variety of conditions and low shrinkage on curing [6]. Composites prepared with glass fiber as reinforcement and various coal powders as fillers at 2.5 wt%, 5 wt%, 7.5 wt% with the increase in weight percentage of filler addition to the epoxy/polyester resins mechanical properties were improved [7]. Improvements in mechanical properties depends on interfacial bonding between fiber, filler with matrix material, filler size, shape and weight percentage [8]. In automobiles, mining, space ships, sports kits, structures manufacturing and equipment of marine polymer composites reinforced with fibers are used as fabricating materials due to their resistance to abrasion, corrosion, wear, erosion, high strength to low weight ratio and low cost of manufacturing. In present research work epoxy based hybrid composites are prepared by utilizing E-Glass fiber as reinforcement, coal fly ash/coal powder/ coal fly ash and coal powder and fillers. Here coal powder/coal fly ash is hazardous industrial wastes from powder plants which are causing severe environmental effects while disposing them in large scale. To overcome this situation these industrial wastes are being utilized in bricks manufacturing and composite manufacturing to enhance the strength [9-11].

II. MATERIALS AND METHODS

2.1 Materials required

- i. Epoxy Resin (LY556) + Hardener (HY951) as matrix material
- ii. E-Glass fiber as reinforcement
- iii. Coal powder and coal fly ash as fillers (or) Epoxy modifiers
- iv. Mould for composite fabrication
- v. Roller for uniform distribution of epoxy resin on E-Glass fiber and for removing entrapped air present in E-Glass fiber.
- vi. Silicone spray: Used for easy removal of composite from mould
- vii. Al₂O₃ erodent in air jet erosion test rig for erosion wear test

2.2 Methods

- i. Fabrication of composite is done by manual hand lay-up technique
- ii. Specimens are prepared as per ASTM standards by using conventional wire cutting machine.
- iii. Mechanical properties like tensile strength, flexural strength were determined by Instron UTM as per ASTM D-638-III and ASTM D-790 respectively. Impact strength was determined by Izod impact testing machine as per ASTM D-256 and Hardness of the specimen is determined by Vickers hardness tester as per ASTM E-384.
- iv. Development of a theoretical model for estimation of erosion wear rate.
- v. Estimation of erosion wear rate by Air jet Erosion test Rig.

vi. Comparative analysis of erosion wear rate

The removal of material from the surface of the specimen due to the impact of erodent (or) particles is called as erosion [9]. Erosion wear rate mainly depends on composition and type of materials to be used for fabrication of composite, type and size of erodent and experimental/operating conditions of Air jet erosion rig.

III. RESULTS AND DISCUSSION


3.1 Mechanical Characterization of Composites


The mechanical properties like tensile strength, tensile modulus, Flexural strength, impact strength and hardness are determined as per ASTM standards and the results are tabulated as shown in Table 3.1


Table 3.1 Composites Mechanical Properties						
Composite Designation	Tensile Strength (MPa)	ILSS (GPa)	Flexural Strength (MPa)	Hardness (Hv)	Impact Strength J/m	Tensile Modulus (GPa)
EGCFACP5	251.42	19.208	624.36	51	1974	5.936
EGCFACP10	242.56	21.612	702.48	62	2100	6.725
EGCFA5	234.47	9.696	525.42	41	1340	5.85
EGCFA10	175.133	24.247	693.07	48	1250	7.823
EGCP5	249	9.013	488.4	47	1850	5.225
EGCP10	181.786	25.188	750.54	51	1750	5.665
EG	252.189	20.507	666.58	32	687.5	6.292



S.No	Graphs for various Mechanical Properties	Reason for Decrease /Increase of value in Graph
1	<p align="center">Graph for Tensile Strength of various Composites Composite Type Vs Tensile Strength(MPa)</p>	<p>The declines in Tensile strength of composites are because of</p> <ul style="list-style-type: none"> ▪ Presence of pores at the interface between filler particles and the matrix. The interfacial adhesion may be too weak to transfer the tensile stress. ▪ In the matrix base stress concentration results due to the irregular shaped particulates.

Figure 1: Graph for Tensile Strength

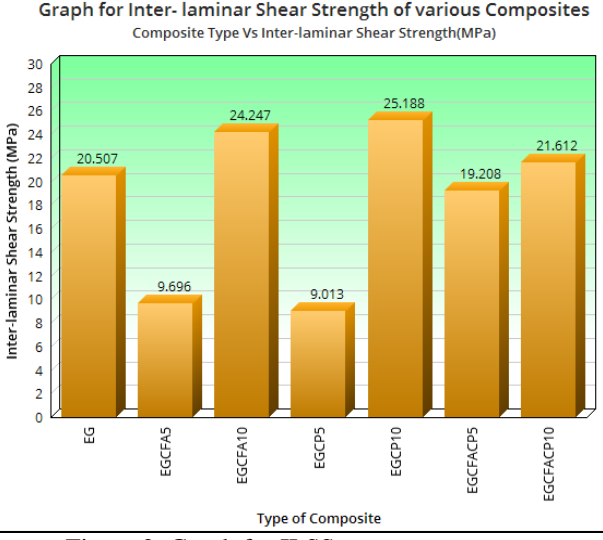2	 <p>Graph for Inter- laminar Shear Strength of various Composites Composite Type Vs Inter-laminar Shear Strength(MPa)</p>	<p>Composite EGCP10(40 Wt % Epoxy Resin + 50 Wt % Glass Fiber + 10 Wt %CP) Exhibited Maximum ILSS As Shown In Graph It May Be Due To</p> <ul style="list-style-type: none"> • Fine Particles Which Gives Better Adhesive Strength Compared To Other Fillers & Decrease In ILSS Might Be Due To The Poor Dispersion Of Micro Sized Particulates.
Figure 2: Graph for ILSS		

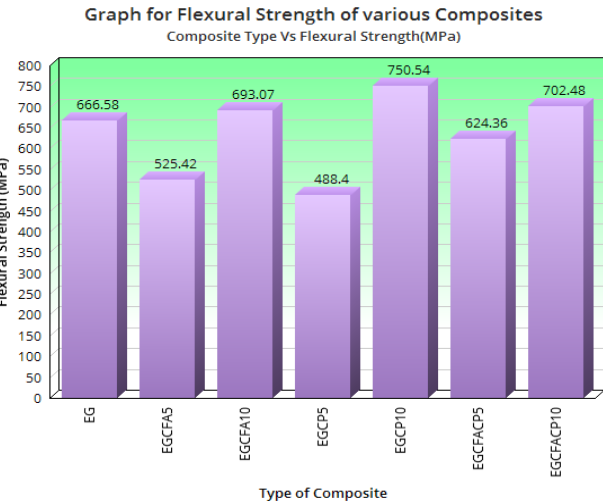3	 <p>Graph for Flexural Strength of various Composites Composite Type Vs Flexural Strength(MPa)</p>	<p>Composite EGCP10 (40 wt % Epoxy Resin+50 wt %Glass Fiber+10 wt %CP) Exhibited Maximum Flexural Strength as shown in Graph it may be due to</p> <ul style="list-style-type: none"> • Fine particles which give better adhesive strength compared to other fillers & decrease in F.S might be due to the poor dispersion of micro sized particulates.
Figure 3: Graph for Flexural Strength		

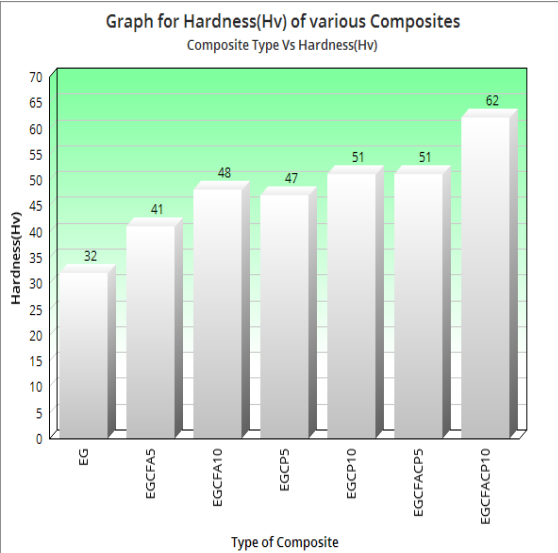4	 <p>Graph for Hardness(Hv) of various Composites Composite Type Vs Hardness(Hv)</p>	<p>Composite EGCFACP10 (40wt %Epoxy Resin + 50 wt % Glass Fiber + 10 wt % CFACP) Exhibited maximum Hardness of 62Hv and for remaining composites hardness is decreased. With the addition of filler hardness was increased.</p> <ul style="list-style-type: none"> • This is because during the compressive loading in hardness test the reinforcement phase (i.e. filler and glass fiber) and matrix phase are pressed together tightly in such a way that the interface can transfer pressure more effectively which results in enhancement of hardness.
Figure 4: Graph for Hardness		

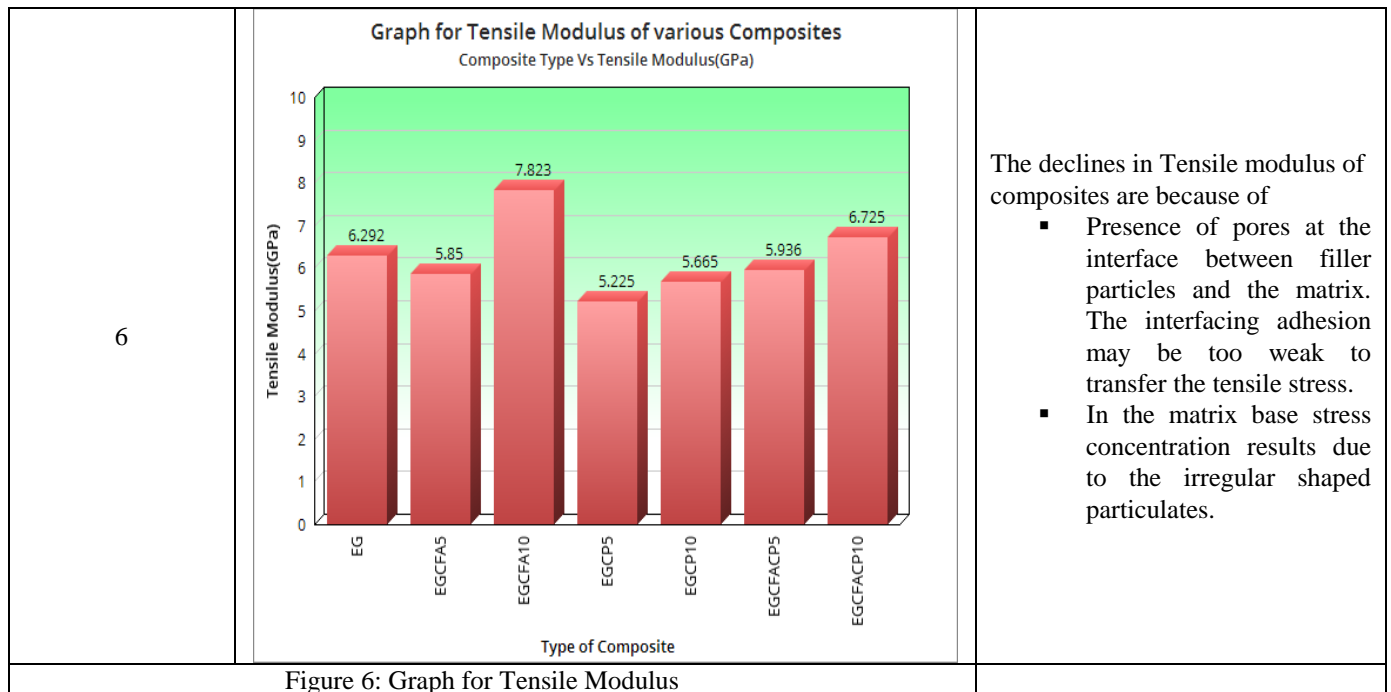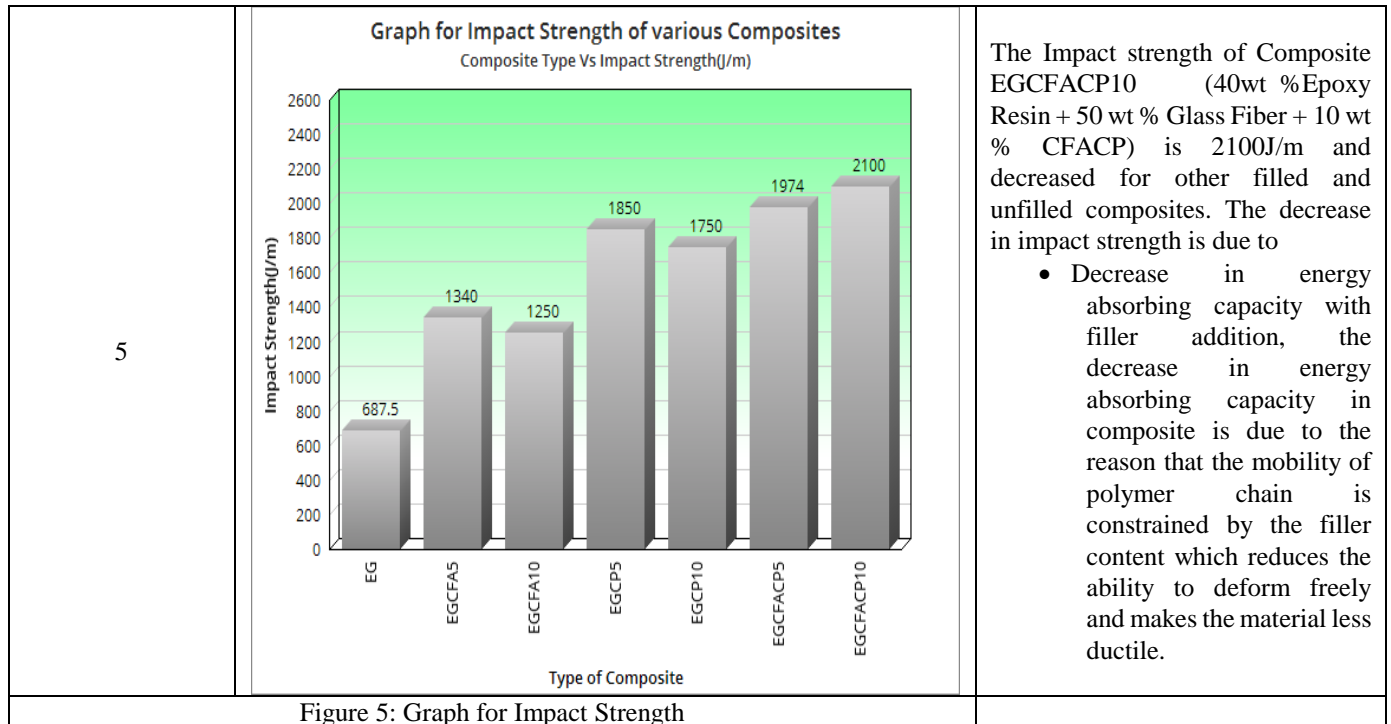

3.2 Erosion Wear Behavior of Hybrid Composites

The erosion wear behavior of epoxy based hybrid composites filled with CFA/CFACP is determined by Air Jet Erosion Test Rig under operating conditions like velocity of impact, standoff distance and impingement angle at weight percentages of 0, 5 and 10 of CFA/CFACP fillers from the Table 3.2 CFA filled epoxy based Hybrid composites exhibited a mean erosion wear rate of 1181.5 mg/kg having S/N Ratio of -61.0162 dB where as CFACP filled epoxy based hybrid composites exhibited mean erosion wear rate 591.353 mg/kg having S/N Ratio of -50.5165 dB. Theoretic erosion wear rate of these composites were found by the theoretical model developed. The theoretic mean erosion

wear rate of CFA filled composites is 1274.787 mg/kg where as for CFACP a filled hybrid composite is 620.811 mg/kg. The comparative erosive wear behaviors of epoxy based hybrid composites filled with CFA/CFACP are shown in Figures 7&8.

Table:3.2 Theoretical and Experimental Erosion Wear Behaviour of Hybrid Composites

Operating Variables				Erosion wear Rate(mg/Kg)			
Velocity of Impact (m/sec)	Wt% of filler	S.O.D (mm)	Impingement Angle (Degrees)	(CFA) _{Exp}	(CFA) _{thr}	(CFACP) _{Exp}	(CFACP) _{thr}
30	0	25	30	1305.63	1388.692	1305.63	1388.692
30	0	35	60	991.348	1054.416	991.348	1054.416
30	0	45	90	1328.217	1412.716	1328.217	1412.716
30	5	25	60	1219.87	1299.333	436.83	439.8489
30	5	35	90	732.27	779.9703	289.72	291.7222
30	5	45	30	589.79	628.2091	126.87	127.7468
30	10	25	90	833.87	933.9421	66.66	67.72703
30	10	35	30	958.64	1073.686	49.46	50.25171
30	10	45	60	1116.46	1250.446	72.43	73.58939
50	0	25	60	1530.11	1627.454	1530.11	1627.454
50	0	35	90	1678.58	1785.369	1678.58	1785.369
50	0	45	30	1128.89	1200.708	1128.89	1200.708
50	5	25	90	1496.04	1593.492	372.89	375.467
50	5	35	30	882.168	939.6327	314.68	316.8547
50	5	45	60	1381.2	1471.172	445.66	448.7399
50	10	25	30	639.09	715.7867	83.46	84.78543
50	10	35	60	839.48	940.2254	137.66	139.8462
50	10	45	90	829.119	928.621	74.92	76.10981
60	0	25	90	1664.95	1770.872	1664.95	1770.872
60	0	35	30	1309.83	1393.16	1309.83	1393.16
60	0	45	60	1010.9	1075.212	1010.9	1075.212
60	5	25	30	1855.87	1976.762	413.24	416.0959
60	5	35	60	2105.33	2242.472	473.82	477.0945
60	5	45	90	1343.75	1431.282	320.56	322.7754
60	10	25	60	1094.75	1226.13	153.26	155.7132
60	10	35	90	777.229	870.5037	96.24	97.78052
60	10	45	30	1258	1408.972	89.72	91.15615

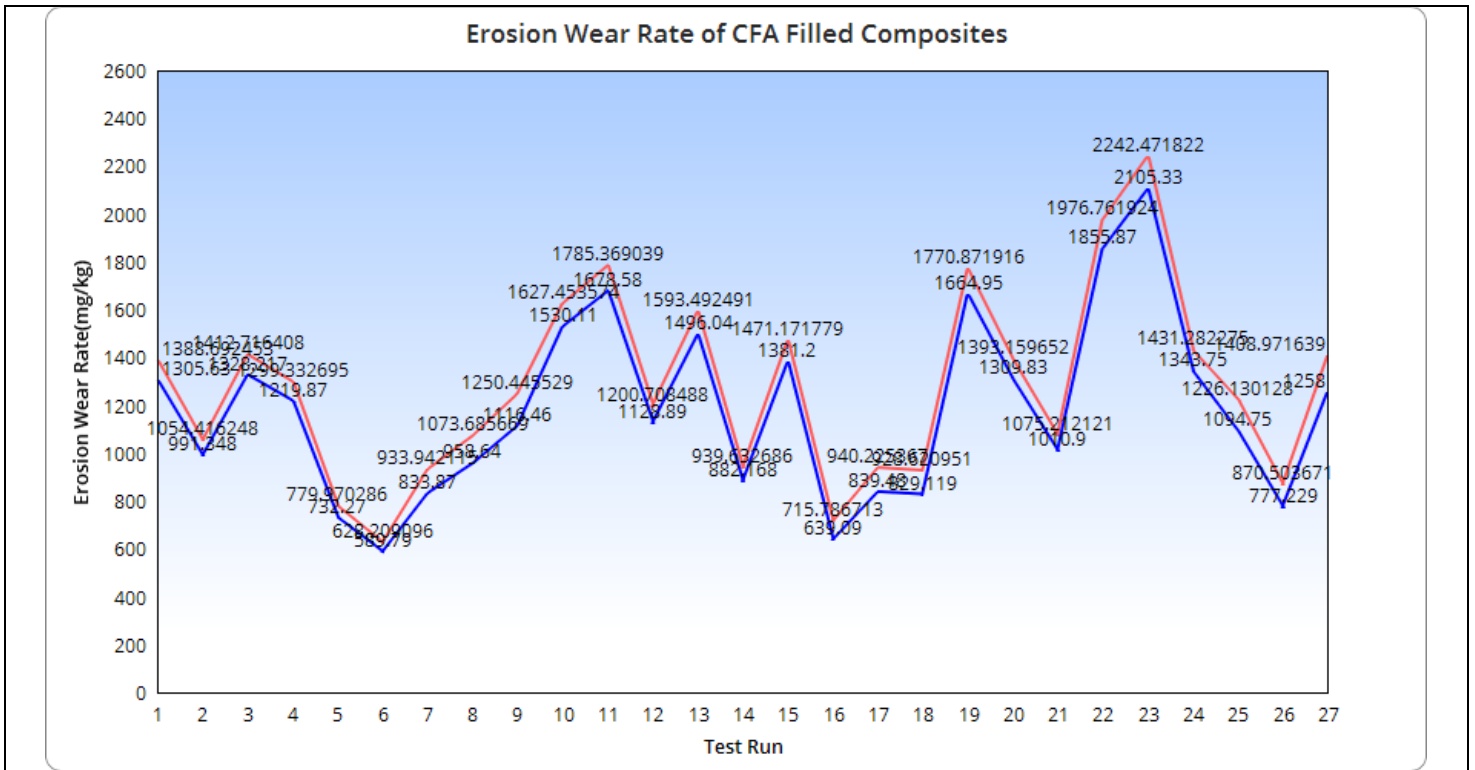


Fig.7 Comparative Graph for Theoretical & Experimental Erosion Wear Rate of CFA Filled Epoxy Based Hybrid Composites

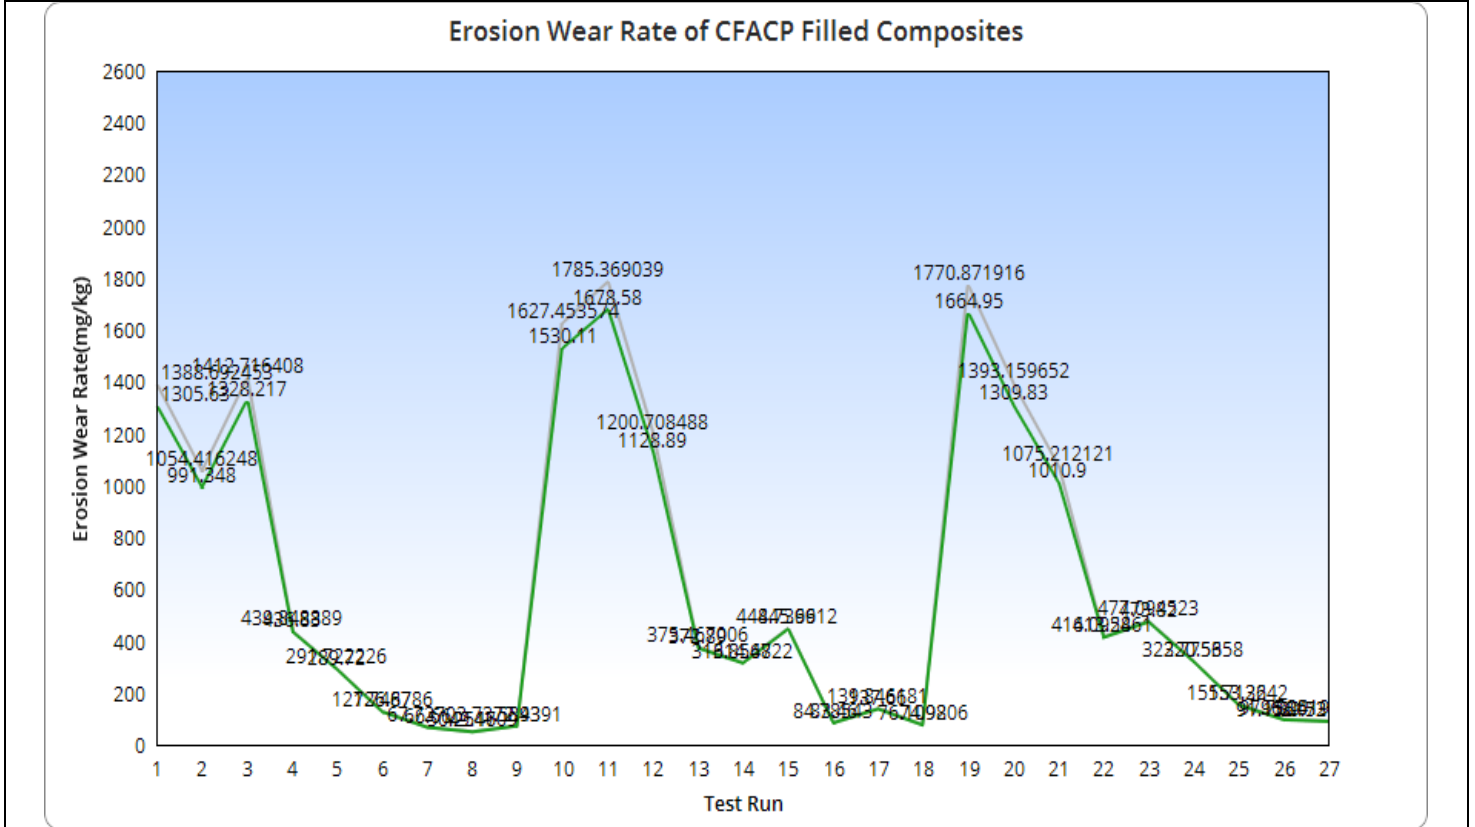


Fig.8 Comparative Graph for Theoretical & Experimental Erosion Wear Rate of CFACP Filled Epoxy Based Hybrid Composites

IV. CONCLUSIONS

- (1) Fabrication of CFA/CFACP filled Hybrid composites has been done by manual Hand lay-up process.
- (2) Mechanical characterization of composites has been done and reasons for increase/decrease in mechanical properties were discussed.
- (3) Theoretical and experimental results of erosion were compared and the % error for CFA filled composites is 7.317% and for CFACP filled composites is 4.745%
- (4) The erosion wear resistance is more for CFACP filled composites when compared with CFA filled composites.

REFERENCES

1. Mohammed, Raffi, et al. "Mechanical Characterization & TOPSIS Ranking of Glass Fiber Reinforced Particulate Filled Epoxy based Hybrid Composites." Journal of Chemical and Pharmaceutical Sciences, Special 2 (2017): 311-317.
2. Mohammed, Raffi, et al. "Effect of epoxy modifiers [Bagasse fiber/Bagasse ash/Coal powder/Coal Fly ash] on mechanical properties of epoxy/glass fiber hybrid composites." Int. J. Appl. Eng. Res 10 (2015): 45625-45630.
3. Bheemappa Suresh, Manpinder Singh Saini. "Fabrication and mechanical characterization of carbon fabric reinforced epoxy with alumina and molybdenum disulfide fillers, International Journal of Computer Aided Engineering and Technology, Vol.10, No.1/2, 2018, pp.89-101.
4. Siva Sankari, Murugan. N, Sivaraj. S. "Effect of filler materials on the mechanical and thermal properties of Epoxy resin" Applied mechanics and materials, Vols. 592-594(2014), pp.206-210.
5. K. Devendra, T. Rangaswamy. "Strength characterization of E-Glass fiber reinforced epoxy composites with filler materials" Journal of minerals and materials characterization and engineering, 2013, 1, 353-357.
6. N. Hammed, P.A. Sreekumar, B. Francis, W. Yang and S. Thonas. "Morphology, Dynamic mechanical and thermal studies on poly(styrene-co-acrylonitrile) modified Epoxy Resin/Glass fiber composites" Composites Part A, Vol.38, No.12, 2007, pp 2422-2432.
7. Suresh J.S, M. Pramila Devi and Raffi Mohammed. "Investigation on mechanical properties of Epoxy/polyester based composites, IJASET, Vol.5 issue 1, 2017.
8. Raffi Mohammed, B. Ramgopal Reddy et.al. "Fabrication, Mechanical characterization and selection of Hybrid composites by TOPSIS" International Journal of Recent Technology and Engineering, Vol.8, issue 1, May 2019, pp.3118-3125.
9. Raffi Mohammed, B. Ramgopal Reddy et al. "Fabrication and erosion wear Response of E-Glass Epoxy based Hybrid composites filled with CFA/CFACP" International Journal of Engineering and Advanced Technology, Vol.8, issue 3, Feb 2019, pp-522-528.
10. Raffi Mohammed, B. Ramgopal Reddy et al. "Synthetic Fibers of polymer matrix composites-A Review" Journal of Advanced Research in Dynamical and Control Systems, Vol.10, 09-Special issue-2018, pp-2733-2743.
11. Friedrich K, "Erosive wear of Polymer surfaces by steel blasting" J. of Mater. Sci, 1986, 21:3317-3332.

AUTHORS PROFILE



Raffi Mohammed is a Research scholar at ANUCET Guntur and he is currently working As Associate Professor in the Department of Mechanical Engineering of Ramachandra College of Engineering, Eluru. He is having a total experience of 10 Years to teach UG/PG courses in Mechanical Engineering. He has published many papers in national and

international Journals and member of various professional Bodies.



Dr. B Ramgopal Reddy is currently working as Assoc. Professor in the Department of Mechanical Engineering of RVR&JC College of Engineering, Chowdavaram, Guntur. He is having a total experience of 20 years to teach UG/PG courses in Mechanical Engineering. He has published many papers in national and international journals and member of various professional bodies.



Dr. Abdul Siddique Shaik is currently working as a faculty of Mechanical Engineering in King Khalid University, KSA. He is having a total experience of 18 Years to teach UG/PG courses in Mechanical Engineering.



Dr. J.S. Suresh is currently working as Professor & HoD in the Department of Mechanical Engineering of Ramachandra College of Engineering, Eluru. He is having a total experience of 10 years to teach UG/PG courses in Mechanical Engineering. He has published many papers in national and international Journals.