

Emission Reduction in SI Engines by using metal doped Cu- ZSM5 and Ce.Cu- ZSM5 zeolite as Catalysts

Rajakrishnamoorthy.P , Elavarasan G , Karthikeyan.D, Saravanan.C.G

Abstract: In recent investigations, it has been found that ZSM5 like catalysts were preferred nor the NOx reduction in the lean burn operating engines. The present experiment is focused on the spark ignition engine emission reduction using metal doped Cu-ZSM5 and Ce.Cu-ZSM zeolite based catalyst. Copper and cerium site was found very much active for the fast reduction of Nitrogen Oxides (NOx), hydrocarbon (HC) and carbon monoxide (CO) emissions. The engine used for the testing is a twin-cylinder petrol fuelled engine coupled with an eddy current dynamometer. The emissions from the engine were measured by AVL DI-gas analyzer. Initially, the emission reading was measured from the commercial catalytic converter that was fitted near to the exhaust and then the emissions were measured from using the Cu-ZSM5 and Ce.Cu-ZSM5 zeolite based catalytic converters. The results indicate that the zeolite based catalysts reduces the exhaust emission more than that of the commercial catalytic convertor.

Index Terms: SI engine , Emission reduction, Catalysts , Zeolite

I. INTRODUCTION

The Environmental protection Organization of various countries has made strict rules in the field of Automobile to reduce the toxic emissions from the Internal Combustion Engines. Each country having different testing methods for determining the automobile exhaust emission and different emission standards were implemented according to their convenience. The major Spark Ignition(SI) Engine emissions were Hydrocarbons(HC), Carbon Monoxide (CO) and Nitrogen Oxides (NOx) , In Compression Ignition(CI) Engine the emissions were HC, CO, NOx and particulate matter in addition(1). Because the air fuel mixture in CI engine is heterogeneous in nature the atomization of the fuel may not be proper in some conditions which leads to particulate emissions, mostly particulate emissions will be abundant during the starting of the engine & hard acceleration as the engine is operating in rich air fuel mixture in these conditions. There are many technologies that were already in use in the field of emission control, In this paper we have examined one of the post treatment techniques for the reduction of NOx emission in the exhaust pipe. A catalyst is a substance that will enhance the chemical reaction, the existing emission control

Revised Manuscript Received on July 05, 2019.

Rajakrishnamoorthy.P , Mechanical Engineering, Annamalai University, Chidambaram, India.

Elavarasan G , Mechanical Engineering, Annamalai University , Chidambaram, India.

Karthikeyan .D, Mechanical Engineering, Annamalai University, Chidambaram, India.

Saravanan.C.G , Mechanical Engineering, Annamalai University, Chidambaram, India.

technologies like three way Catalytic Convertor which is used for controlling Hydrocarbon(HC), Carbon Monoxide (CO), Nitrogen Oxides (NOx) with the help of Platinum, Palladium & Rhodium as a catalyst and Selective Catalytic reduction for the reduction of NOx with a catalyst and ammonia or urea as a reducing agent were used for controlling engine exhaust emissions. In recent development of automobiles, most of the Automobile petrol engine combustion was taking place near to the stoichiometric or lean air fuel mixture ratio commonly known as lean burn engine. But the existing emission control technologies have higher efficiency when the engine is operating at stoichiometric (14.68:1) or rich air-fuel ratio, it shows very less conversion efficiency of toxic exhaust emissions to non-toxic while the engine is working in lean air fuel mixture ratio. If the engine is operating in the lean mixture then the availability of oxygen content in the exhaust is more that tends to support the oxidation process of HC and CO to H2O and CO2 not helping in the reduction process of NOx to nitrogen gas. Here comes the need to develop a catalyst that could able to enhance the reduction process of NOx even the engine is working in a lean air fuel ratio. Zeolites which can be used as a catalyst for the reduction process of NOx, some zeolites may be occurred naturally but they cannot be used as a catalyst as they were mostly unstable, On the other hand the artificially synthesized zeolites place themselves in a special positions in various field as a catalyst as well as a adsorbent of various metals in the micro structure level. BB Ghosh et al, have involved in the testing of a ultra-stable synthetic siliceous crystalline Zeolite ZSM-5 supported by Cu-Pt and Cu-Rh bimetallic catalysts was tested against a lean burn SI engine for its ability to reduce HC, CO & NOx emissions and they have got the better result compared to the conventional three way catalytic convertor(1). BB Ghosh et al, have also involved in the testing of Cu-ZSM5 based catalyst which contains 4% of Cu-4% with ZSM-5 with Copper & Platinum of 4% of Cu-4 & less than 0.1% of Pt as catalyst for the reduction of HC, CO & NOx emission and the results were found to be that the later one was having better efficiency than the previous one(2). J.Ochonska et al, have worked in the area of preparation and coating of Cu exchanged zsm-5 in the monolithic structure for the reduction of NOx they have found that in situ method on non calcined plates have six times more deposition than that of the dip coating method and in situ method on calcined plates have two times more composition than that of the dip coating method (3). SukjinChoung et al, have investigated the NOx emission reduction of emission in a lean burn engine using Pt,Cu and Mg-Cu Ion exchanged zsm-5



and they have found out that the Mg-Cu-Ion exchanged zsm-5, a bimetallic based zsm-5 shows the maximum efficiency than the other types of zeolites(4). Ismail MohdSaaid et al, have come to a conclusion that the presence of excess amount of oxygen in the exhaust will enhance the NOx reduction using a bimetallic catalyst Pt-Cu-ZSM-5 than in mono metallic catalyst cu-ZSM-5 or Pt-ZSM-5(5). CeO2-Zro2-Al2O3-La2O3 based catalyst was tested against the Natural Gas Operated Vehicle working in a stoichiometric air fuel ratio for the reduction of CH4,NOx and CO and it has been found that the catalyst have high thermal conductivity as well as better reduction of NOx than CH4 and CO(6). It has been found that the 30% ceria content in the catalyst have more efficiency of conversion of HC,CO and NOx, Also ceria content in the catalyst will increase the durability of the catalyst operation(7). The use of Fe-impregnated catalyst in the presence of ammonia shows high catalytic activity compared to other type of catalyst and also it shows higher resistance to Sulphur Dioxide attack in the exhaust gas(8). The 23.6 weight % of Copper-Zinc/ZSM-5 based catalyst that was wash coated in a 400cpsl monolithic for the Selective Catalytic Reduction of Nitrogen oxides emissions in a diesel exhaust shows a high stability and reactivity of the catalyst is a maximum of 88% at 400 deg Celsius temperature(9). Because of the high silica to alumina ratio in the zeolite zsm-5 and with the help of bimetallic catalyst for the NOx reduction in a lean burn engine,we have used this zeolite based ZSM-5 catalyst doped with Cerium-Iron bimetallic catalyst and also with Copper-Iron bimetallic catalyst in addition with the oxidation enhancing catalyst and the results are showing that this type catalytic convertor has the maximum conversion efficiency compared to the existing emission control technologies. The present investigation is focused on SI Engine emissions reduction using Cu-ZSM5 and Ce.Cu-ZSM5 catalysts.

II. METHODS & MATERIALS

2.1 Materials

Commercially used zsm-5 zeolite was purchased from SRL Pvt. Ltd., Mumbai, India. The cordierite monoliths having cell density of 400 CPSI and wall thickness of 0.17 mm with dimensions of 90mm x 90mm diameter and length was purchased from Bocent Advanced Ceramics Co Ltd, China was used to prepare the catalyst.

2.2 Catalyst Preparation method

The ZSM-5 zeolite was impregnated by transition metals like copper and cerium. The weight ratio was 97% zsm zeolite and 1.5% copper and 1.5% cerium. This was made to form a slurry like substance and the same was dried and fired. Thus the hardened surface was formed and this hardened surface was crushed into fine powder and mixed with wet organic and inorganic blends. The resulting paste was washcoated into the honeycomb monoliths.

2.3 Catalyst Characterization

The analysis of XRF, SEM and XRD was carried out on zsm5 zeolite and metal doped zeolites and the results were shown in table 1. From the results it is observed that the weight percentage were decreased in the metal doped zeolite.

Table 1 Chemical composition of zsm5- zeolite and Metal doped zeolites

[Determined by XRF (Mass %)]

Composition	ZSM5	Cu-ZSM5	Ce.Cu-ZSM5
-------------	------	---------	------------

SiO2	88.372	87.012	87.092
Al2O3	3.256	3.091	3.150
Fe2O3	0.114	0.110	5.982
CaO	0.014	0.014	0.011
MgO	1.150	1.050	1.110
SO3	0.134	0.126	0.123
Na2O	7.001	1.515	1.095
K2O	0.00	0.00	0.00
CuO	0.00	5.012	0.00
P2O5	0.00	0.00	0.00
TiO2	0.025	0.22	0.21
BaO	0.00	0.00	0.00
LOi	0.00	0.00	0.00

The SEM analysis (Fig.1&2) shows that the surface of the catalyst microstructure was modified. The particle size of the metal doped catalyst surface was small compared to that of the original one.



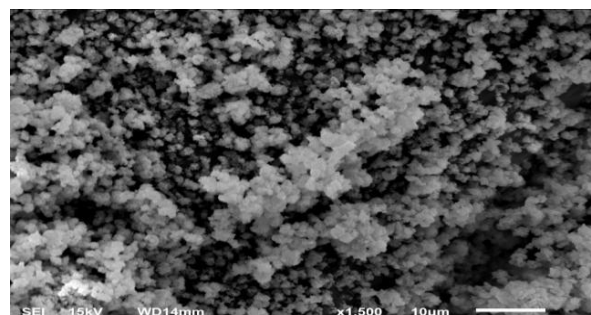


Fig.1 SEM image of zsm5-Zeolite

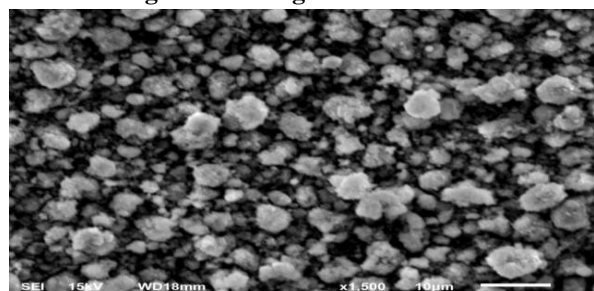

(a)Cu-ZSM5 zeolite

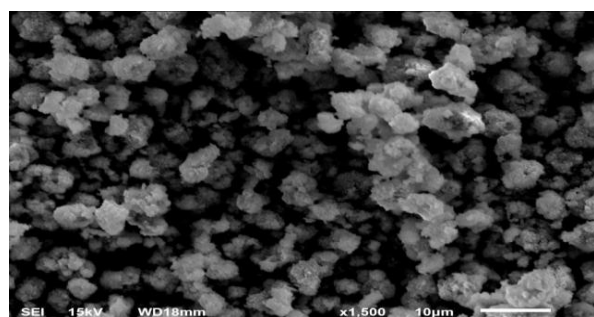

(b) Ce.Cu-ZSM5 zeolite

Fig.2 SEM image of metal doped Zeolites

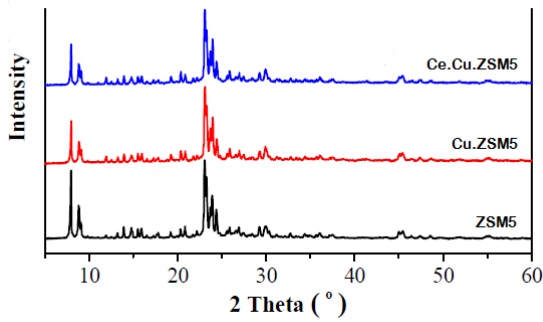


Fig.3 XRD Patterns of ZSM5 zeolites and metal doped Zeolites

2.4 Catalytic Converter

The Cu-ZSM5 and Ce.Cu-ZSM5 zeolite catalysts coated monoliths are housed individually in a steel covering with inlet and outlet cones. The catalytic converters are fabricated as same as commercial catalytic converter. Fig. 4 shows photographic view of all the three catalytic converter.



Fig.4 Photographic view of all the three catalytic converter.

III. EXPERIMENTAL SET-UP

- 1.Nano Engine
- 2.Eddy current dynamometer
- 3.Spark Plug
- 4.Weighing Balance
- 5.Fuel tank
- 6.Fuel pump
- 7.Air filter
- 8.AVL Di-gas analyser
- 9.Pressure transducer
- 10.Crank angle encoder
- 11.Charge amplifier
- 12.Indimeter
- 13.Monitor
- 14.Catalytic converter

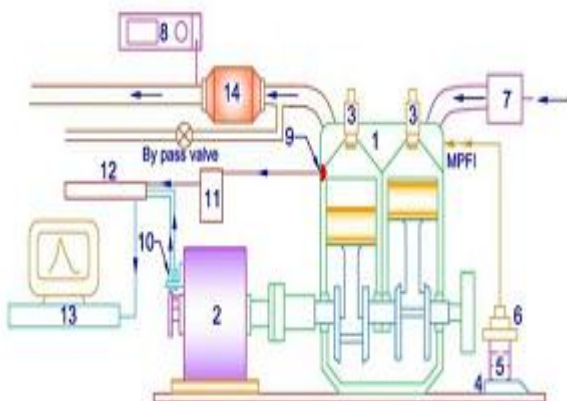


Fig.5 Experimental Block diagram

Table 2 Engine specification

Engine	Nano Engine
Type	Twin Cylinder, 624 cc, MPFI
Bore diameter	73.5 mm
Stroke	73.5 mm
Maximum power	37bhp @5000 rpm
Maximum torque	51 Nm @ 3000 rpm
Dynamometer constant	9549.5
Compression ratio	9.5:1

The experiment were carried out in the SI engine exhaust of a above mentioned specification in table.2 and the block diagram of the experimental setup were shown in the figure.5. The emission from the SI engine were measured using the AVL-Di gas analyzer. The exhaust temperatures as measured by using a Chromel-Alumel thermocouple that was fixed at 3 different places of the catalytic converter. Engine was allowed to run in different loads (4,7,10,13 and 16kW) without catalytic converter and the various exhaust emissions were measured. Then the emissions were measured after fixing the commercial catalytic converter and then the same was replaced by the Cu-zsm5 zeolite and Ce.Cu zsm5 zeolite catalytic converters and the exhaust emissions were measured.

IV. RESULTS AND DISCUSSIONS

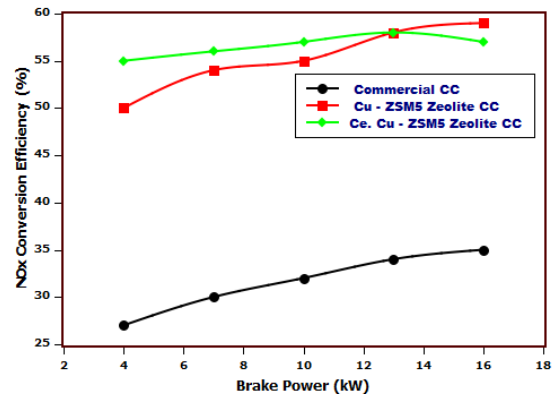


Fig.6 Percentage reduction of NOx Vs load

Figure.6 shows the comparison of Ce.Cu zsm5, Cu, zsm5 and the commercial catalytic converter on their efficiencies to reduce the nitrogen oxide emissions It is clear from the figure that the Ce.Cu -zsm5 type catalytic converter shows the maximum reduction of NOx conversion compared to other type of catalytic converter. For 13 kW brake power the efficiency is maximum of about 58%.



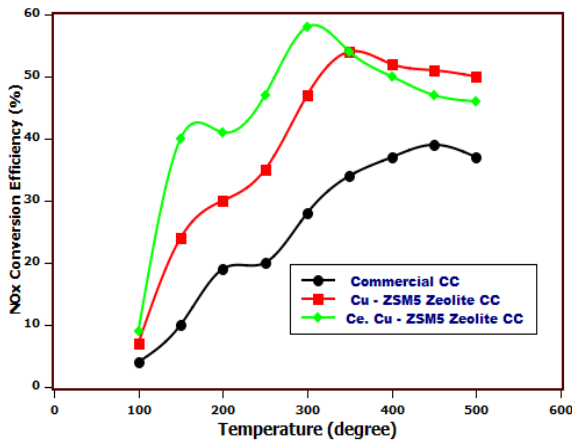


Fig.7 NOx Emission against temperature

Figure 7 shows that the NOx efficiency of the Copper-zsm5 zeolite and the bimetallic catalyst shows the higher conversion efficiency than that of the commercial catalytic convertor. Also the bimetallic catalyst was more effective than the single metal doped zeolite. The conversion efficiency is better even in the lower as well as higher temperatures and the maximum range for the better results were obtained for the exhaust temperatures ranges about 300 to 450 deg celcius.

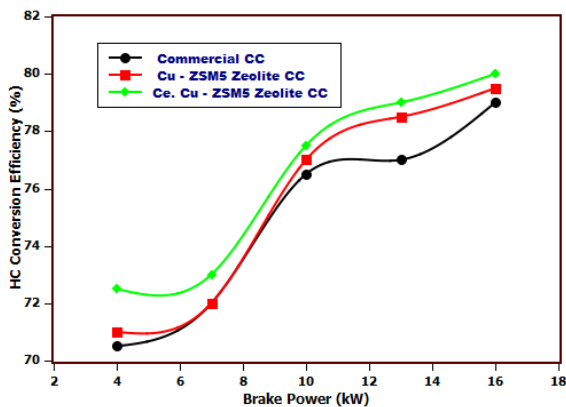


Fig. 8 Hydrocarbon against Brake Power

From the figure 8 it is clear that the HC emission conversion were higher for the bimetallic catalyst and also that the for the increase in the brake power the working of this catalyst is very impressive than the commercial zsm5 catalyst as well as the mono metal doped catalyst.

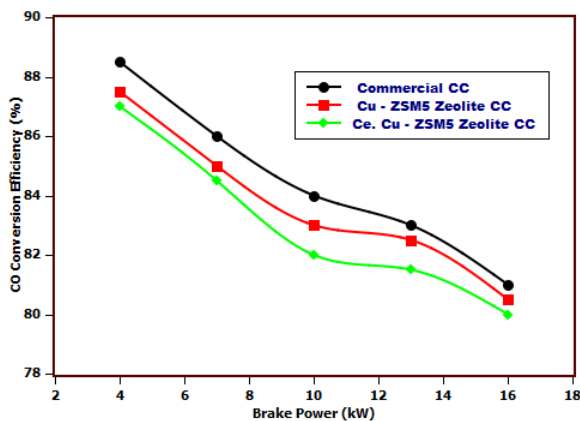


Fig.9 Carbon Monoxide against Brake Power

The CO conversion efficiency against different brake power was shown in the figure 9 and from the graph it is clear that the CO conversion is more in the commercial zsm5 without any metal doped zeolite. The reason is that the oxidation process is required for the CO conversion but the metal doped zeolite will enhance reduction process.

V. CONCLUSION

Thus the zsm5 zeolite was commercially purchased and it was coated in the monolithic structure in two different forms and it was tested to check its emission reducing efficiency. This single and bimetallic catalyst was compared with the commercial catalytic convertor. The results shows that the bimetallic Ce.Cu-zsm5 zeolite coated catalytic convertor and the mono metal doped Copper-zsm5 coated catalytic convertor shows the maximum conversion efficiency for the reduction process of NOx and HC emission but less for the oxidation of CO emissions.

ACKNOWLEDGEMENTS

The Authors would like to acknowledge to the head of the department, Mechanical Engineering, Annamalai University for his continuous support to carry this experiment successfully in our department lab. We also extend our gratitude to all the non-teaching faculty members of the mechanical engineering department for their cooperation and physical support to perform the experiment successfully. We also like to thank our friends and technicians family members.

REFERENCES

1. Bankim B. Ghosh, Prokash Chandra Roy, Mita Ghosh, Paritosh Bhattacharya, Rajsekhar Panua, Prasanta K. Santra, 2005, "CONTROL OF S.I. ENGINE EXHAUST EMISSIONS USING NON-PRECIOUS CATALYST (ZSM-5) SUPPORTED BIMETALS AND NOBLE METALS AS CATALYST" Proceedings of ICES2005 ASME Internal Combustion Engine Division 2005 Spring Technical Conference
2. BB. Ghosh, PC Roy, PPGhosh, MN Gupta, P K. Santra, 2002, "Control of SI Engine Exhaust Emission Using ZSM-5 Supported Cu-Pt Bimetals as a Catalyst" SAE Technical papers, 2002-01-2147
3. J. Ochońska, A. Rogulska, P. J. Jodłowski, M. Iwaniszyn, M. Michalik, W. Łasocha, A. Kołodziej, J. Łojewska, 2013, "Prospective Catalytic Structured Converters for NH3-SCR of NOx from Biogas Stationary Engines: In Situ Template-Free Synthesis of ZSM-5 Cu Exchanged Catalysts on Steel Carriers", Topics in catalysis, TopCatal (2013) 56:56-61.
4. Sukjin Choung, Byeongseon Shin, Jaeho Bae, 1997, "Purification of NOx on Pt-ZSM-5 catalysts under lean burn engine emission conditions" studies in surface science and catalysis, Vol 105, 1601-1608.
5. Ismail Mohd Saaid, Abdul Rahman Mohamed, Shubhash Bhatia, 2002, "Activity and characterization of bimetallic ZSM-5 for the selective catalytic reduction of NOx", journal of molecular catalysis A: Chemical, Volume 189, Issue 2, Pages 241-250.
6. Xiaoyu Zhan, Enyan Long, Yile Li, Jiayun Guo, Lijuan Zhang, Maochu Gong, Minghua Wang, Yaoqiang Chen, 2009, "CeO2-ZrO2-La2O3-Al2O3 composite oxide and its supported palladium catalyst for the treatment of exhaust of natural gas engine vehicles", journal of natural gas chemistry, Volume 18, Issue 2, Pages 139-144
7. Galen B Fisher, Joseph R Theis, Mark V Casarella, Stephen T Mahan, 1993, "The Role of Ceria in Automotive Exhaust Catalysis and OBD-II Catalyst Monitoring" SAE MOBILUS, 931034.
8. Chengyang Yin, Peifucheng, Xiang Li, Ralph T Yang, 2016, "Selective catalytic reduction of nitric oxide with ammonia over high-activity Fe/SSZ-13 and Fe/one-pot-synthesized Cu-SSZ-13 catalysts", Catalysis Science & Technology, issue 20, 6, 7561-7568



9. AhamdZuhairi Abdullah, Hamidah Abdullah and Shubash Bhatia, 2001, "Selective Catalytic Reduction of Nitric Oxide in Diesel Engine Exhaust over Monolithic Catalysts Washcoated with Bimetallic Cu-Zn/ZSM-5", Thai society of higher education Institutes on environment, 10-16.
10. Iwamoto, M., "Future opportunities in catalytic and separation technology" Elsevier, Amstardam (1990)
11. Ghosh, B.B., Santra, P. K., Ghosh, P. P., Banerjee, T., Ghosh, A., and Ramanujam, S., "catalytic reduction of SI engine emissions using Cu-ion exchange ZSM-5" SAE paper no 2001-01-0013, p 227-231, 2001.
12. Ghosh, B.B., Ramanujam, S., Ghosh, P. P., Roy, P. C., Mondal, S. S., and Santra, P. K., "Control of NOx and CO in SI engine exhaust emissions using Cu-ion exchange ZSM-5 with impregnation of platinum and palladium" SAE paper no 2001-28-0042
13. Cho, B.K., "Nitric oxide reduction by hydrocarbons over Cu-ZSM-5 monolith catalyst under lean conditions: steady state kinetics." Journal of catalyst, 142(1993) ,p 418-427.
14. Lu, H., Pradier, C.m and Flodstron, A.S. "Catalytic reduction of nitric oxide over copper Part II, influence of sulphur dioxide." J. Mol. Catal. A. 112(1996) p 459-467.
15. Sinfelt, J. H., "Bimetallic catalyst- discoveries concepts and applications" (John Willey & Sons, New York) 1993, p 131.
16. Pratyush Nag, B. B Ghosh, Randip K. Das and Maya Dutta Gupta, 'x NO Reduction in S I Engine Exhaust Using Selective Catalytic Reduction Technique', SAE paper no. 980935, pp.153-156, 1998.
17. B. B. Ghosh and Randip K. Das, 'Catalytic Reduction of S.I.Engine Emissions Using Ion- Exchanged X-Exchanged X-Zeolites' SAE paper no. 990015, pp. 201-206, 1999.
18. Jan Kaspar, Paolo Fornasiero, Neal Hickey – Automotive Catalytic Convertors; Current status and some perspectives, catalysis today 77 (2003) 419-449.
19. Randip K. Das, Souvik Bhattacharyya, M. Dutta Gupta, B.B. Ghosh – Theoretical and experimental analysis of iron-exchanged X-zeolite catalyst for SI engine emission control- Experimental Thermal and Fluid Science 19(1999) 214-222.
20. Pratyush nag, B.B.Ghosh, Randip K.Das and Maya Dutta Gupta- NOx Reduction in SI Engine Exhaust Using Selective Catalytic Reduction technique- SAE Paper980935.
21. Randip K. Das, Souvik Bhattacharyya, B.B. Ghosh and Maya Dutta Gupta- "Development and Performances Studies for SI Engine Emission Control"- SAE Paper 971652, 1997.
22. Souvik Bhattacharyya, Randip K. Das – Catalytic reduction of NOx in gasoline engine exhaust over copper and nickel-exchanged X-zeolite catalysts – Energy Conversion and Management 42(2001) 2019-2027.
23. Swati Bhimasenrao Wadawadagi and Venkataramana Reddy.C., - "Experimental Investigations on Reduction of CO and HC in SI Engine with Catalytic Converter" – 20076555 (JSAE), 2007-32-0055(SAE), 2007.
24. Ghosh B.B., Santra P.K., Ghosh P.P., Banerjee T., Ghosh A and Ramanujam.S – "Catalytic Reduction of SI Engine emissions using Cu-ION Exchange ZSM-5" – SAE PaperNo.2001-26-0013.
25. Joseph R. Theis – "Selective Catalytic Reduction for Treating the NOx Emissions from Lean-Burn Gasoline Engines: Performance Assessment" – SAE Paper No.2008-01-0810.
26. Joseph R. Thesis – "Selective Catalytic Reduction for Treating the NOx Emissions from Lean-Burn Gasoline Engines: Durability Assessment" – SAE Paper No.2008-01-0811.
27. Juan M. Zumaro, Maria A.Ulla, Eduardo E. Miro – "Zeolite washcoating onto Cordierite honeycomb reactors for environmental applications" – Chemical Engineering Journal 106(2005)25-33.
28. Meille V (2006) Review on methods to deposit catalysts on structured surfaces Appl Catal A-Gen 315:1-17.

AUTHORS PROFILE



Elavarasan G received his Bachelor's degree in Automobile Engineering from MIT campus, Anna University, Chennai and masters degree in Energy Technology in SITE, Subharti University, Meerut. The author has published around 5 International journals with ISSN number. He is currently pursuing his Phd (Mechanical) in Annamalai University, Chidambaram.

His area of interest is emission control in internal combustion Engines.



D. Karthikeyan, Associate Professor in the Department of Mechanical Engineering, Annamalai University, Annamalai Nagar, Tamilnadu, India. He received Master of Engineering degree from Annamalai University in 2005. His area of specialization is IC engines and having more than fifteen years of experience in teaching and research field, Alternative fuels, Emission control techniques, after treatment devices in Automobiles are the area of interest for the author. Author is also working as an investigator of a project sponsored by NLC India.



C.G.Saravanan, Professor & Head of Mechanical Engineering, Annamalai University, Annamalai Nagar, Tamilnadu, India. He received his Doctor of Philosophy from Anna University, Chennai. He guided around 10 Ph.D scholars, and presently the research scholars of about 6 candidates are under his supervisions. He published more than 50 International reputed Journals and 60 National Journals. His area of specialization is Internal Combustion engines, Emission control techniques and alternate fuels.



P.Rajkrishnamoorthy, is a full time research scholar and also working as a junior research fellow in a sponsored project under the department of Mechanical Engineering, Annamalai University. The author received his bachelors and Masters degree from the same university. His areas of interest is emission control in internal combustion Engines.