

Influence of Grain Sizes on Undrained Strength of Sand Mixtures

Bakhtiar Affandy Othman, Aminaton Marto, Faizal Pakir, Amir Zaki Salikin

Abstract: Sand is known as the main material in land reclamation works to develop and widen an area. It is important for the Geotechnical Engineer to ensure the sand used can accommodate the burden imposed from the structures to be built on it. Previous researchers have conducted studies on the strength of sand, whether focusing on the sand itself or with the presence of fines. However, the study of sand grain size effects in sand mixtures in affecting sand behavior is extremely limited. The sizes and angularity of the sand particle are believed to contribute to the behavior of sand mixtures soil. Hence, the study to investigate the effect of sand grain size on sand mixtures in term of undrained strength is being carried out. The sand was sieved to coarse sand, medium sand and fine sand then each size was mixed with kaolin at 0 %, 20 % and 40 %. The undrained strength was obtained from triaxial test on undrained condition. As a result, it is found that the maximum deviator stress, q_{max} increases with the decrease of fines (kaolin) content. On the other hand, at the same fines content, increased of sand size leads to the increased of q_{max} , which means the increased of undrained shear strength. In addition, the angular shape of sand particle was thought to contribute to the high value of undrained shear strength for the sand mixtures.

Index Terms: Shear strength, kaolin, coarse sand, medium sand, fine sand.

I. INTRODUCTION

Sand in natural condition may have an amount of fines, whether as plasticity fines or non-plasticity fines or both. For many years, research related to the effects of fines content in sand fine mixtures was found well studied. In the past 5 years, studies on engineering behaviour of sand composed of various amount of fines have been conducted by [1], [2], [3], [4], [5], [6] and [7]. Loss of shear strength may lead to liquefaction phenomenon in granular soils. Shear strength of granular soils may decreased or increased with the presence of fines. This behaviour was proven by [8], in which they showed that the strength of mixtures reduced with increases of silt from 0 % to 30 %, then the strength increases thereafter. This transition is known as a threshold value. However, [9] show the transition occurs between 20 % to 40 % of fines content. As reported by [10] on the characteristics of liquefied soils, natural liquefied soils occurred at various fine content from 15 % to 70 % of fines. However, other factors as pointed

out by [11] such as confining pressure, type of soil, relative density of soil, particle size and gradation of the soil, depositional environment, aging and cementation as well as historical environment need to be considered.

The relationship of fines content with minimum void ratio, e_{min} and maximum void ratio, e_{max} had been studied by [12]. As mentioned by [13], the value of e_{max} and e_{min} are influenced by the grain shape, as example, decreases of angularity will decreased the value of e_{max} and e_{min} . Research conducted by [14] stated that the engineering behaviour of soils is influenced by the shape of particles. It can be seen from the study done by [15] on various types of sand such as natural sand and crushed sand; they found that the critical state parameters, Γ increase with decreased of particle shape in term of roundness, R . [16] highlighted that the frictional strength is strongly influenced by particle shape; as an example, shearing resistance increases with increases of angularity of particles due to the decreases of ratio of rolling to sliding contacts.

[17] summarized some results from year 1968 to 1999 on the effects of particle size gradation on liquefaction resistance. From the research results, some researchers claim that mean grain size (D_{50}) of 1.0 mm to 0.1 mm causes decreasing in liquefaction resistance, while some researchers show that the $D_{50} = 0.08$ mm is more susceptible to liquefaction. Based on the research done by previous researcher, evaluation on field case histories of liquefaction potential for 50 years around the world have been figured out by [18]. From Figure 1, [18] concluded that about 78 % liquefaction out of 155 incidents occur when the mean grain size, D_{50} is lied between 0.113 mm to 0.338 mm. [17] show that there is no relationship can be concluded between the coefficient of uniformity, C_U and coefficient of curvature, C_C with the cyclic resistance. The results have been shown to be in agreement with [19].

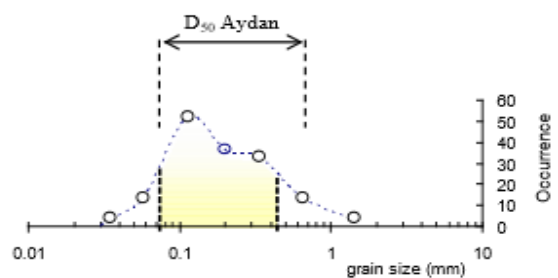


Figure 1 D_{50} for liquefied soils [18]

Revised Manuscript Received on July 10, 2019.

Bakhtiar Affandy Othman, Malaysia-Japan International Institute of Technology, Universiti Teknologi Malaysia, Kuala Lumpur, Malaysia.

Aminaton Marto, Malaysia-Japan International Institute of Technology, Universiti Teknologi Malaysia, Kuala Lumpur, Malaysia.

Faizal Pakir, Faculty of Civil and Environmental Engineering, Universiti Tun Hussein Onn Malaysia, Batu Pahat, Johor, Malaysia.

Amirzaki Salikin, Research Centre of Soft Soil (RECESS), Universiti Tun Hussein Onn Malaysia, Batu Pahat, Johor, Malaysia.

Hence, based on the findings from the literature above, the research on effect of different sizes of sand particles in sand mixtures is still lacking. Existing results are also not conclusive. Therefore, this paper reports some results of a study on investigating the influence of different sizes of sand in sand mixtures in terms of effect to undrained shear strength. Further results could be used to provide as an indicator on liquefaction resistance of sand mixtures. The GDS ELDYN[®] triaxial machine was used to carried out the main test (undrained triaxial test).

II. METHODOLOGY

A. Basic Properties

Tropical sand used in this study was obtained from a river at Johor Bahru, Malaysia which widely used as construction material. Kaolin as fines content was bought from Kaolin (M) Sdn. Bhd., Selangor which located approximately 300 km from Johor Bahru. As mentioned by [20], this kaolin is characterized with white colour and have a maximum dry density, $\rho_d = 1.64 \text{ Mg/m}^3$, optimum moisture content, $w_{opt} = 18 \%$, specific gravity, G_s range from 2.60 to 2.66, and liquid limit and plastic limit of 42 % and 21 %, respectively. [3] reported the same kaolin used in this research as reconstituted of sand mixtures is classified as intermediate plasticity silt (MI), according to United Soil Classification System (USCS). As reported before by [21], the tropical sand soil is classified as poorly graded (SP) with mean diameter, $D_{50} = 0.47 \text{ mm}$, $C_c = 0.86$ and $C_u = 2.14$. Particle density, ρ_s of the sand is 2.63 Mg/m^3 . Figure 2 illustrates the particle size distribution (PSD) of sand and kaolin used in this research.

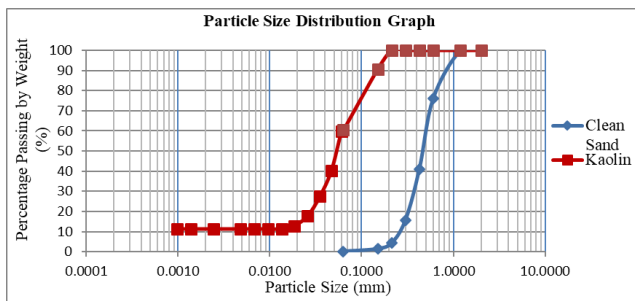


Figure 2 PSD of sand and kaolin in the current research [21]

Table 1 shows the compositional characteristics of reconstituted samples of various sizes of sand in sand mixtures. Through sieving, clean sands were separated into three different sizes range for coarse sand, medium sand and fine sand. Samples with three (3) different fines content for each sizes of sand were prepared for basic and isotropically consolidated undrained triaxial tests.

Table 1 Sand and kaolin composition in sand mixtures

The cylindrical sand mixtures samples (50 mm diameter and 100 mm height) were prepared on the triaxial pedestal using 5 layers with the thickness of 20 mm per layer. Relative density of 15 % (loose state) was prepared on all sand mixtures sample. Previous researchers have developed and

Soils Type	Code	Percentage by weight (%)	
		Sand	Kaolin
Sand (Coarse)	S100K0 -C	100	0
Sand (Coarse) + Kaolin	S80K20 -C	80	20
Sand (Medium)	S60K40 -C	60	40
Sand (Medium) + Kaolin	S100K0 -M	100	0
Sand (Medium) + Kaolin	S80K20 -M	80	20
Sand (Medium) + Kaolin	S60K40 -M	60	40
Sand (Fine)	S100K0 -F	100	0
Sand (Fine) + Kaolin	S80K20 -F	80	20
Sand (Fine) + Kaolin	S60K40 -F	60	40

utilized various techniques for preparing samples for laboratory testing. The effective techniques to prepare the high quality of sample close to the natural condition are important especially in triaxial testing. The grain structure arrangement remains the most influence factors that influenced the stress-strain behaviour of the sample prepared [22]. Various techniques such as moist tamping, dry or moist pluviation, air pluviation and dry funnel deposition on sample preparations of sandy soil on triaxial test to measure soil behaviour have been presented by previous researchers (examples; [23]; [24]; [22]; [5]; [25]). Moist or wet tamping technique is the most popular technique applied for sample preparation as used by past researchers such as [26]; [27]; [28]; [29]. Through this technique, the homogeneous of the sample can be produced ([17]; [25]; [30]). Due to that, moist tamping with 5 % moisture content was applied to each samples of sand matrix soils in this study. Isotropically consolidated undrained triaxial test was conducted according to [31].

Figure 3 shows the setting up of the samples on GDS ELDYN[®] triaxial machine. This machine has the ability to conduct a test up to 10 kN of vertical load and 5 Hz frequency for cyclic test.



Figure 3 Samples setup on triaxial machine



The cell was filled with de-aired water as a medium to provide the confining pressure [32], controlled by compressed air pressure. In saturation stage, when the B value is equal or more than 0.95, the sample is considered as fully saturated. After fully saturated condition achieved, 100 kPa effective consolidation pressure were applied to each sample types. After consolidation stage completed, the shearing with shear strain rate of 0.1 mm/min was applied until maximum strain reached 25 %.

In order to observe the particle shape of sand and kaolin in sand mixtures, Scanning Electron Microscope (SEM) was applied which provided by Microscopy Laboratory, Universiti Tun Hussein Onn Malaysia, Johor. Figure 4 illustrates the setting up of SEM machine.



Figure 4 JEOL (JSM-6380LA) series of SEM machine

III. RESULTS AND DISCUSSION

A. Microscopic Characteristics of Sand and Kaolin

SEM image of coarse, medium and fine sand are shown in Figure 5, 6 and 7, respectively. Based on the roundness, R introduced by [33], all three sand sizes have sub-angular shape. In general, when the particle sizes decrease, the surface area increased. This sub-angular shape contributed to higher shear strength compared to the rounded and well-rounded particles. As mentioned by [34], larger surface area leading to increase interaction to other particles. On the other hand, it can be said that, when saturated condition reached, the fine sand matrix soils tend to highly surrounded by water molecules compared to medium and coarse sand mixtures.

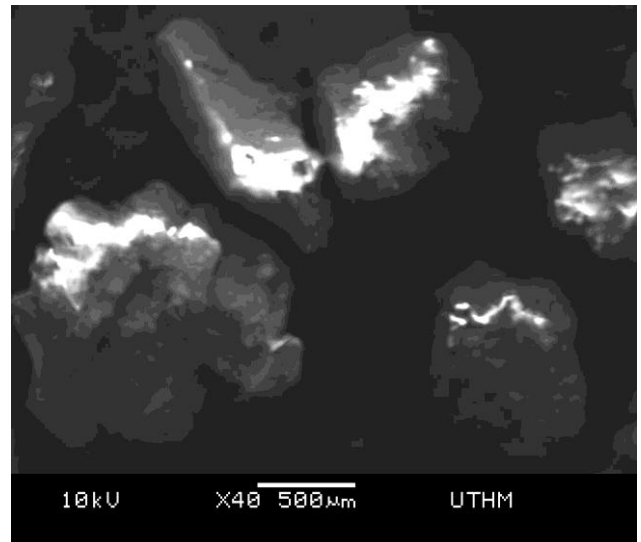


Figure 5 SEM image for coarse sand

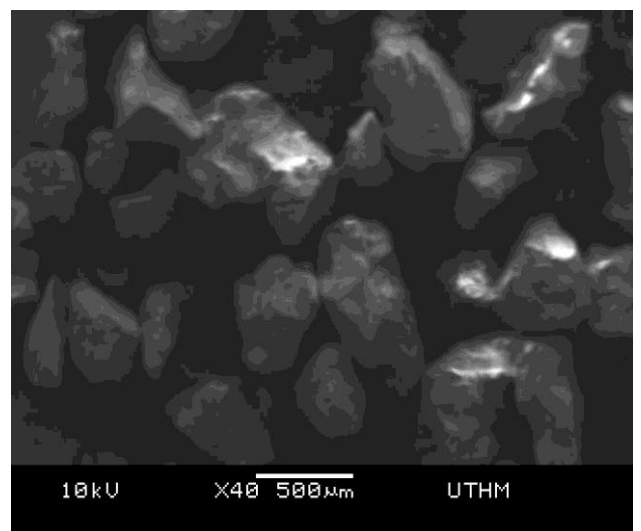


Figure 6 SEM image for medium sand

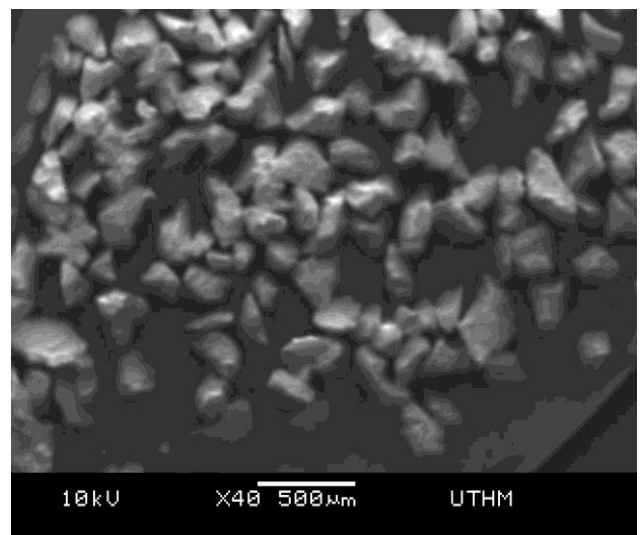


Figure 7 SEM image for fine sand

B. Particle Size Distribution (PSD)

Figures 9, 10 and 11 show the particle size distribution for coarse, medium and fine sand mixtures, respectively. According to the Figure 9,



mean grain size, D_{50} of coarse sand mixtures ranges from 0.72 to 1.10. It could be calculated from Figures 10 and 11, D_{50} ranges from 0.28 to 0.36 and 0.11 to 0.19, respectively. Based on this result, it can be deduced that D_{50} increases with decreases of fine content, and generally it can be said that the D_{50} decreases with decreases of sand particle size. From Figure 9, using Unified Soil Classification System (USCS), the coarse sand mixtures, S100K0-C is classified as poorly graded (SP) sand while S80K20-C and S60K40-C are classified as silty sand (SM). The coefficient of uniformity, C_u are 1.7, 46 and 90; and coefficient of curvature, C_c are 0.9, 17 and 0.5 respectively for S100K0-C, S80K20-C and S60K40-C.

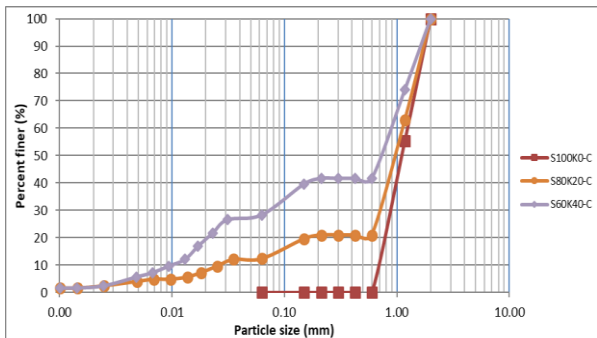


Figure 9 PSD of coarse sand mixtures.

Similar trend with coarse sand mixtures was observed for soil classification of medium sand mixtures and fine sand mixtures (Figure 10 and Figure 11). For medium sand mixtures, C_u lies between 1.6 and 30.0, while C_c lies between 0.9 and 7.1. For fine sand mixtures, C_u ranges from 2.2 to 13.0 and C_c ranges from 1.3 to 3.7

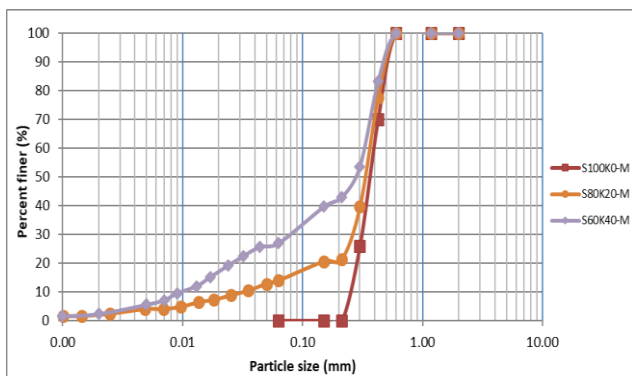


Figure 10 PSD of medium sand mixtures.

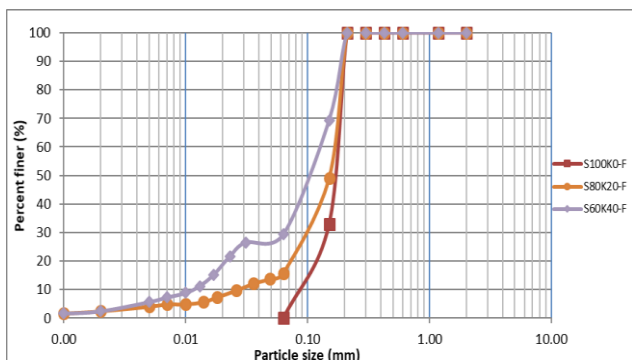


Figure 11 PSD of fine sand mixtures.

C. Isotropically Consolidated Undrained Triaxial Compression Test (CU)

A series of CU tests were conducted to the various sizes of sand mixed with different percentage of fines. Figures 12, 13 and 14 show the deviator stress-strain relationships of coarse, medium and fine sand mixtures, respectively. As can be seen from Figure 12, the maximum deviator stress, q_{max} of coarse sand mixtures decreases with increases of fine content. The q_{max} has occurred at strain of 19.62 % ($q_{max} = 354$ kPa), 24.83 % ($q_{max} = 232$ kPa) and 24.78 % ($q_{max} = 180$ kPa) for sample S100K0-C, S80K20-C and S60K40-C, respectively. The addition of fines to the sand increased the strain at failure.

Similar trend was observed on medium sand mixtures, however the value of q_{max} was decreased to 305 kPa, 202 kPa and 129 kPa for samples S100K0-M, S80K20-M and S60K40-M, respectively. Reverse behaviour occurred at fine sand mixtures at transition from 20 % to 40 % of fine content. The q_{max} measured was decreased from 218 kPa (S100K0-F) to 133 kPa (S80K20-F). However, q_{max} increases to 139 kPa for sample S60K40-F.

Results show that the q_{max} decreased with increased of fines content, and at certain value shows a reversible result. This kind of outcome is expected, as also reported by [9]. There is a concept of ‘threshold’ value. In the case of coarse and medium sand mixtures, it is found that no threshold value occurred until 40 % of fines. Threshold condition can be explained as where the transition condition of fines particle filling the voids between sand particles and become a dominant particle than sand (exceeds the void between sand grain). From the results, it can be inferred that for fine sand matrix soils the threshold value occurred between 20 % of fines and 40 % of fines. Since it was not observed, more percentage of fines needs to be added to coarse and medium sand to determine the threshold values

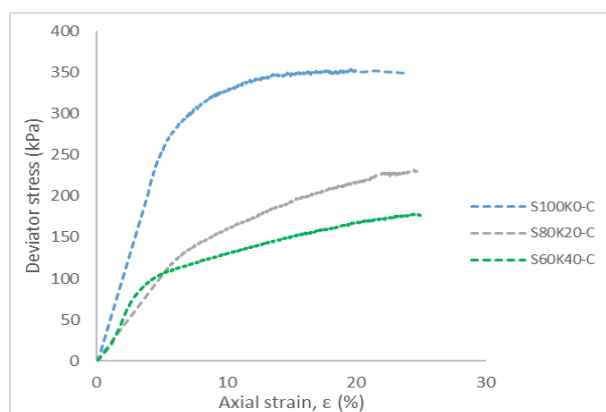


Figure 12 Deviator stress versus axial strain of coarse sand mixtures

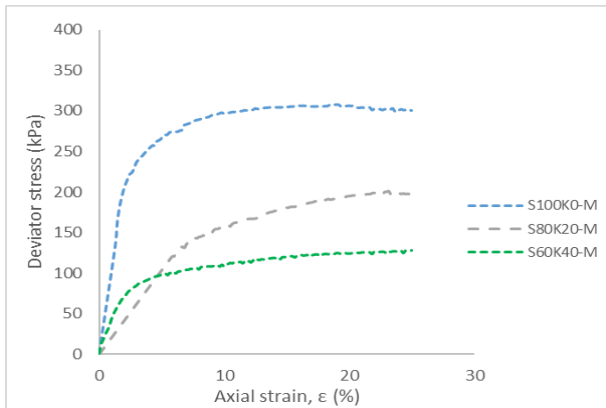


Figure 13 Deviator stress versus axial strain of medium sand mixtures

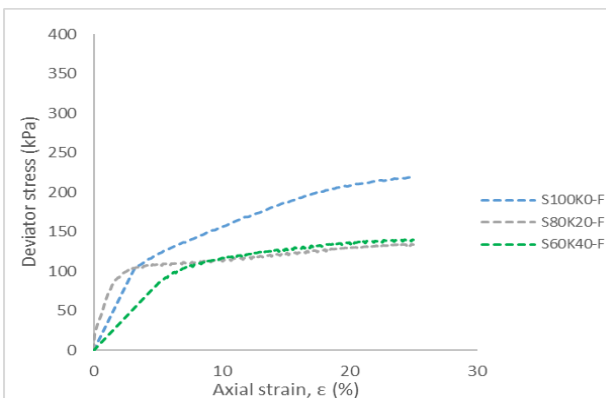


Figure 14 Deviator stress versus axial strain of fine sand mixtures

IV. CONCLUSION

- (1) Mean grain size, D_{50} increases with decreases of fine content, and generally the D_{50} decreases with decreases of particle size of sand. The coarse, medium and fine sands used have sub-angular shape.
- (2) Maximum deviator stress, q_{max} increases with decreases of fines content. At the same fines content, the increase of size of sand leads to the increase of maximum deviator stress, or can be said as the undrained shear strength.
- (3) Maximum deviator stress, q_{max} of 354 kPa was observed as the highest at S100K0-C, while S100K0-M and S100K0-F were observed at 305 kPa and 218 kPa, respectively. Without fines content, q_{max} increases with the grain size.
- (4) Maximum deviator stress, q_{max} was observed to occur at the strain between 19 % and 25 % for all sand mixtures. The addition of fines increases the strain at failure.

Threshold value had occurred between 20% and 40% of fines content for fine sand mixtures but it was not observed for coarse and medium sand mixtures for up to 40% fines content.

ACKNOWLEDGMENT

This research is collaboration between researchers from Malaysia-Japan International Institute of Technology (MJIT), UTMKL and researchers from Research Centre of Soft Soil (RECESS), UTHM, Batu Pahat Johor through

financial support by FRGS, Ref.: R.J130000.7822.4F849 and TIER 1 Grant Vot. H234, respectively. Thank you to Ministry of Higher Education (MOHE), Malaysia for that financial support and MJIT, UTM for the financial assistance given.

REFERENCES

1. A. Marto, C.S. Tan, A.M. Makhtar, N.Z. Mohd Yunus, A. Amaludin, 2013. Undrained shear strength of sand with plastic fines mixtures. *Malaysian Journal of Civil Engineering* 25(2):189-199(2013).
2. A. Marto, C.S. Tan, A.M. Makhtar, 2014. Critical state of sand matrix soils. *The scientific world journal*. Volume 2014, Article ID 290207, page 1-7. DOI: <http://dx.doi.org/10.1155/2014/290207>
3. C.S. Tan, 2015. Effect of Fines Content and Plasticity on Liquefaction Susceptibility of Sand Matrix Soils. PhD Thesis, Universiti Teknologi Malaysia.
4. Y. Wei, X. Wu, C. Cai, 2015. Splash erosion of clay-sand mixtures and its relationship with soil physical properties: The effects of particle size distribution on soil structure. *Catena* 135 (2015) 254–262. DOI: <http://dx.doi.org/10.1016/j.catena.2015.08.003>
5. M.M. Monkul, E. Etminan, A. Şenol, 2016. Influence of coefficient of uniformity and base sand gradation on static liquefaction of loose sands with silt. *Soil Dynamics and Earthquake Engineering* 89 (2016) 185–197. DOI : <http://dx.doi.org/10.1016/j.soildyn.2016.08.001>
6. D.C. Simpson, T.M. Evans, 2016. Behavioral Thresholds in Mixtures of Sand and Kaolinite Clay. *Journal of Geotechnical and Geoenvironmental Engineering*, © ASCE, ISSN 1090-0241/04015073(10).
7. M.M. Monkul, E. Etminan, A. Şenol, 2017. Coupled influence of content, gradation and shape characteristics of silts on static liquefaction of loose silty sand. *Soil Dynamics and Earthquake Engineering* 101(2017)12-26. DOI : <http://dx.doi.org/10.1016/j.soildyn.2017.06.023>
8. H. Bahadori, A. Ghalandarzadeh, I. Towhata, 2008. Effect of Non Plastic Silt on the Anisotropic Behaviour of Sand. *Soils and Foundations*. Vol. 48, No. 4, 531-545, Aug. 2008. Japanese Geotechnical Society.
9. M. Derakhshandi, E.M. Rathje, K. Hazirbaba, S. M. Mirhosseini, 2008. The Effect of Plastic Fines on The Pore Pressure Generation Characteristics of Saturated Sands. *Soil Dynamics and Earthquake Engineering*. 28(5): 376–386. DOI: 10.1016/j.soildyn.2007.07.002
10. C.S. Tan, A. Marto, T.K. Leong, L.S Teng, 2013. The Role of Fines in Liquefaction Susceptibility of Sand Matrix Soils. *Electronic Journal of Geotechnical Engineering*, 18L: 2355-2368.
11. R.W. Day, 2012. *Geotechnical Earthquake Engineering Handbook*. Second Edition. 2012 The McGraw-Hill Companies, Inc.
12. M. Cubrinovski, K. Ishihara, 2002. Maximum and minimum void ratio characteristics of sands, *Soils and Foundations*, 42(6), 65–78.
13. B.M. Das, N. Sivakugan, C. Atalar, 2012. Maximum and minimum void ratios and median grain size of granular soils: their importance and correlations with material properties. 3rd International Conference on New Developments in Soil Mechanics and Geotechnical Engineering, 28-30 June 2012, Near East University, Nicosia, North Cyprus. Pg. 37-54.
14. N.D. Nik Norsyahariati, K.R. Hui, A.G.A. Juliana, 2016. The Effect of Soil Particle Arrangement on Shear Strength Behavior of Silty Sand. *MATEC Web of Conferences* 47, 03022 (2016). DOI: <https://doi.org/10.1051/mateconf/20164703022>
15. G.C. Cho, J. Dodds, J.C. Santamarina, 2006. Particle Shape Effects on Packing Density, Stiffness, and Strength: Natural and Crushed Sands. *Journal of Geotechnical and Geoenvironmental Engineering*, Vol. 132, No. 5, May 1, 2006. ©ASCE, ISSN 1090-0241/2006/5-591–602 DOI: 10.1061/(ASCE)1090-0241(2006)132:5(591).
16. K. Mair, K.M. Frye, Maronez. 2002. Influence of grain characteristics on the friction of granular shear zones. *Journal of Geophysical Research*, 107(10), 41 – 49, (2002). DOI : <https://doi.org/10.1029/2001JB000516>
17. Y. Yilmaz, M. Mollamahmutoglu, V. Ozaydin, K. Kayabali, 2007. Experimental Investigation of the Effect of Grading Characteristics on the Liquefaction Resistance of Various Graded Sands. *Engineering Geology* 100 (2007) 91-100. Elsevier.

18. A. Hakam, F.A. Ismail, & Fauzan. 2016. Liquefaction Potential Assessment Based on Laboratory Test. *International Journal of GEOMATE*, Oct., 2016, Vol.11, Issue 26, pp. 2553-2557. Japan.
19. A.J. Choobasthi, A. Ghalandarzadeh, M. Esmacili, 2014. Experimental Study of the Grading Characteristic Effect on the Liquefaction Resistance of Various Graded Sands and Gravelly Sands. *Arab. J Geosci* (2014) 7:2739-2748. DOI 10.1007/s12517-013-0886-5. Springer.
20. A. Marto, M. Abukar Hassan, A.M. Makhtar, B.A. Othman, 2013. Shear strength improvement of soft clay mixed with Tanjung Bin coal ash. ICESD 2013: January 19-20, Dubai, UAE. APCBEE Procedia 5 (2013) 116-122. DOI : 10.1016/j.apcbee.2013.05.02
21. B.A. Othman, A. Marto, 2018. Laboratory test on maximum and minimum void ratio of tropical sand matrix soils. IOP Conf. Ser.: Earth Environ. Sci. 140 012084. DOI :10.1088/1755-1315/140/1/012084
22. A. Juneja, M.E. Raghunandan, 2010. Effect of Sample Preparation on Strength of Sands. Indian Geotechnical Conference – 2010, GEOTrendz. December 16–18, 2010. IGS Mumbai Chapter & IIT Bombay
23. J.A. Yamamuro, P.V. Lade, 1997. Static Liquefaction of Very Loose Sands. *Can. Geotech. J.* 34:905-917 (1997).
24. M. Yoshimine, R. Koike, 2005. Liquefaction of Clean Sand with Stratified Structure Due to Segregation of Particle Size. *Soils and Foundations*. Vol. 45, No.4, 89-98, Aug. 2005 Japanese Geotechnical Society.
25. A.E. Takch, A. Sadrekarimi, H. El. Naggat, 2016. Cyclic Resistance and Liquefaction Behavior of Silt and Sandy Silt Soils. *Soil Dynamics and Earthquake Engineering*. 83(2016)98-109. Elsevier.
26. W. Chang, M. Hong M., 2008. Effects of Clay Content on Liquefaction Characteristics of Gap-Graded Clayey Sands. *Soils and Foundations* Vol. 48, No. 1, 101–114, Feb. 2008 Japanese Geotechnical Society.
27. Y. Wang, Y. Wang, 2010. Study of Effects of Fines Content on Liquefaction Properties of Sand Yong. GeoShanghai 2010 International Conference. *Soil Dynamics and Earthquake Engineering*.
28. J. He, J. Chub, H. Liu, 2014. Influence of coefficient of uniformity and base sand gradation on static liquefaction of loose sands with silt. *Soils and Foundations* 2014;54(4):910–916 DOI : <http://dx.doi.org/10.1016/j.sandf.2014.06.020>
29. V.T. Phan, D. Hsiao, P.T. Nguyen, 2016. Effects of Fines Contents on Engineering Properties of Sand-Fines Mixtures. *Procedia Engineering* 142 (2016) 213 – 220. DOI: 10.1016/j.proeng.2016.02.034
30. A.I. Papadopoulou, T.M. Tika, 2016. The effect of fines plasticity on monotonic undrained shear strength and liquefaction resistance of sands. *Soil Dynamics and Earthquake Engineering* 88 (2016) 191–206. DOI : <http://dx.doi.org/10.1016/j.soildyn.2016.04.015>
31. BS 1377:1990. Methods of Test for Soils for Civil Engineering Purposes.
32. S. Ree, 2013. What is Triaxial Testing? Part 1 of 3. Published on the GDS website www.gdsinstruments.com
33. T.L. Youd, (1973). Factors controlling maximum and minimum densities of sands. Evaluation of Relative Density and Its Role in Geotechnical Projects Involving Cohesionless Soils (STP 523), ASTM, Philadelphia, 98-122.
34. Y. Huang, L. Wang, 2008. Microscopic characteristics of nanoparticles for seismic liquefaction mitigation. The 15th Asian Regional Conference on Soil Mechanics and Geotechnical Engineering. <http://doi.org/10.3208/jgssp.CHN-08>.

Energy Pile, Disaster Risk Management and many more. To date, she has more than 200 publications in the form of journals, conference proceedings, books and research reports.



Dr. Faizal Pakir, PhD, is a lecturer at the department of Civil Engineering, Faculty of Civil and Environmental Engineering at the UTHM, Johor, Malaysia. He is a senior researcher of the Research Centre of Soft Soil (RECESS), Integrated Engineering Institute (I²E). He is also a member of the Board of Engineers Malaysia (BEM). He has published more than 30 peer review research articles. Dr. Faizal work has been published in engineering, material research and environmental journals including: the International Journal of Recent Technology and Engineering, the International Journal of Integrated Engineering, the KSCE Journal of Civil Engineering, the Jurnal Teknologi and the Advanced materials research



Mr. Amirzaki Salikin is a senior assistant engineer at the Research Centre of Soft Soil (RECESS), Integrated Engineering Institute (I²E), UTHM, Johor, Malaysia. He has a high knowledge and 15 years' experience to a geotechnical and geology experimental method. Mr. Amirzaki has a Certificate of Civil Engineering from Dickson, Malaysia. He also has a Diploma in Civil Engineering from Politeknik Merlimau, Malaysia.

AUTHORS PROFILE



Bakhtiar Affandy Othman, he is a postgraduate student at Malaysia-Japan International Institute of Technology (MJIT), UTMKL, Malaysia. He obtained his Master in Geotechnical Engineering from UTM, Johor, Malaysia. His interest is in geotechnical engineering, finite element model, and seismic engineering. More than

20 publications have been published in the form of proceedings, journals, seminars and book chapters.



Aminaton Marto, PhD, she is a Professor at Malaysia-Japan International Institute of Technology (MJIT), UTMKL, Malaysia. Currently, she is research Fellow of Disaster Preparedness and Prevention Centre (DPPC), MJIT, UTMKL and Associate Fellow at the

Tropical Geo-Engineering (GEOTROPIK), ISIIC, UTM, Malaysia. Her main research is in the field of Soft Soil Engineering which include soil characterization, soil improvement, tunneling through soft soil, etc. Other research area includes Geotechnical Earthquake Engineering, Geothermal

