

# Home Automation using Esp-8266

Shivani Vispute, Aakarsh Nayyar, Y.P.Obulesu

**Abstract:** Home automation is advancing in most sectors of the world, people are finding ways to make their life simpler and more efficient. Most of the home automation devices use raspberry pi and various sensors. Many of the device are inculcated with hand gesture recognition algorithms in order to make them more user friendly. This system is based on Wi-Fi signals and communication takes place over a particular bandwidth of the Wi-Fi. The system takes into usage a Wi-Fi technology thus it provides universal access to the system for automated control of appliance. ESP-8266 is the vital component of this project that helps in communication using Wi-Fi protocol. The main objective that lies behind this project is the inspection of controlling of the home appliances distantly while keeping it cost effective. The motivation behind the project was to enable users to make their home automatic and have distantly unanimous control. The home gadgets controller framework with an operational expense was viewed as fabricated that ought to be transferrable giving removed access controlling plan to the machines.

Thus the analysis comprises the working of the Wi-Fi module along with various censors and IC's. ESP-8266 helps the user to control the device from anywhere around the globe using the mobile application.

**Index Terms:** ESP-8266, Home Automation, Wi-Fi Module, Wi-Fi Protocol

## I. INTRODUCTION

The device is designed to provide effortless management of consumer's home. The principle belief system related with this project is getting the imparted sign from the cell phone and further handling it as required to play out the necessary activities. A signal from mobile application is sent to the hardware module. ESP-8266 is connected to the Wi-Fi present around the device which helps it to connect to the internet and create a server. The mobile application is connected to the same server and helps in sending signals to the hardware module. A microcontroller which is incorporated with the ESP-8266 module helps in receiving the command and further holds the operation on the hardware module. In the present day, automation has become one of the eminently attractive areas that play an important role in day to day life [17]. Home vitality utilization will in general develop in extent to increment of expansive estimated home machines. Vitality utilization must be improved to diminish carbon dioxide discharges [18]. The idea of home data changes in various businesses. The last objectives of home data framework are to furnish family with different administrations and applications so as to make family life enjoyable, comfortable, convenient, and secure [19]. In an IoT; the MQTT is a popular topic-based protocol [1]. The paper broadens the theme method by building up another

model in respective IoT idea which is Web of Topics (WoX). This epic structure demonstrate lessens the hole among plan and arrangement area in the IoT. Explosive development amongst the quantity of "things" or gadgets that will be associated with the Internet. The subsequent organize is known as the "Web of Things" (IoT) [15]. The sensors would produce expansive measure of information which should be broken down, translated and used [16]. Home Automation System utilizes the improvement of Internet of Things for watching and controlling of the electrical and electronic machines at home from any remote district by fundamentally utilizing a cell phone. The MQTT publish/subscribe informing convention gives capacities to transfer or receive sensor information [2]. This paper has made a confirmed domestic atomization structure using the MQTT tradition besides ACL for encryption of sensor data. MQTT informing convention gives a hearty informing highlights which is required for correspondence amid the remote framework and household gadgets through utilization of slight system data transfer capacity. [3] This paper has made a checked home automated system using MQTT tradition and moreover ACL for encryption of sensor information. For controlling all home applications android software is used. Using Android software, we can control the applications such as light, fan, TV and other applications. [4] In GHMI hand signal is utilized rather than Android programming. The VPL DataGlove was worked by Thomas Zimmerman, who likewise licensed the optical flex sensor utilized by gloves. The DataGlove was a texture glove with two fiber optic circle on each finger. In the event that a client had additional expansive or little hand, the circle won't compare to real position and the client won't probably create precise signal. At one end of each loop there is LED and at other end there is photo sensor. [5] At the point when finger is bowed, the light break from fiber optic link. The measure of light achieving the photograph sensor was estimated and changed over into a proportion of how much finger was twisted. Valdimir Vujoic explains the implement of sensor as Internet of Things (IOT) using Raspberry Pi. [6] The IOT technology provides various advantages such as security, safety, cost saving etc. In this project IOT is used for door security such that if door bell is pressed the message will send to owners mobile that someone is at the door. Automation makes a proficient as well as a prudent utilization of the power and water and diminishes a great part of the wastage [7]. Crafted by John J. Greichen [8] analyzed a bit of the early challenges looked through home motorization structures. They join raised gathering charges, high movement costs, high establishment costs, extra association costs alongside the support costs, nonappearance of home computerization rules, customer originality to innovation, and complex UIs.

**Revised Manuscript Received on September 25, 2020.**

**Shivani Vispute**, Electrical and Electronics(EEE), VIT University, Vellore, India.

**Aakarsh Nayyar**, Electrical and Electronics(EEE), VIT University, Vellore, India.

**Prof. Dr. Y.P.Obulesu**, Department of Energy and Power Electronics ,School of Electrical Engineering , VIT University, Vellore, India.

The Home-based mechanization framework that utilizes Wi-Fi innovation [9]. Structure contains three standard fragments; web server, which presents system focus that controls, and screens customers' home and gear interface module(Arduino PCB (moment), Wi-Fi shield PCB, 3 information alarms PCB, and 3 yield actuators PCB.), which gives fitting interface to sensors and actuator of home automation system. Shih-Pang Tseng et al [7] proposed Smart House Monitor and Manager in view of the ZigBee; all sensors and actuators are associated by a ZigBee remote system; proposed Smart House Monitor & Manager in light of the ZigBee. All sensors and actuators are related by ZigBee remote framework. PIC16F887 microcontroller for home apparatuses controls with GSM for control of the machines [10]. It has high transparency, fuse and security alongside the expense of SMS. AT headings can be sent through the GSM structure to controls the home gadgets. Arduino board is the controller used to control the machines by utilizing GSM progression. It utilizes certain outskirts drivers and trades to accomplish this interfacing. The application on wireless makes SMS messages subject to the customer headings and sends it to GSM modem joined to Arduino and control the home appliances [11]. It has been organized Arduino board along with Bluetooth board were produced for home automation [12]. Implanted system Raspberry Pi to fill in as correspondence section between mobile phones and Konnex-Bus home automization structures [13]. The home structure which screens the machines, sensors and transmits data to the cloud-based data server which manages the information and offers organizations to consumers by communicating data and getting consumer headings from adaptable application [14]. In [20] plan and highlights of a Smart Home Automation System have been appeared. It is Bluetooth based, thus remote and can be adaptable. It has an extraordinary element for savvy discourse sense, which would decipher clients' sentences into proper directions. In [21] the shrewd home computerization based framework is structured which comprises of portable telephone and GSM modem. In this framework, plan, moving forward message is sent from the customer cell to GSM appears as a text by methods of cell sort out. In [22] gives a novel designing for home computerization structure which is proposed furthermore executed, using respectably new correspondence development ZigBee. The use of ZigBee correspondences development cuts down the expense of the structure and the discourteousness of the specific system foundation.

### II. MICROCONTROLLER NODE MCU

- Creator: ESP-8266 Open source Community
- Category: Single-board MCU
- OS: XTOS
- CPU: ESP8266
- Memory Unit: 128 Kbytes
- Capacity: 4 MBytes
- Power Using: USB
- Power Voltage: 3v; 5v
- Code: Arduino Cpp
- IDE Used: Arduino IDE
- GPIO: 10

NodeMCU is an open source IoT plan. Which wires firmware which keeps running on the ESP-8266 Wi-Fi Module from Espressif Systems, and rigging which depends upon the

ESP-12 module. The verbalization "NodeMCU" according to regular infers the firmware rather than the dev units. NodeMCU firmware was made so that AT course can be uprooted with Lua scripting making the life of organizers less mentioning. So it is excess to use AT course again in NodeMCU.



Figure 1 Node MCU

### III. OPTOTRIAC

The MOC3010 Series comprises of gallium arsenide infrared discharging diodes, optically coupled to silicon two-sided switch and are intended for applications requiring secluded triac activating, low- current separated air conditioning exchanging, high electrical seclusion (to 7500 Vac crest), high locator standoff voltage, small size, and low cost.

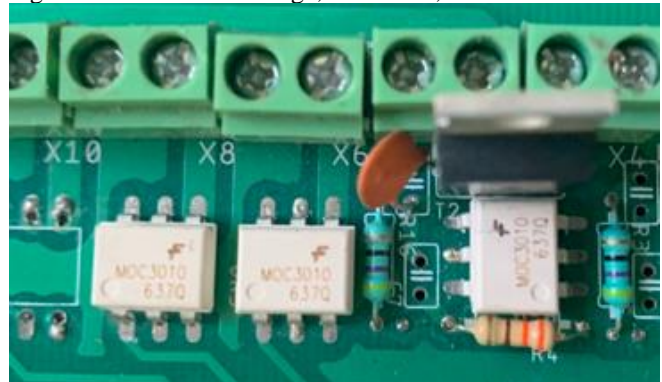


Figure 2 Optotriac

### IV. LM7805, VOLTAGE REGULATOR

This is utilized for making the voltage stable at +5V for circuits. The LM7805 is three terminal positive regulators. These are open in the heap of TO-220 and with a couple of settled yield voltages, which makes them profitable in a wide extent of employments. Each sort interfaces with inward current limiting, warm shut down and safe working terrain assurance, which makes it fundamentally indestructible. They can convey over 1A yield current by giving satisfactory warmth sinking. Despite the fact that it structured principally as settled voltage controllers it has numerous significance, for more data please allude Data sheet Of LM7805.

## V. ABOUT LINK LAYER

The association layer contains physical associations between the two gadgets, either an Ethernet connect, or a Wi-Fi affiliation. This is the layer that is nearest to the set-up of the gear.

To associate an ESP-8266 to the system, the Wi-Fi needs to be connected. Connection can occur in two distinctive ways:

- ESP-8266 interfaces with the remote passage. An AP can be worked in to your modem/switch, for instance.

In this prearrangement, the ESP exhibitions like a remote station.

- ESP-8266 goes about in a passageway also, remote stations can interface with it. These stations can also be your workstation, either a cell phone, or much another ESP in station mode.

When Wi-Fi connect has been built up, the ESP-8266 is a part of a neighborhood (LAN). All appliances on a LAN can speak with one another.

More often than not, the AP is associated with a physical Ethernet organize too, this implies the ESP-8266 is capable of also talking with appliances or devices that are associated with an AP (switch) by means of the underwired Ethernet association (laptops, gaming consoles and set-top boxes, etc for example).

On remote possibility that the ESP-8266 is among the path mode, it can converse with any station that is connected with it, and two stations (for example a workstation and a telephone) can in like way talk with one another.

## VI. ABOUT INTERNET OR NETWORK LAYER

Regardless of the way that the devices are allied physically they can't generally converse with one another yet, in light of the way that they get no opportunity to acknowledge wherever to send the message to. That is the area the Internet Protocol (IP) comes in. Each device on the framework has an individual IP address. The DHCP server (Dynamic Host Configuration Protocol Server) guarantees that the addresses are standing out. This suggests you would now have the capacity to establish a connection in a specific area.

There are two different types of Internet Protocol; IPv4 and IPv6. IPv6 is an improved variation of IPv4 and has generously a bigger number of areas than IPv4 (in light of the fact that there are essentially a greater number of contraptions than open IPv4 addresses). In this paper, we'll only talk about IPv4 addresses, since most LANs still use them.

The IP address contains 4 numbers, for example 192.168.1.5 is a significant IPv4 address. It truly includes two areas: the underlying portion is 192.168.1, it is the location given to the nearby system. The latter digit, 5 for the situation, is explicit for the device.

By utilizing IP addresses, we can discover the ESP-8266 on the system, and send messages to it. The ESP-8266 can likewise discover our PC or our telephone, in the event that it realizes their particular IP addresses.

## VII. DESIGN OF THE SYSTEM

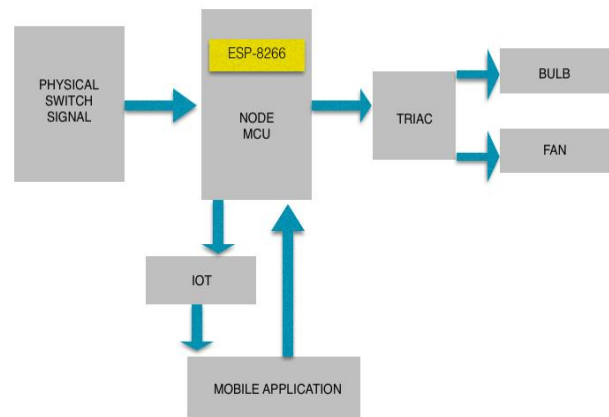


Figure 3 Design of system

NodeMCU acts as the center of the device which thereby is represented as the brain. It receives signals from the physical switch which thereby determines its state. Similarly, it also receives signals from the mobile application in order to determine the state of the pseudo switch (which is the mobile application which helps the user to control the mobile application). Hence, NodeMCU compares both the states of the physical switch as well as the mobile application by running an algorithm which further provides signal to the Triac. The Triac acts as a relay which further controls the appliances connected to it. Hence, the above mentioned is the basic principle on how the system has been designed to provide luxury to the user and making their home more manageable.

## VIII. METHODOLOGY

### A. Functioning of the device

Idea behind the device lies around the ideology that least efforts are made by the consumer and to provide luxury in the day-to-day life of the user. The hardware device, goes behind the switch board without disturbing the normal functionality of the switch board, thereby providing the user with manual as well as automated functioning of the switch board. The device is onboarded with the mobile application using a unique ID that is provided on the device. This unique ID helps the user to make his device secure. The device is setup according to the user's interface. The appliance that is connected to the device helps the user to make the interface along with operating it. In order to operate the appliance, the user sends information from the mobile application. The signal is thereby received by the server which further sends it to a particular device ID. ESP-8266 which is connected to the server receives the signal and hence processes the required functionality as per requested by the user, which in result make the appliance work according to the user. A feedback loop is made that helps in increasing the efficiency of the product. The feedback loop is generated from the Node MCU that sends the signal back to the server which further updates the mobile application regarding the same. Hence, the user is provided with the data whether the appliance worked or not.

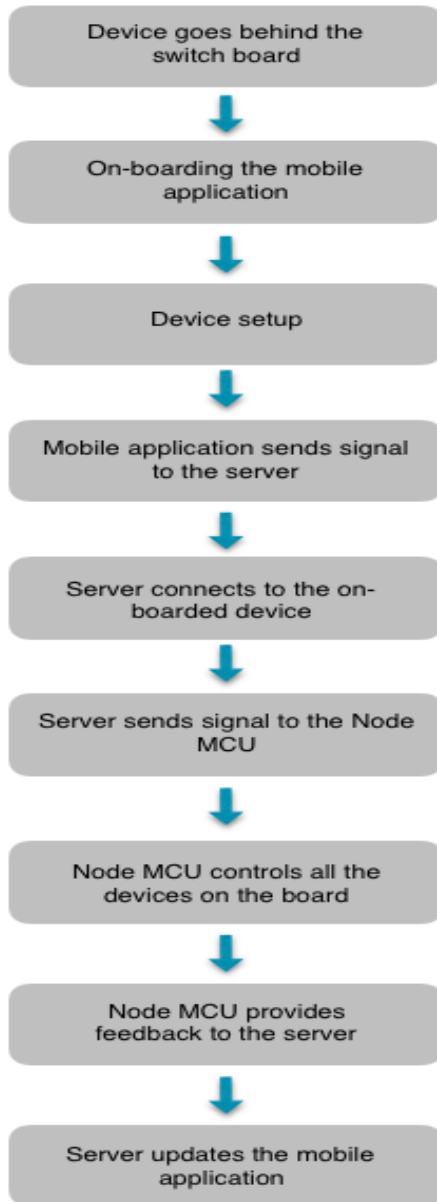


Figure 4 Flowchart for functioning of device

B. Functioning of NodeMCU

The signal received by the Node MCU over the Wi-Fi protocol is recorded in the memory. Another signal coming from the state of the physical switch is also recorded simultaneously. Both the signals are run in an algorithm, comparison is made between the two. If both the signals are of the same digital state, a command is sent according to the same state which further controls the appliance. Where as the commands are different another algorithm is run to decide the preference of the signal according to the input. The preference is chosen on the previous stored data on the memory. Hence, the command is decided and sent to the appliance.

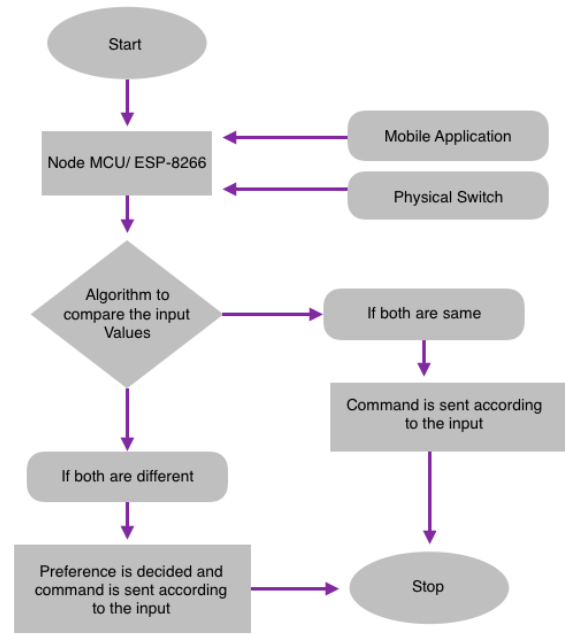


Figure 5 Flowchart for functioning of Node MCU

IX. CONCLUSION

The project we have worked on helps us to conclude on many aspects which relate technical as well as user experience. The user is provided with the ease to control all the appliance inside a room with minimal efforts possible, with a single touch on the mobile application of their smartphone. The user is provided with the best and cheap technology keeping in mind the size of the device, in order to reduce the space which takes to install the device, therefore, the device is planned so that it goes behind the switch board without altering it. Thus the device makes it possible to control any appliance including a bulb, fan, or an air-conditioner along with controlling the intensity of the fan speed and bulb intensity. Also it is possible to use the device around the globe at any point of time. The final device will be having a better precision in all the fields, with a much better design and cost effectiveness and making it much user friendly as a possible. This will be basic as a result of the wide scope of specialized information that ventures have.

REFERENCES

1. L. mainetti, L.Manco, L.Patrono, I.Sergi, R. Vergallo, Web of Topics:An IoT aware Model-driven Designing approach, 2015 IEEE 2nd World Forum on, 14-16 Dec 2015.
2. Yuvraj Upadhyay, Mr.Amol Borole, Mr.D.Dileepan, MQTT Based Secured Home Automation System, 2016 Symposium on Colossal Data Analysis and Networking (CDAN) [1].
3. Valerine Lampkin, Weng Tat Leong, Leonardo Olivera, Sweta Rawat, Nagesh Subrahmanyam, Rong Xiang, Building Smarter Planet Solutions with MQTT and IBM WebSphere MQ Telemetry, First Edition, September 2012. [2].
4. Deepali Javale, Mohd Mohsin, Shreerang Nandanvar, Mayur Shingate, "Home automation & security using Android ADK", International Journal of Communication and Computer Technology (IJECCT) Volume 3 Issue 2, March 2013.



5. Shiguo Lian, Wei Hu, Kai Wang, "Automatic User State Recognition for Hand Gesture Based Low-Cost Control System", IEEE, 2014.
6. Valdimir Vujoic, Mirjana Makshimovic, "Raspberry Pi a sensor Web node for home automation" Elsevier on Computer and Engineering 42(2015).
7. Shih-Pang Tseng, Bo-Rong Li, Jun-Long Pan, and Chia- Ju Lin, "An Application of Internet of Things with Motion Sensing on Smart House", 978-1-4799-6284- 6/14 © 2014 IEEE.
8. Greichen, J.J., "Value based home automation or today's market," IEEE Transactions on Consumer Electronics, vol. 38, no. 3, pp.34-38, Aug. 1992
9. Ahmed ElShafee, Karim Alaa Hamed, "Design and Implementation of a WiFi Based Home Automation System", International Journal of Computer, Electrical, Automation, Control and Information Engineering Vol: 6, No: 8, 2012.
10. Rozita Teymourzadeh, Salah Addin Ahmed, Kok Wai Chan and Mok Vee Hoong, "Smart GSM Based Home Automation System", 2013, IEEE Conference on Systems, Process & Control, Kuala Lumpur, Malaysia.
11. Mahesh.N.Jivani, "GSM Based Home Automation System Using App-Inventor for Android Mobile Phone", 2014, International Journal of Advanced Research in Electrical, Electronics and Instrumentation Engineering, Vol. 3(9), pp. 12121-12128.
12. R.Pivare, M.Tazil, "Bluetooth Based Home Automation System Using Cell Phone", 2011, IEEE 15th International Symposium on Consumer Electronics Singapore, pp.192- 195.
13. Jan Gebhardt, Michael Massoth, Stefan Weber and Torsten Wiens, "Ubiquitous Smart Home Controlling Raspberry Embedded System", UBICOMM: The Eighth International Conference on Mobile Ubiquitous Computing, Systems, Services and Technologies, 2014.
14. Kim Baraka, Marc Ghobril, Sami Malek, Rouwaida Kanj, Ayman Kayssi, "Smart Power Management System For Home Appliances And Wellness Based On Wireless Sensors Network And Mobile Technology", 2015 XVIII AISEM Annual Conference, 978-1-4799-8591-3/15©2015 IEEE
15. D. Norris, The Internet of Things: Do-It-Yourself at Home Projects for Arduino, Raspberry Pi and BeagleBone Black. Tab Electronics, 2015.
16. D. Giusto, A. Iera, G. Morabito, and L. Atzori, The Internet of Things. New York, NY: Springer New York, 2010.
17. David N. et al., "Design of Home Automation", International Journal of Scientific & Engineering Research, Volume 6, Issue 6, 2015, ISSN 2229-5518
18. Kushiro N. et al., "Integrated home gateway controller for home energy management system", IEEE International Conference on Consumer Electronics, pp.386-387, 2003, DOI: 10.1109/TCE.2003.1233787.
19. Pu L., "An Improved Short Message Security Protocol for Home Network", Proc. 2009 International Conference on Future Computer and Communication (FCC '09), Wuhan, pp.62-65, 2009, DOI: 10.1109/FCC.2009.12
20. Pandya B. et al., "Android based Home Automation System using Bluetooth & Voice Command" in International Research Journal of Engineering and Technology (IRJET) Volume: 03 Issue: 03, 2016, ISSN: 2395-0072
21. Teymourzadeh R. et al., "Smart GSM Based Home Automation System", IEEE Conference on Systems, Process & Control (ICSPC2013) Kuala Lumpur, Malaysia, 2013
22. Gill K. et al., "A ZigBee-Based Home Automation System" in IEEE Transactions on Consumer Electronics, Vol. 55, No. 2, 2009, DOI: 10.1109/TCE.2009.5174403.