

Anti-Lock Braking System Components Modelling



Khalid M. Algadahl, Abdulaziz S. Alaboodi

Abstract: Anti-lock braking systems are widely used in modern vehicles and provide safe driving for many different road conditions. Tire skidding occurs unexpectedly as a result of non-linearity in the system. The system behavior can be modelled and simulated using simulation software, which would help to visualize the system behavior. It would lead to obtaining optimum brake performance as well as safe driving. Modelling and simulation methods that can be used with every component of the system are presented. A variety of simulation software has been discussed.

Keywords: Anti-lock brake system; ABS; brake control; modelling; simulation.

I. INTRODUCTION

The Anti-lock braking system (ABS) is commonly used in modern vehicles. It provides safe driving which could prevent accidents from happening. Many ABS control schemes have been advanced since the 1950s [1]. Currently, the development of safety systems has become a main concern in the automotive industry as a result of the increase in vehicle accidents [2]. In addition, other systems such as four-wheel steering [8], traction control (TC) and many others that work hand in hand with the ABS are equipped on vehicles [3]. These systems do not only secure the driver, but they also protect pedestrians [4]. Nowadays, ABS and electronic stability control (ESC) are compulsory for both vehicles and trucks [5]. The function of the ABS is to prevent tires from locking by controlling the wheel slip ratio [6]. Front tire locking causes an oversteer phenomenon, whereas rear tire locking introduces understeer which might spin the car around [7]. An ABS enables the driver to steer the vehicle when the brake is abruptly applied, therefore keeping the vehicle safe and stable [7].

The ABS can be mathematically described as a model to be tested and developed. This system consists of a set of components that work together to reduce a vehicle's speed until it stops. The system contains mechanical and electronic parts. Figure 1 illustrates the ABS construction.

The mechanical components are a pedal, master cylinder, disc, pads and tires. The electronic parts are sensors, actuators and a controller. Controlling the brake's hydraulic pressure keeps the slip ratio at an ideal level without tire skidding [24]. In the ABS control development, obtaining an ideal slip ratio is the target that is usually set to be achieved [26].

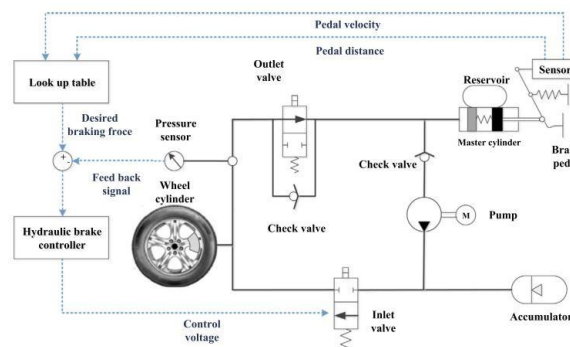


Fig. 1. ABS layout [10]

There are many control strategies applied to ABS controls. Fuzzy logic is one of these control methods [63] and is likely to be the most privileged control strategy for the ABS [1] as it is categorized as an intelligent method used for the system's control [64]. It is a smart methodology which works with non-linear complex systems that are quite difficult to be modelled mathematically [1]. Two elements would cause non-linearity of the ABS which are the coefficient of friction and road conditions [12]. Neural network has also been used for system control and attained meaningful outcomes [9]. The mix in using different control strategies, for instance, a sliding mode control (SMC), fuzzy control, optimal control, and adaptive non-linear control are found in ABS researches [12]. A PID controller can be used with this non-linear system to decrease the stopping distance and the longitudinal slip [33]. Fuzzy PID controllers are fitted in many cars to manage multiple systems [19].

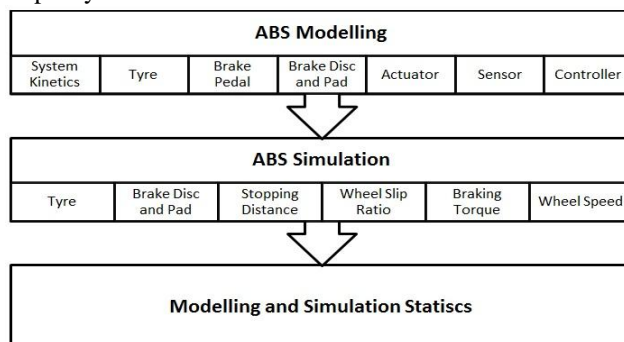


Fig. 2. Subtopics arrangement.

Revised Manuscript Received on December 30, 2019.
* Correspondence Author
Abdulaziz S. Alaboodi*, Department of Mechanical Engineering, College of Engineering, Qassim University, Saudi Arabia, Saudi Arabia. Email: alaboodi@qec.edu.sa
Khalid M. Algadahl, Department of Mechanical Engineering, College of Engineering, Qassim University, Saudi Arabia, Saudi Arabia. Email: kmgadah@gmail.com
© The Authors. Published by Blue Eyes Intelligence Engineering and Sciences Publication (BEIESP). This is an [open access](https://creativecommons.org/licenses/by-nc-nd/4.0/) article under the CC-BY-NC-ND license <http://creativecommons.org/licenses/by-nc-nd/4.0/>



A fuzzy neural network uncertainty estimator has been used to estimate non-linearity of the ABS [30]. A system which is built on SMC needs to define the bounds of uncertainties [25]. Besides, the uncertainty would occur as a result of mass and road gradient variation [12]. This paper presents the methods used in ABS modelling. It covers modelling of the ABS components. It is structured as it is depicted in figure 2 and is created to become a baseline for ABS modelling and simulation research.

II. ABS MODELING

In order to start developing an ABS, modelling the system should be conducted first. This would save time, effort and money. While this system contains many components, simplifying its model by neglecting some parameters might be helpful in some cases. Determining inputs and outputs of the system is rather important to obtain meaningful outcomes.

A. System Kinetics

Considering the quarter vehicle model is sufficient for ABS modelling, using such a model is beneficial to correlate between the wheel acceleration, normal load, braking force and multiple damping ratios [24]. The braking force is distributed upon the four tires of the vehicle. Kinetics of the quarter vehicle model is shown in figure 3. Most of the brake models do not take the other resistance into account, such as aerodynamic force, which might decrease the braking performance [51]. In principle, the longitudinal force depends upon the wheel slip ratio, even if the ratio is small, but it changes correspondingly [26]. Furthermore, for easing system computation, some variables such as rolling and aerodynamic resistance and passive movement of the rotation axis are usually excluded in literature [21].

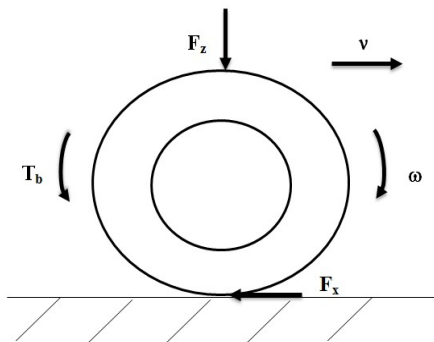


Fig. 3. Quarter Car model.

When modelling a complex system, variables do not remain constant, therefore, the equation needs to be modified accordingly [2]. The wheel angular speed and vehicle speed are assumed as degrees of freedom [24]. The longitudinal dynamics of the wheel is formulated in the following equation [24]:

$$m\dot{\omega} = -\mu(\lambda)F_z(t) \quad (1)$$

The wheel angular rotation is derived from the following equation [28]:

$$I_w\ddot{\omega}(t) = \mu(\lambda)R F_z(t) - K_b P_b(t)R \quad (2)$$

The right-hand side of the equation (2) represents the friction and the braking torque [28]. The angular acceleration

and braking pressure are derived from the previous equation and described in the following equation [24]:

$$\ddot{\omega}(t) = \frac{R}{I_w} \mu(\lambda)R F_z(t) - K_b P_b(t) \quad (3)$$

$$P_b(t) = \frac{\mu(\lambda)R F_z(t) - I_w \ddot{\omega}(t)}{K_b} \quad (4)$$

The difference between the wheel acceleration and brake pressure can be calculated by the next equations [24]:

$$\Delta\ddot{\omega}(t) = \frac{1}{I_w} \mu(\lambda)R \Delta F_z(t) - K_b \Delta P_b(t) \quad (5)$$

$$\Delta P_b(t) = \frac{1}{K_b} \mu(\lambda)R \Delta F_z(t) - I_w \Delta\ddot{\omega}(t) \quad (6)$$

The difference between the wheel friction coefficient can be obtained using this equation [28]:

$$\Delta\mu(\lambda) = \frac{1}{R} \frac{\Delta\ddot{\omega}(t) + \Delta P_b(t)K_b}{\Delta F_z} \quad (7)$$

B. Tire

There are many aspects that should be taken into consideration while tire modelling. Tire modelling is a difficult task due to its non-linearity and viscoelasticity [11]. The tire has lateral, vertical and longitudinal forces acting on it [11]. Tire dimensions should be identified during the modelling process [69]. Moreover, its structure could affect the ABS performance. Tire tread stiffness affects the slip ratio [65]. Hyperplastic is the material used for tire modelling [69]. Modelling the tire rim, reinforcement, internal air pressure, road surface contact, tractive force and setting the tire as a solid object are the aspects which can be utilized at modelling [69]. Luge tire models are used to approximate the road friction condition [41]. While tire modelling, the road friction is recommended to be neglected to obtain significant results of other factors [70]. Rolling resistance is directly proportional to tire pressure [67]. The variation of the tire pressure which occurs while the tire is moving seems to have an influence on the friction coefficient [48]. In literature, the tire adhesion coefficient is always identified [20]. The relationship between the tire and road surface can be expressed using the Pacejka model. It is noted by tire magic formula and used for evaluating the moment and tire steady-state forces [13]. The experimental equation is expressed as follows:

$$Y_{Pcj}(x) = D \sin[C \arctan B_x - E(B_x - \arctan B_x)] \quad (8)$$

It is not easy to classify the magic formula parameters due to the fact that it contains trigonometric and inverse trigonometric functions [9]. Other models which are taken from the Pacejka model, such as starched string and contract mass, could be used with an ABS [11].

C. Brake Pedal

The brake pedal amplifies a driver's depressing force and transfers it to the brake master cylinder. Changing the pedal,

disc or hydraulic piston geometry will vary the braking force [68]. The brake pedal is linked to the master cylinder and is considered as a solid body. This is shown in the following equations 17, 10:

$$F_p = k_p X_p \tag{9}$$

$$M_p \ddot{X}_p + C_p \dot{X}_p = F_{pi} - k_{ps} X_p \tag{10}$$

D. Brake Disc and Pad

Brake discs and brake pads can be modelled in many different ways. The structural model of the brake disc is utilized for brake disc heat transfer simulation. It is also helpful in identifying deformed parts 71. Overheating of the brake disc and caliper causes non-linearity on the brake system 11.

E. Actuator

Brake actuator allows the hydraulic pressure to pass through the ABS circuit as per a command signal received from the brake controller. The brake pressure rate of change is proportional to the flow rate of the brake fluid; meanwhile, the flow rate is dependent on the opening of a control valve 1. Initial condition values cannot be chosen randomly as a consequence of its sensitivity at optimization 9.

For some applications, the hydraulic pressure that goes to the wheel cylinder can be controlled up to 5 bars 54. Approximating the initial values requires lots of engineering practice [9]. The electric actuator, which is used for regenerative braking, performs faster than the friction brake 7. However, switching off the actuators at declaration will disable the regenerative brake, and as a result, the ABS will rely on the friction brake 7.

An electro-hydraulic actuator should have performance tracking as well as fast response time 17. The potential difference between the electromagnetic control coil and the hydraulic pressure can be calculated by the following equation 10:

$$u_{Act} = L \frac{di}{dt} + ri \tag{11}$$

The wheel slip of each wheel can be controlled individually while using brake actuators 40. When braking, the gas inside the hydraulic accumulator experiences an adiabatic process and, therefore, the gas state equation can be applied and the polytropic index can be selected 1.4 16:

$$P_0 V_0^n = P_1 V_1^n = P_2 V_2^n = const \tag{12}$$

F. Sensor

Wheel speed is measured by an inductive coil sensor that is fitted to a reflector ring 24. Rate and accelerometer sensors have recently been used for wheel slip control 7. Sensors have different working principles as they either work by sound, microwave or light in order to detect road conditions 46. Sensor and actuator noises are neglected in ABS research, although adding a Kalman filter would reduce noise and wear 4. To obtain an ideal performance of a wheel speed sensor, its transfer function should be linearized in the frequency domain 58.

G. Controller

Adaptive fuzzy logic is the method used for a non-linear continuous time, but it is not suitable for discrete time 23. The ideal value that is regularly chosen for the friction coefficient μ is 0.2 1. It is suggested to use the tire-force curve when programming the brake controller 72. Figure 4 shows the ABS control block diagram:

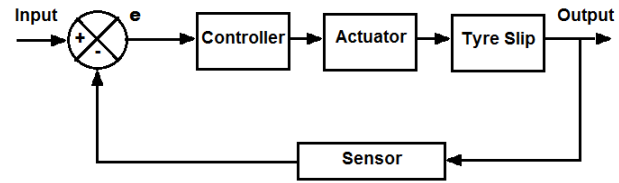


Fig. 4.ABS Control Block diagram

Logging the driving behavior and using it for the control system is useful for development 19. The tire angular acceleration and velocity can be derived from the signal that comes from the wheel speed sensor 11. Parameters of a membership function can be selected by using a Takagi-Sugeno-Kang model 1. There are systems such as RT2500 inertial and Global Positioning System (GPS) navigation provided by OxTS that can be used to measure the vehicle tilt angle as well as longitudinal and lateral velocities 3. When braking, the speed of the tire becomes less than the speed of the vehicle which is known as λ 26. Maximum braking force relies on the tire friction coefficient 13. Figure 5 shows the ABS constructed as blocks in Simulink.

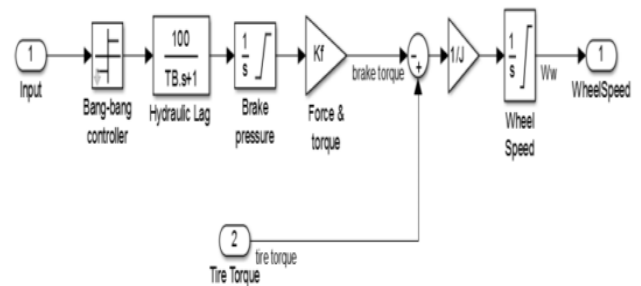


Fig. 5.Brake dynamic in Simulink for braking system with ABS [1]

In a vehicle, there are many control systems performing simultaneously. For this reason, modelling the vehicle lateral, vertical and longitudinal dynamics is highly important 22. One of the significant characteristics while developing the system is to choose the degree of freedom to ensure its durability within its allocated memory 22. P and D parameters could have more effect on the PID controller performance 32. Multi-input and single-output controllers use the fuzzy logic controller where tire slip and vehicle velocity are inputs 62. The road friction can be predicted by utilizing the signal fusion methods 60. The ideal value that is regularly chosen for the friction coefficient μ is 0.2 1.

Each optimization algorithm would have an influence on the tire model parameters and computing precision 45.

An ABS can be modelled by using the bond graph method 38. Lumped disturbances can be approximated by using the inertial delay control method 56. When the braking rotation speed is smaller than the wheel speed, longitudinal slip λ happens. This is illustrated in the following equation 26:

$$\lambda = \frac{v - R\dot{\omega}}{v} \quad (13)$$

An ABS design for off-road is complex with a regenerative brake 5. For estimating non-linear systems, a piecewise linear system could be used 17. The ABS decreases the hydraulic pressure on tires while the electronic stability control produces the pressure again 4. Maximum overshoot, response error and rise time are crucial outcomes of any non-linear system [91]. The Lyapunov adaptive control method is not adequate to discrete time applications 23. When using the barrier Lyapunov function control method, tire friction coefficient can be set as an input of ABS 68.

Longitudinal slip and angular velocity are the variables needed for a controller 11. The methods which are currently used for an ABS are not flexible to the changes in the road conditions 30. A normal load could consider variables to include the suspension system at simulation 41. The conventional PID controller can be tuned by the use of a hit and trial technique 42. When the car is driven on rough roads, sensors create fluctuated signals, and consequently, the ABS will stop functioning 5. Turning of the ABS will decrease the responsive torque when driving off-road 5.

Categorizing and analyzing the closed-loop system of linear systems were the initial success of the adaptive control 23. The adaptive control can estimate and compensate uncertain variables, unlike the robust control 23. There are many strategies applied for controlling the ABS, for instance, the fuzzy control, the neural network and switching control, and the linear and non-linear control [6]. Non-linearity of the ABS is caused by tyre saturation, un-modelled dynamics, a variety of vehicle factors, and tyre friction coefficient 25. The ABS might become an obstacle for off-road driving conditions 11. SMC and logic threshold controls are used to prevent the wheel from locking 26.

For tackling uncertainties in closed loop systems, many control methods have been developed 23. Digital computers accept control algorithm which is computed in digital form 23. Combining a robust prediction controller with a radial basis function neural network (RBNN) would provide better control performance than the sliding controller [30]. The fuzzy genetic control system provides efficient control by allowing the pressure to reach the desired value 21. The fractional order sliding mode controller (FOSMC) adaptive system shows uncertainties for adaptable and predictive slip ratio 27. The tuning method of the fuzzy logic controller can be taken from the Lyapunov theory. Below 8 km/h, the ABS turns off because the sliding distance to the wheel lock is negligible 31.

General regression neural network (GRNN) and Bayes' theorem could be implemented to estimate the road/tire friction coefficient rather than using a complex tire model 43. Neural network is exact and adapted for the magic formula of the tire model 9. Radial basis function neural network can be used after approximating the uncertainties 25.

The sliding mode controller provides robust

performance, although instability of the road coefficient 53. The producing braking forces rely on tire surface contact 47. The Takagi-Sugeno hierarchical fuzzy-neural mode can be used to decrease the processing time of the controller as well as the control rules 29. The tire grip is achieved by using a Kalman-filter-based estimation algorithm 33. The stopping distance should be within the International Organization for Standardization (ISO) 21994 regulations 39. An on/off solenoid valve is used in lorry braking systems rather than a proportional solenoid 55.

The new Braking emergency system could increase the stopping distance in some cases when it conflicts with the ABS role 52. To optimize the rules of the fuzzy controller, the Particle Swarm Optimization algorithm is applicable 34. It is convenient to be used with complex systems derived from certain cost functions 59. The control algorithm can be simulated in State flow block found in the Simulink library 36. Linear Matrix Inequality and pole placement are two methods used to verify the fuzzy logic control system performance 44.

The PID controller is more attractable due to the ease of use and great real-time constraint 1. The neural network has the potential to be used with non-linear controls because it has a good parallel distributed processing 23. It will continue working while facing and solving system errors 23. It is more practical for hardware implementation and has adaptive learning capabilities 23. The Q-learning control can easily be utilized in an ABS because it does not require a primary controller for stabilizing 6. Super-twisting sliding mode algorithms can be used for ABS control 61.

For other applications used in electric vehicles (EV), super capacitors are used for obtaining optimal braking performance 57. Using a sensing technic for measuring the distortion of the axle bearing due to the loads would offer better tire slip control 37. To control the pressure oscillation which occurs in the master cylinder, a variable sinusoidal signal is sent to the ABS motor 35. The parameters used to formulate the control algorithm are the wheel slip ratio, longitudinal and vertical force 14.

The ABS inputs are wheel acceleration and wheel brake slip. The output control signal is sent to the actuator 21. For superior ABS performance, the slip ratio should be kept close to the ideal value 15. Tracking performance of the braking force using mean square error is expressed in the following equation 10:

$$e_Y = \frac{1}{t} \int_0^1 (Y_d(t) - Y(t))^2 \quad (14)$$

The differential equation of PID controlled is [10]:

$$u(t) = K_P [e(t) + \frac{1}{T_I} \int_0^t e(t) dt + T_D \frac{de(t)}{dt}] \quad (15)$$

Next, the transfer function to be added to MATLAB/Simulink is as follows [30]:

$$K_{PID}(s) = P + I \frac{1}{s} + D \frac{N}{1 + N \frac{1}{2}} \quad (16)$$

The tracking error is calculated as follows [30]:

$$e(t) = \lambda(t) - \lambda_{opt}(t) \quad (17)$$

Modern controllers require signals calculated in digital or discrete time 23.

In the Proportional–Integral–Derivative controller (PID) P is related to the error that happens in the present, I show the error collected from the past, and D indicates the predicted upcoming error. The integral control method rises the system order 30. Signals come from sensors and should be filtered in order to become smooth. A set-point filter can be used to minimize overshoot signal.

Longitudinal velocity is counted according to the ratio between the wheel angular velocity and wheel radius with almost neglected tire deformation. Neural network controls perform better than other controllers when controlling uncertain non-linear systems. The controller could be given more details such as the difference in vertical load and tire road conditions. The neural network tire model can be used for low speed and a small steering angle, on the other hand, the magic formula is most convenient for high speed and big steering angles.

The fuzzy logic method describes the system linguistically. There are three steps that lead to building a fuzzy controller. These are fuzzification, defuzzification, and rule base. However, outputs and inputs of the system should be identified at first. Next, each membership function has to describe the condition of the inputs to the output. For example, assuming that the input is the wheel speed sensor and the output is the signal that is sent to the hydraulic actuator, it could be said as a rule that when the speed sensor is positive big, the hydraulic pressure is also a positive big. Table I demonstrates the membership function names of a fuzzy logic controller.

Table- I: Membership classification

Membership Function	
Short name	Full name
NB	Negative big
NMS	Negative medium small
NMH	Negative medium high
NS	Negative small
Z	Zero
PS	Positive small
PMH	Positive medium high
PMS	Positive medium small
PB	Positive big

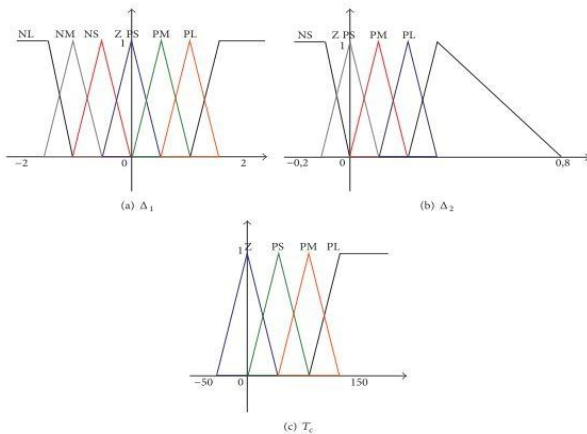


Fig. 6. Triangle membership functions of a fuzzy system

Increasing the membership function would give a higher

accuracy. However, not every input and output requires a lot of membership function. Moreover, the shape of the membership function should be taken into consideration. Choosing a triangle or trapezoidal shape would vary the system response. Figure 6 presents the membership function of the inputs and output of a fuzzy logic controller.

III. CONCLUSION

The ABS could be modelled and simulated by using computer software and can be formulated mathematically. The equations used for system components were gathered. Some control strategies applied to the system were discussed. Some parts of the system were simulated by many different simulation software. Simulation of stopping distance, wheel slip ratio, brake torque and wheel speed were presented. Some statistical analysis of the software used for the simulation were demonstrated. The modelling and simulation of the system would give better comprehension of how the system works and could be very helpful in system development. This will help to obtain an ideal braking performance and safer driving.

NOMENCLATURE:

m	Mass of a quarter vehicle model
v	Wheel longitudinal velocity
F_x	Longitudinal tyre force
T_b	Braking torque
μ	Friction coefficient
F_z	Normal force on the wheel
K_b	Brake gain
P_b	Brake pressure
R	Wheel radius
λ	Wheel longitudinal slip ratio
λ_{opt}	Wheel longitudinal optimal slip ratio
Y_{pcj}	Force or moment resulting from a slip parameter
χ	Longitudinal stiffness factor
C	Shape factor for longitudinal force
D	Peak value factor
E	Curvature factor
Y_{pcj}	Force or moment output
I_w	Inertia of the wheel
ω	Wheel angular displacement
$\dot{\omega}$	Wheel angular speed
$\ddot{\omega}$	Wheel angular acceleration
F_{pv}	Vacuum booster output force
k_p	Brake pedal stiffness
F_p	Pedal force
M_p	Pedal mass
C_p	Pedal damping coefficient
k_{ps}	Return spring stiffness of the pedal
F_{pi}	Vacuum booster input force
X_p	Input displacement of the pedal
u_{Act}	Amplifier output voltage
r	Actuator coil resistance
i	Electric current
L	Inductance of the coil
n	Polytropic exponent value

P_0	Pre-charging pressure
P_1	Minimum pressure
P_2	Maximum pressure
V_0	Volume of the gas at pressure P_0
V_1	Volume of the gas at pressure P_1
V_2	Volume of the gas at pressure P_2
e	Tracking error
Y_d	Lateral coordinate of a target brake
Y	Actual brake lateral coordinate
e_y	Mean square error
N	Filter coefficient
u	Controller function
P	Proportional coefficient
I	Integral coefficient

REFERENCES

1. Yadav, Digvijay K. Modeling an Intelligent Controller for Anti-Lock Braking System. *International Journal of Technical Research and Application* **2015**, 122-126.
2. Andrikov, D., Dm , and C. P. Droh Mecapeu. Design of Flat Wheel Braking Control System with Three Modes of Motion: Rolling, Sliding, Locking. *Procedia Computer Science* **2017**.
3. Jalali, Milad, Saeid Khosravani, Amir Khajepour, Shih-ken Chen, and Bakhtiar Litkouhi. Model Predictive Control of Vehicle Stability Using Coordinated Active Steering and Differential Brakes. *Mechatronics* **2017**.
4. Vivas-Lopez, Carlos A, Juan C Tudon-Martinez, Diana Hernandez-Alcantara, and Ruben Morales-Menendez. Global Chassis Control System Using Suspension, Steering, and Braking Subsystems. *Mathematical Problems in Engineering* **2015**.
5. Ivanov, Valentin, Dzmityr Savitski, Klaus Augsburg, Phil Barber, Bernhard Knauder, and Josef Zehetner. Wheel Slip Control for All-Wheel Drive Electric Vehicle with Compensation of Road Disturbances. *Journal of Terramechanics* **2015**.
6. Radac, Mircea Bogdan, and Radu Emil Precup. Data-Driven Model-Free Slip Control of Anti-Lock Braking Systems Using Reinforcement Q-Learning. *Neurocomputing* **2018**.
7. Basrah, M Sofian, Efstathios Siampis, Efstathios Velenis, Dongpu Cao, and Stefano Longo. Wheel Slip Control with Torque Blending Using Linear and Nonlinear Model Predictive Control. *Vehicle System Dynamics* **2017**.
8. Zhu, Bing, Yizhou Chen, Jian Zhao, and Yunfu Su. Design of an Integrated Vehicle Chassis Control System with Driver Behavior Identification. *Mathematical Problems in Engineering* **2015**.
9. Wang, Jianfeng, Yiqun Liu, Liang Ding, Jun Li, Haibo Gao, Yuhan Liang, and Tianyao Sun. Neural Network Identification of a Racing Car Tire Model. *Journal of Engineering* **2018**.
10. Wang, Chunyan, Wanzhong Zhao, and Wenkui Li. Braking Sense Consistency Strategy of Electro-Hydraulic Composite Braking System. *Mechanical Systems and Signal Processing* **2018**.
11. Penny, Wietsche Clement William, and Pieter Schalk Els. The Test and Simulation of ABS on Rough, Non-Deformable Terrains. *Journal of Terramechanics* **2016**.
12. Rahul Verma, Divyesh Ginoya, P.D. Shendge & S.B. Phadke, and to Slip Regulation for Anti-Lock Braking Systems Using Multiple Surface Sliding Controller Combined with Inertial Delay Control. *Vehicle System Dynamics International Journal of Vehicle Mechanics and Mobility* **2015**.
13. Rajendran, Sulakshan, Sarah Spurgeon, Georgios Tsampardoukas, and Ric Hampson. Time-Varying Sliding Mode Control for ABS Control of an Electric Car. *IFAC-PapersOnLine* **2017**, 8490-8495.
14. Savitski, Dzmityr, Dmitrij Schleinin, Valentin Ivanov, Klaus Augsburg, Emilio Jimenez, Rui He, Corina Sandu, and Phil Barber. Improvement of Traction Performance and off-Road Mobility for a Vehicle with Four Individual Electric Motors: Driving over Icy Road. *Journal of Terramechanics* **2016**, 10, 33-43.
15. Sekour, M, Kada Hartani, and Abdelkader Merah. Electric Vehicle Longitudinal Stability Control Based on a New Multimachine Nonlinear Model Predictive Direct Torque Control. *Journal of Advanced Transportation* **2017**, 19.
16. Yang, Yang, Chang Luo, and Pengxi Li. Regenerative Braking Control Strategy of Electric-Hydraulic Hybrid (EHH) Vehicle. *Energies* **2017**.
17. Zuo, Xin, Jian Wei Liu, Xin Wang, and Hua Qing Liang. Adaptive PID and Model Reference Adaptive Control Switch Controller for Nonlinear Hydraulic Actuator. *Mathematical Problems in Engineering* **2017**.
18. Acosta Lúa, Cuauhtémoc, Bernardino Castillo Toledo, Stefano Di Gennaro, and Marcela Martinez-Gardea. Dynamic Control Applied to a Laboratory Antilock Braking System. *Mathematical Problems in Engineering* **2015**.
19. Chen, Ko-Chun, and Hsin-Yi Shih. Research and Simulation of the Electrical Vehicle Based Dynamical System. *Mathematical Problems in Engineering* **2015**.
20. Cui, Gaojian, Jinglei Dou, Shaosong Li, Xilu Zhao, Xiaohui Lu, and Zhixin Yu. Slip Control of Electric Vehicle Based on Tire-Road Friction Coefficient Estimation. *Mathematical Problems in Engineering* **2017**.
21. Fargione, Giovanna, Domenico Tringali, and Giacomo Risitano. A Fuzzy-Genetic Control System in the ABS for the Control of Semi-Active Vehicle Suspensions. *Mechatronics* **2016**.
22. Henning, Kay Uwe, and Oliver Sawodny. Vehicle Dynamics Modelling and Validation for Online Applications and Controller Synthesis. *Mechatronics* **2016**.
23. Jiang, Yiming, Chenguang Yang, and Hongbin Ma. A Review of Fuzzy Logic and Neural Network Based Intelligent Control Design for Discrete-Time Systems. *Dynamics in Nature and Society* **2016**, 142-149.
24. Koylu, Hakan, and Ali Cinar. 2018. Development of Control Algorithm for ABS-suspension Integration to Reduce Rotational Acceleration Oscillations of Wheel. *Transactions of the Institute of Measurement and Control* **2018**, 10, 34-1018.
25. Mirzaeinejad, Hossein. TRobust Predictive Control of Wheel Slip in Antilock Braking Systems Based on Radial Basis Function Neural Network. *Applied Soft Computing* **2018**, 29-318.
26. Peng, Jiankun, Hongwen He, Wei Liu, and Hongqiang Guo. Hierarchical Control Strategy for the Cooperative Braking System of Electric Vehicle. *The Scientific World Journal* **2015**.
27. Tang, Yinggan and Zhang, Xiangyang and Zhang, Dongli and Zhao, Gang and Guan, Xiping. Fractional order sliding mode controller design for antilock braking systems. *Neurocomputing* **2013**, 10, 122-130.
28. Mirzaei, Mehdi and Mirzaeinejad, Hossein. Optimal design of a non-linear controller for anti-lock braking system. *Transportation research part C: emerging technologies* **2012**, 10, 19-35.
29. Wang, Wei-Yen and Chen, Ming-Chang and Su, Shun-Feng. Hierarchical T-S fuzzy-neural control of anti-lock braking system and active suspension in a vehicle. *Automatica* **2012**, 10, 1698-1706.
30. Tajeddin, S and Batra, M and Azad, NL and McPhee, J and Fraser, RA. An Adaptive and Fast Control Strategy for Antilock Braking System. *ASME 2015 Dynamic Systems and Control Conference 2015*, 10, 142-149.
31. Aksjonov, Andrei and Augsburg, Klaus and Vodovozov, Valery. Design and Simulation of the Robust ABS and ESP Fuzzy Logic Controller on the Complex Braking Maneuvers. *Applied Sciences* **2016**, 10, 382 pages.
32. Majid, MM Abdul and Bakar, SA Abu and Mansor, S and Hamid, MK Abdul and Ismail, NH. Modelling and PID Value Search for Antilock Braking System (ABS) of a Passenger Vehicle. *Journal Abbreviation* **2017**, 10, 228-236.
33. Castillo, Juan J and Cabrera, Juan A and Guerra, Antonio J and Simon, Antonio. A novel electrohydraulic brake system with tire-road friction estimation and continuous brake pressure control. *Journal Abbreviation* **2016**, 10, 1863-1875.
34. Zang, Huaquan. The Research of Vehicle Handling Performance and Stability Based on the Integrated Control of Electronic Stability Program and Anti-Block Braking System. *Boletin Tecnico* **2017**, 10.
35. Liu, Tianyang and Yu, Zhuoping and Xiong, Lu and Wei, HAN. Anti-Lock Braking System Control Design on an Integrated-Electro-Hydraulic Braking System. *Journal Abbreviation* **2017**, 10, 298-306.
36. Wan, Neng and Xiong, Jian. ABS Self-Adjustment Threshold Control Based on MATLAB. *International Conference on Green Intelligent Transportation System and Safety* **2016**, 10, 349-355.
37. Kerst, Stijn and Shyrokau, Barys and Holweg, Edward. Anti-lock braking control based on bearing load sensing. *Proc. of EuroBrake* **2015**, 10, 4-6.

38. Ben Salem J., Lakhoua M.N. and El Amraoui L. Modeling the speed measuring chain in ABS braking system. *2016 7th International Conference on Sciences of Electronics, Technologies of Information and Telecommunications (SETIT)* 2016, 10, 76-81.
39. ISO 21994:2007 Passenger cars - Stopping distance at straight-line braking with ABS-Open-loop test method. Available online: <https://www.iso.org/standard/40588.html> (accessed on 9 November 2018).
40. Cerdeira-Corujo, Miguel and Costas, Adriana and Delgado, Emma and Barreiro, Antonio. Comparative analysis of gain-scheduled wheel slip reset controllers with different reset strategies in automotive brake systems. *CONTROL* 2016, 10, 751-761.
41. Senatore, Adolfo and Sharifzadeh, Mojtaba. Estimation of tyre-road friction during ABS braking for snow and ice conditions. *JWorkshop AIT Tribologia e Industria* 2018, 10, 19 pages.
42. Khan, Irfanullah and Hussain, Imtiaz and Shah, M Zaigham Abbas and Kazi, Kamran and Patoli, Aamir Ali. Design and simulation of anti-lock braking system based on electromagnetic damping phenomena. *Electrical Engineering and Computing Technologies (INTELLECT)* 2017, 1-8.
43. Zhang, Xudong and Göhlich, Dietmar. A hierarchical estimator development for estimation of tire-road friction coefficient. *PLOS one* 2017, 12.
44. Zhao, Jian and Huang, Jun and Zhu, Bing and Shan, Jingwei. Nonlinear Control of Vehicle Chassis Planar Stability Based on TS Fuzzy Model. *SAE Technical Paper* 2016, 142-149.
45. Li, Bin and Yang, Xiaobo and Yang, James. In-plane flexible ring tire model parameter identification: optimization algorithms. *SAE International Journal of Vehicle Dynamics, Stability, and NVH* 2017, 2.
46. Shi, Jiangchao and Wu, Jian and Zhu, Bing and Zhao, Yang and Deng, Weiwen and Chen, Xi. Design of Anti-Lock Braking System Based on Regenerative Braking for Distributed Drive Electric Vehicle. *SAE Technical Paper* 2018.
47. Sivaramakrishnan, Srikanth and Singh, Kanwar Bharat and Lee, Peter. Experimental investigation of the influence of tire design parameters on anti-lock braking system (abs) performance. *SAE International Journal of Passenger Cars-Mechanical Systems* 2015, 10, 142-149.
48. Savitski, Dzmitry and Hoeping, Kristian and Ivanov, Valentin and Augsburg, Klaus. Influence of the tire inflation pressure variation on braking efficiency and driving comfort of full electric vehicle with continuous anti-lock braking system. *SAE International Journal of Passenger Cars-Mechanical Systems* 2015, 9, 460-467.
49. Yong, Jiawang and Gao, Feng and Ding, Nenggen and Wang, Wei and Hu, Xianrong. Hardware-in-the-loop Simulation for an Integrated Braking System. *SAE Technical Paper* 2015.
50. Yuan, Ye and Zhang, Junzhi and Lv, Chen and Li, Yutong. Design and performance analysis of a novel regenerative braking system for electrified passenger vehicles. *SAE International Journal of Materials and Manufacturing* 2016, 9, 699-706.
51. Saraiev, Olexii and Gorb, Yuliya. A Mathematical Model of the Braking Dynamics of a Car. *SAE Technical Paper* 2018.
52. Yang, Mike and Xing, Peter and Flynn, Thomas and Tsuge, Brandon and Lawrence, Jonathan and Siegmund, Gunter P. The Effect of Target Features on Toyota's Autonomous Emergency Braking System. *SAE Technical Paper* 2018.
53. Haggag, Salem A and Mansouri, Abraham. Aerodynamic Forces Impact on Vehicle Braking Longitudinal Dynamics with a Sliding Mode Controller. *SAE Technical Paper* 2016.
54. Yang, Yi and Chu, Liang and Yao, Liang and Guo, Chong. Study on the Algorithm of Active Pressurization Control of Regenerative Braking System in Pure Electric Vehicle. *SAE Technical Paper* 2015.
55. Seo, Minjun, Changhee Yoo, Sang-Shin Park, and Kanghyun Nam. Development of Wheel Pressure Control Algorithm for Electronic Stability Control (ESC) System of Commercial Trucks. *Sensors* 2018, 18, 2317.
56. Singh, Shikha and Ginoya, Divyesh and Phadke, SB and Shendge, PD. Inertial delay control based multiple sliding surface controller for anti-lock braking system with second order actuator. *IEEE* 2008, 10, 1641-1646.
57. Paredes, Marina GSP and Pomilio, José A. Control System to Regenerative and Anti-Lock Braking for Electric Vehicles. *2018 IEEE Transportation Electrification Conference and Expo (ITEC)* 2018, 135-1399.
58. Rohrmann, Kris and Sandner, Marvin and Meier, Phil and Prochaska, Marcus. A novel readout technique for magnetoresistive sensors in automotive anti-lock braking systems. *International Conference on Industrial Instrumentation and Control (ICIC)* 2008, 10, 1-5.
59. Moghaddam, Hamidreza and Mojallali, Hamed. Robust control of anti-lock braking system using optimized fast terminal sliding mode controller. *Modes Mechanical Engineering* 2017, 17, 290-298.
60. Li, Liang and Yang, Ke and Jia, Gang and Ran, X and Song, J and Han, Z-Q. omprehensive tire--road friction coefficient estimation based on signal fusion method under complex maneuvering operations. *Mechanical Systems and Signal Processing* 2015, 56, 259-276.
61. Chen, Yao and Dong, Hairong and Lu, Jinhua and Sun, Xubin and Guo, Liang. A Super-Twisting-Like Algorithm and Its Application to Train Operation Control with Optimal Utilization of Adhesion Force. *IEEE Trans* 2016, 17, 3035-3044.
62. Aksjonov, Andrei and Vodovozov, Valery and Petlenkov, Eduard. Design and experimentation of fuzzy logic control for an anti-lock braking system. *Electronics Conference (BEC), 2016 15th Biennial Baltic* 2016, 207-210.
63. Ivanov, Valentin. A review of fuzzy methods in automotive engineering applications. *European Transport Research Review* 2015, 7, 29.
64. Uzunsoy, E. A Brief Review on Fuzzy Logic Used in Vehicle Dynamics Control. *Journal of Innovative Science and Engineering (JISE)* 2018, 2, 1-7.
65. Hartikainen, Lassi and Petry, Frank and Westermann, Stephan. Longitudinal wheel slip during ABS braking. *Vehicle System Dynamics* 2015, 53, 237-255.
66. Irshad, Mohammad and Ali, Ahmad. Optimal tuning rules for PI/PID controllers for inverse response processes. *IFAC-PapersOnLine* 2018, 51, 413-418.
67. Toma, Marius and Andreescu, Cristian and Stan, Cornelia. Influence of tire inflation pressure on the results of diagnosing brakes and suspension. *Procedia Manufacturing* 2018, 22, 121-128.
68. Zhang, Jinhua and Sun, Weichao and Jing, Houhua. Nonlinear Robust Control of Antilock Braking Systems Assisted by Active Suspensions for Automobile. *IEEE Transactions on Control Systems Technology* 2018.
69. YPravin Menariya, Akash Shelar, G. N. Kotwal. ANALYSIS OF INFLATED STRUCTURES: A CASE STUDY ONANALYSIS OF AUTOMOBILE TYRE USING ANSYS. *IJAERD* 2017, 4, 179-186.
70. Bekakos, Chrysostomos-Alexandros, George Papazafeiropoulos, Dan J. O'Boy, and Jan Prins. Finite element modelling of a pneumatic tyre interacting with rigid road and deformable terrain. *International Journal of Vehicle Performance* 2016, 142-166.
71. Belhocine, A., N. M. Ghazali, and O. I. Abdullah. Structural and contact analysis of a 3-dimensional Disc-Pad model with and without thermal effects. *TUJEST* 2014, 4, 406-418.
72. Sivaramakrishnan, Srikanth, Kanwar Bharat Singh, and Peter Lee. Influence of Tire Operating Conditions on ABS Performance. *Tire Science and Technology* 2015, 216-241.

AUTHORS PROFILE



Eng. Khalid M. Algadad The author has received his BEng of Mechanical engineering in 2009 from Riyadh College of Technology (RCT). He obtained his PG dip. of Automotive and Motorsport engineering in 2014 from Brunel University London. Currently, he is doing his MSc in Mechanical engineering at Qassim university. His research interest includes systems modelling and simulation, materials engineering, finite element analysis, fracture mechanics, automotive engineering, control systems. He is a member of American Society of Mechanical Engineers (ASME). He is also one of the Institution of Mechanical Engineers (IMechE) members.



Prof. Abdulaziz S. Alaboodi completed his PhD from King Fahd University for Petroleum and Minerals, Saudi Arabia. He is a Professor at Qassim University. He has over 40 Multi-national Journal and Conference papers to his credit.