

# Conceptualization of a Novel QoS-Efficient Enhanced Routing Schema for Wireless Mesh Networks

Naveen T.H, Vasanth G

**Abstract:** Since many years the area of wireless networks provided various solutions to promote a better quality of communication aspects in our day-to-day lives. Wireless mesh networks (WMNs) being a subset, emerging as a promising technology-oriented network as it comprises of a set of key features such as robustness, simplicity in operating conditions, fault-tolerant capability and faster process of deployment. The area has a wide range of commercially deployable applications where the communication gets carried out in multi-hop fashion between nodes. Here, nodes act as both the router and the host. Despite having potential characteristics features WMNs routing and Quality-of-Services (QoS), performance improvement is a key challenge derived in many studies. The formulated study thereby addresses this problem and come up with a novel routing solution to attain better QoS aspects such as throughput performance, delay performance in the context of WMN. The design of the formulated approach applies two prime functional schema i) approaches to handle the QoS problem, and along with this ii) the analytical design and modeling of the formulated routing approach aims to mitigate the hidden terminal problems with extensive quantitative analysis. The mathematical modeling approaches are further computationally executed, and assessment of aggregated throughput, energy, and QoS ratings are retained. Finally, the experimental outcome demonstrated that the presented approach attains better QoS and energy performance improvement (~60% and ~70% respectively) as compared to existing baseline models SOAR and ROMER.

**Keywords:** Wireless Mesh Networks (WMN), Quality-of-Services (QoS), Routing, Energy Optimization

## I. INTRODUCTION

The research evolution trend curve since many years shows that continuous research efforts have been kept towards strengthening the wireless networking features in both communication and routing scenario. The extensive research effort also shows that there exist various areas opened up from the core backbone of wireless network architectural paradigm such as LAN(WLAN)/Wi-Fi, Wi-Max, 4G cellular networks, WSN, VANET, MANET etc [1][2]. Whereas each of this type of networks contributed various potential applications to enhance the quality of human lives and still under supervision for opportunistic and futuristic IP enabled smart

communication systems in the context of cyber-physical systems [3][4]. The advancement of the foundation of wireless networking also evolved up with a new type of devious and promising wireless technology in this IP-world often called as WMN. Considering the matter of fact it can be stated that the, the collaborative paradigm of various types of wireless sub-networks such as Wi-Fi, WLAN, WSN, VANET etc. resulted in WMN broadband and mobile computing[5]-[10]. The conceptual idea behind establishing the communication in WMN clearly states that data should be routed from each radio-node of a specific sub-net to another node of another sub-net by ensuring very minimal latency and optimized QoS performance aspects such as throughput and packet-delivery ratio aspects [11].

There are various studies which have claimed that the successful adequate operating conditions in WMN from both energy and routing perspective could provide several improvised advantages to the conceptualized Internet of Things (IoT) objects[12][13]. Considering the fact that makes WMN more opportunistic requires satisfactory improvement in both energy and routing performance (i.e. in the context of QoS) along with fault-tolerance and robustness. However, the area where both energy and QoS-efficient routing can be optimized are less likely explored in the existing system. Thereby WMN is still cloaked with various pitfalls which confine its futuristic advancement and scope of adaptability and 5<sup>th</sup> generation networking architecture [14] [15] [16].

The study addresses both routing and QoS problem in WMN and attempted to improve the QoS rating and minimizes the signaling overhead by means of providing a collision free MAC in static WMN. It also addresses multi-path routing problem, congestion and load balancing aspects by deriving an energy-aware QoS efficient routing strategy. The routing model is represented with an optimized algorithm which captures the traffic behavioral attributes to formulated better route in the network-layer. The optimized multi-path routing protocol also designed considering the energy constraints. The analysis of the numerical simulation is performed with respect to key performance parameters which justifies both energy, routing and QoS aspects such as i) Energy consumption per bit, ii) average delay (s) and iii) Throughput performance. And the analysis also computed Beacon arrival span for the performance analysis purpose. The validation of the model is carried out by comparing the outcome with significant relevant WMN routing approaches such as SOAR and ROMER. In every instances of simulation scenario the formulated system

Revised Manuscript Received on January 05, 2020

\* Correspondence Author

Naveen T.H\*, Research Scholar, Visvesvaraya Technological University Belagavi, Karnataka, India,

Vasanth G\*\*, Prof & Head, Dept. of Computer Science & Engineering Government Engineering College, Krishnarajpet, Mandya District, Karnataka, India

(PRoP) accomplishes comparatively superior outcome which ensures its adaptability into various time-critical applications of Internet of Medical Things (IoM).

The entire research study is organized with respect to different sections such as section 2 discusses about the conventional trend of literatures worked in the similar direction. Section 3 outlines the overall research problem context. Section 4 further illustrates the design methodology of the formulated system (PRoP). Finally section 5 discusses about the result obtained and section 6 present the conclusion of the study respectively.

II. LITERATURE SURVEY

This section highlights most recent relevant studies which have also focused on the QoS efficient routing problems in the context of WMN. The study of (K. Sundaramoorthy and S. S. Rao Madhane, 2014) focused on both security and QoS amplification problem in WMN. The study introduced a secure routing scheme which also provides QoS aware routing. The simulation outcome shows that the scheme performs well towards maximizing the throughput performance [17].

(R. Murugeswari and S. Radhakrishnan, 2014) also focused on energy-aware data delivery performance in WMN where the conceptualization of the approach is application oriented. The target application area is emergency and disaster recovery in the context of WMN. The following table highlights few other approaches and their significant contribution towards similar problem [18].

Table 1 Few related studies on WMN

Cite	Problem Area of WMN	Approach
(R. Sousa , 2010) [19]	Effective video content streaming	GOP based encoding
(L. Ndlovu, M. Lall and O. P. Kogeda,2016) [20]	QoS problem	Investigational study
A. M. Mashraqi and T. Erlebach[21]	QoS problem (Delay –aware)	Delay-aware routing
A. F. Aji, P. Hatta and E. S. Wihidiyat,[22]	Throughput optimization	Distributed scheduling approach
(Y. Li, X. Zhang and X. You,2010)[23]	QoS problem	QoS assurance for IEEE 802.16

There are few other studies like (Y. Gao, H. Zhang, D. Yang and X. Lu, 2014)[24] , (I. Armuelles-Voinov, J. Chung-Miranda and A. Chung-Cedeño , 2014) [25] , C. Roy and J. Grégoire , [26] also focused in the similar problem of QoS efficient routing in the context of WMN networking operations.

III. RESEARCH PROBLEM

After analyzing several existing studies it is realized that formulating a QoS efficient routing protocol for WMN is a crucial task due to several factors such as i) Hidden node problem , ii) exposed node problem etc. Considering the fact

of research trend curve also exhibits that there are very lesser studies which have explored both energy and QoS efficient routing in WMN. However, complex topological representation also makes WMN routing scenario quite challenging and very lesser routing protocols can adapt to that specific type of situation due to higher complexity, poor scalability and slower convergence performance. Thereby the problem statement of the study can be derived as: “To design a QoS efficient routing protocol with energy efficient operating condition is computationally a challenging task in the case of complex network like WMN”.

IV. CORE DESIGN CONCEPTUAL BACK-BONE

The design goal of the formulated system in this context aims to improve the Quality-of-service performance in wireless mesh network (WMN) operations such as efficient multi-hop route formulation and data transmission, well-organized resource scheduling, traffic modeling and load balancing etc. The architecture is defined on the basis of underlying service oriented modeling where a set of functional block are introduced in the form of analytical design. The core-backbone of the formulated system consisting of several numerical functional blocks as shown in the following figure 1.

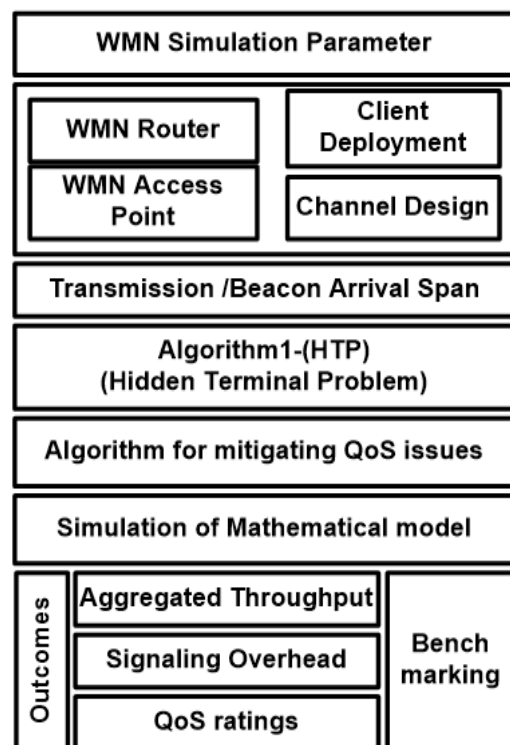



Fig.1 Design Methodical functional blocks

The prime agenda of this approach is to formulate an optimized service oriented algorithm which can ensure better traffic management in the form of key-technological enabler of multi-hop routing in a WMN. The traffic-management strategy also formulates better resource scheduling by handling the congestion under variable traffic-load to satisfy the Quality-of-Service (QoS) requirements. Here the QoS requirements are justified with two different prime attributes such as throughput and average packet delay. The hypothetical design of the system model also considers that network should exhibit higher

throughput fairness under variable traffic load and also it should not affect much the energy performance of WMN networking operation. The optimized routing design also balances the energy performance without affecting much the QoS aspects. The following are subsequent functional blocks used to design the entire routing framework for WMN.

**a) Network Modeling Functional Block:** The initial process of analytical formulation involves network modeling to realize the architecture of WMN client deployment scenario. For the purpose of WMN client node localization, the analytical foundation initially considers number of clients (nC) and also initializes the specified area of client deployment (cA). The network modeling also further considers inclusion of an WMN access point terminal (A<sub>point</sub>) anywhere in the cA. The analytical formulation shows that  $\forall C \cup A_{point} \in Z^+$ . The computational process is modeled in a way where random distribution of clients (C) is targeted within cA. The generation of x<sub>c</sub> and y<sub>c</sub> is realized to perform localization of each WMN clients with a random function  $\phi_1(nC)$ .

The visualization of the WMN nC, cA can be realized by simulating the mathematical modeling in a numerical computing tool and The network model can be shown as below:

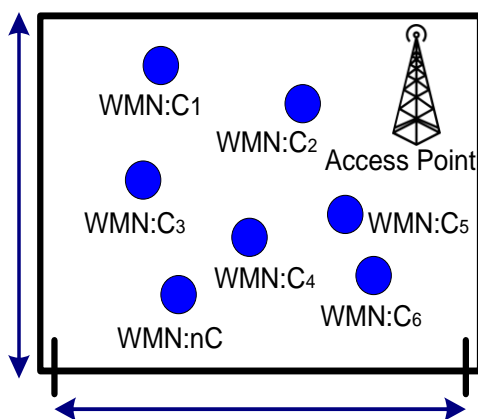

**Fig.2 Visualization of the formulated WMN**

Figure 2 shows the network deployment scenario of WMN in the formulated context.

**b) Algorithm (HTP) Functional Block:** Further shows the subsequent functional block to activate the algorithm1 (HTP) that is to mitigate the hidden node problem (HTP). For this purpose the analytical formulation initializes a set of operational parameters as listed below:

**Table 1 Quantitative Network Parameters for Algorithm-1(HTP)**

Simulation Attributes	
Beacon Interval Span (bIs)	1 to 10
Radius(tr)	27
Active Transmission Period(aTp)	0.15
SynMsg(Sm)	0.03
PermMsg(Pm)	0.12
PrioDatMsg(Pd)	0.68
CnfMsg(Cm)	0.17

This functional block in the initial phase of computation compute the distance from each client to another client in the process of establishing the connectivity with respect to the

increasing Transmission Range (tr). The computed value of distance (d) is then stored into a matrix called as  $\theta_{x_c, y_c}[]$ . The process also computes tr and execute links/connectivity between nC considering a condition that is if  $d \leq tr$ . The computed links are then stored into a vector call l[]. Further each client node the the l[] get updated with the following eq.

$$Up\_l[] \leftarrow \sum l[tr, i] \text{ where } \begin{cases} 2 \leq tr \leq 40 \\ 1 \leq i \leq nC \end{cases} \text{ eq. 1}$$

Further the computational programmable module  $\phi_2(l[])$  executes the optimized algorithm to overcome the HTP. The computational process involved into assessing the algorithm-1 for HTP is discussed as follows:

**Algorithm:** Routing Algorithm for Resisting Hidden Terminal Problem in WMN

**Start**

1. Initialize: bIs, tr, aTp, Sm, Pm, Pd, Cm
2. Activate( $\phi_1(nC)$ )
3. Activate( $\phi_2(l[])$ )
4. for each(nC)
5. Define link matrix l[] using eq. 1
6. check l[] s.t if  $d \leq tr$  then FlagValue == 1
7. Else 0 //not connected
8. end
9. make diagonal value = 0
10. end
11. Activate optimized routing using  $\phi_3(l[], nC)$  //

**optimized Dijkstra's algorithm**

12. Compute  $[C_{matrix}, R_{matrix}] \leftarrow \phi_3(l[], nC)$  //cost

**evaluation**

13. Execution till end.

**End**

Algorithm1 is intended to restrict the HTP during the routing scenario thereby it is analytically modeled and realized in a numerical computing environment. The background of HTP shows that it increases network overhead by creating simultaneous traffic overload in the MAC layer which in longer run affect the throughput and network latency and also have a negative impact on the energy performance. The algorithm addresses this issue by introducing an enhanced Dijkstra's algorithm. Here if nodes are connected then the flag value become 1 else become 0. Finally Dijkstra's algorithm attain the cost matrix( $C_{matrix}$ ) and optimized route ( $R_{matrix}$ ) where reliable data transmission with optimized delay and QoS performance can take place.


The further process will apply a cost effective mode of classifying the WMN, nC into separate groups. The process activates an empty matrix of Gr[] and further computes the 1-hop neighbour of C. If the condition applied to compute the 1-hop neighbour doesn't get satisfied with respect to numerical threshold modeling then further the module computes 2-hop neighbours of C. The entire computed route information is then stored into Gr[Info]. This computational module of the reusable framework is denoted with  $\phi_4(nGr)$  where the input pipeline defines the number of groups nGr. The computational procedure further initiate a group based schedule-timings for each client where each group of client can communicate with

each-other through effective time-synchronization. The process in this phase also restore the group(id)s which are active and time-synchronized for a specified interval of time. Within schedule-timings, one  $C(m)$  will forward sync msg to its adjacent neighbour  $C(k)$  and within that scheduled interval communication will take place for all the timing slots. Further the computational process define a data priority level (dPI) to mitigate the data scheduling and forwarding of packets (msg) under variable traffic-load. Finally a functional block  $\phi_5(dPI)$  is applied to satisfy the QoS requirements of WMN. The computational model also got validated by The numerical modeling of the formulated approach is functionally realized in MATLAB which is supported with minimum 4GB internal memory and Intel Core i5 processing unit. The following are the quantitative analysis which justifies the energy and QoS performance in WMN routing scenario. The following figure 2 shows the comparative

comparing its outcome with the conventional approaches of SOATR and ROMER. The next consecutive section will illustrate the outcome obtained after simulating the functional modules of the proposed routing approach in a numerical computing environment. The experimental result analysis is performed considering three different key performance parameters. The elaboration of the experimental outcome obtained further illustrated with a proper quantitative analysis of data. The correctness of the simulation outcome is justified with respect to conventional baseline modelings.

**V. EXPERIMENTAL ANALYSIS**


performance assessment of energy performance where inferencing clearly shows that in the case of formulated system energy aware transmission impose very lesser energy per bit and on the other hand it is quite higher in the case of ROMER where SOAR poses more or less similar outcome.

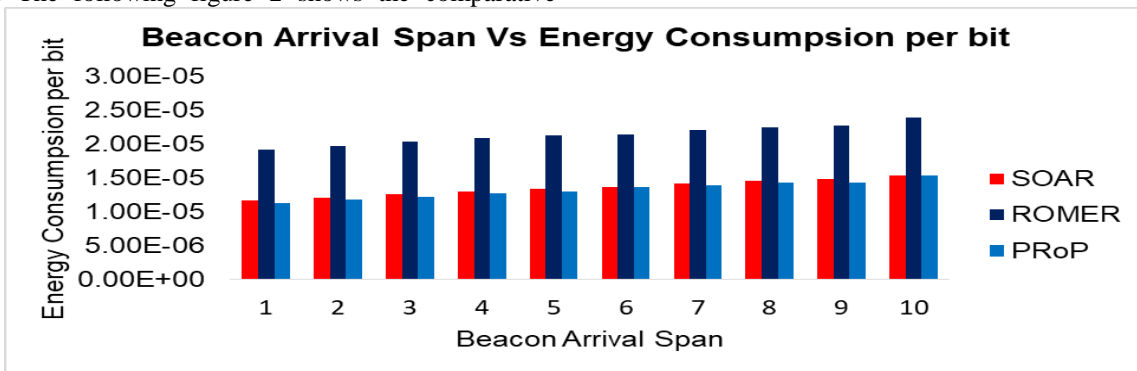

**Fig.2 Quantified Outcome of Energy consumption per bit**

Figure 2 thereby justifies that the formulated system attain better energy performance as compared to the existing baseline modelings. The study also evaluated QoS

performance of the formulated system as shown in the following figure 3 (Average Delay Analysis) and figure 4 (Average Throughput Analysis).

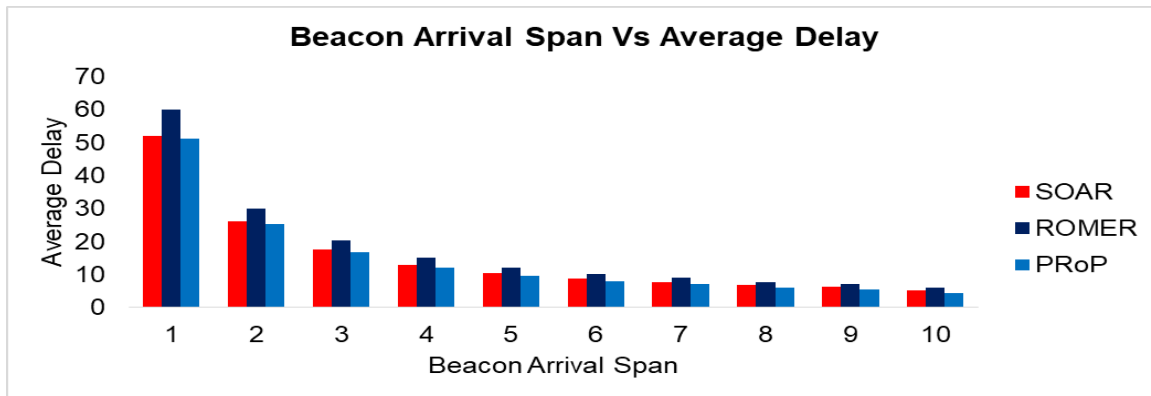

**Fig.3 Quantified Outcome of average delay**

The quantified analysis shows that the formulated system accomplishes better outcome in delay minimization with increased value of Beacon Arrival Span which is quite higher in the cases of SOAR and ROMER. As the study also focuses on Throughput maximization thereby analysis of throughput

assessment is crucial from the numerical evaluation view-point. The extensive outcome of throughput is highlighted in the below figure 4. The analysis is carried out with respect to beacon arrival span and aggregated throughput performance.

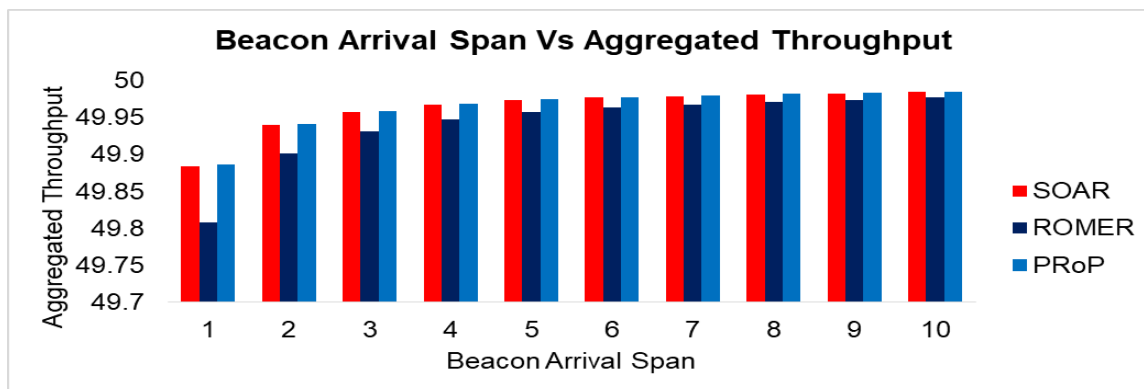


Figure 4 Quantified Outcome of remaining energy

The analysis of throughput performance also shows that the formulated system is quite robust and also consistent to deliver better throughput performance in variable traffic condition and route establishment scenario. However overall it can be concluded that the formulated approach is QoS efficient in route optimization while maintaining better energy performance in the context of WSN.

## VI. CONCLUSION

The area of WMN received enormous research effort towards improvising the routing and communication performance. Considering the matter of fact that WMN deals with potential time-critical application requirements in practice such as it attempts to fulfil the dynamic QoS demand in various aspects such as health-care, defense, body area networks (BAN) etc. Despite of having potential scope of research the conventional research gap explored shows that majority of the studies are only limited to theory and do not define broader scope of WMN into futuristic industrial Internet of Things (IoT) communications. It is also found that energy and QoS efficient commercialized applications are yet to be implemented with higher throughput characteristic. The presented research study thereby introduces a novel QoS-efficient routing schema which aims to minimize the hidden node problem and also employ efficient time-synchronization scheduling to maximize the QoS performance in WMN. The methodology adopted analytical modeling and numerical computation to realize the algorithm performance in terms of delay-aware routing and energy efficiency. The methodology is formulated with mathematical notion and the design requirement of the system is also extensively illustrated with client deployment and channel design. The study considers analysis of outcome with respect to three prime simulation attributes such as energy, aggregated throughput, and delay performance scenario. The performance analysis shows that the system performance got improved ~78% in the context of throughput optimization. The comparative performance assessment also shows that the formulated approach provides promising outcome in terms of delay and energy as well, in contrast with existing baselines such as ROMER and SOAR.

## REFERENCES

1. P. Lv, Z. Cai, J. Xu and M. Xu, "Multicast Service-Oriented Virtual Network Embedding in Wireless Mesh Networks," in IEEE Communications Letters, vol. 16, no. 3, pp. 375-377, March 2012.

2. M. M. Hassan and A. Gueroui, "I. Improvement of Qos by Dynamic Reallocation of the Mesh Deterministic Access in Wireless Mesh Networks Ieee 802.11s," 2012 International Conference on Communications and Information Technology (ICCIT), Hammamet, 2012, pp. 227-230.
3. S. Kolipaka, B. N. Bhandari and A. Rajani, "Performance analysis of AODV with multi-radio in hybrid wireless mesh network," 2014 Eleventh International Conference on Wireless and Optical Communications Networks (WOCN), Vijayawada, 2014, pp. 1-5.
4. Schindelbauer, C. (2006). Mobility in wireless networks. In SOFSEM 2006: Theory and Practice of Computer Science (pp. 100-116). Springer Berlin Heidelberg.
5. Jain, K., Padhye, J., Padmanabhan, V. N., & Qiu, L. (2005). Impact of interference on multi-hop wireless network performance. *Wireless networks*, 11(4), 471-487
6. Waharte, S., Boutaba, R., Iraqi & Ishibashi, B. Routing protocols in wireless mesh networks: challenges and design considerations. *Multimedia Tools and Applications*, 29(3), 285-303
7. Sichertiu, M. L. (2005, May). Wireless mesh networks: opportunities and challenges. In *Proceedings of World Wireless Congress (Vol. 2)*.
8. L. Boroumand, R. H. Khokhar, L. A. Bakhtiar and M. Pourvahab, A Review of Techniques to Resolve the Hidden Node Problem in Wireless Networks, *Smart Computing Review*, vol. 2, no. 2, April 2012
9. Aruna Jayasuriya, Sylvie Perreau, Arek Dadej, Steven Gordon, Hidden vs. Exposed Terminal Problem in Ad hoc Networks, *Australian Telecommunication Networks & Applications Conference*, pp. 52-59, 2004
10. Lisa Gansky, *The Mesh: Why the Future of Business Is Sharing*, Penguin, 2010
11. Vishram Mishra, Jimson Mathew, Lau Chiew Tong, *QoS and Energy Management in Cognitive Radio Network: Case Study Approach*, Springer-Technology & Engineering, 2016
12. Karthika K. C, "Wireless mesh network: A survey," 2016 International Conference on Wireless Communications, Signal Processing and Networking (WiSPNET), Chennai, 2016, pp. 1966-1970.
13. M. Eslami, O. Karimi and T. Khodadadi, "A survey on wireless mesh networks: Architecture, specifications and challenges," 2014 IEEE 5th Control and System Graduate Research Colloquium, Shah Alam, 2014, pp. 219-222
14. D. C. Karia, A. Jadiya and R. Kapuskar, "Review of Routing Metrics for Wireless Mesh Networks," 2013 International Conference on Machine Intelligence and Research Advancement, Katra, 2013, pp. 47-52.
15. Ian F. Akyildiz, Xudong Wang, *Wireless Mesh Networks*, John Wiley & Sons, 2009.
16. A. B. M. Alim Al Islam, M. J. Islam, N. Nurain and V. Raghunathan, "Channel Assignment Techniques for Multi-Radio Wireless Mesh Networks: A Survey," in *IEEE Communications Surveys & Tutorials*, vol. 18, no. 2, pp. 988-1017, Secondquarter 2016.W.-K. Chen, *Linear Networks and Systems* (Book style).Belmont, CA: Wadsworth, 1993, pp. 123-135.
17. K. Sundaramoorthy and S. S. Rao Madhane, "The effect of secure routing with QoS Amplification (SRQA) in Wireless Mesh Networks," Second International Conference on Current Trends In Engineering and Technology - ICCTET 2014, Coimbatore, 2014, pp. 484-488.
18. R. Murugeswari and S. Radhakrishnan, "Reliable data delivery for emergency and disaster recovery in wireless mesh network," International Conference on Information Communication and

- Embedded Systems (ICICES2014), Chennai, 2014, pp. 1-6.
19. R. Sousa, E. Mota, E. N. Silva, Kleverton Santana Paixão, B. Faria and João Batista Pinto Neto, "GOP size influence in high resolution video streaming over wireless mesh network," The IEEE symposium on Computers and Communications, Riccione, 2010, pp. 787-789
  20. L. Ndlovu, M. Lall and O. P. Kogeda, "A review of service discovery schemes in wireless mesh networks," 2016 IST-Africa Week Conference, Durban, 2016, pp. 1-7
  21. A. M. Mashraqi and T. Erlebach, "Delay and interference aware metric in multi-channel wireless mesh network," 2016 Wireless Telecommunications Symposium (WTS), London, 2016, pp. 1-7
  22. A. F. Aji, P. Hatta and E. S. Wihidiyat, "QoS and RMA performance analysis for wireless mesh network implementation," 2018 International Conference on Information and Communications Technology (ICOIACT), Yogyakarta, 2018, pp. 254-258
  23. Y. Li, X. Zhang and X. You, "A multi-hop QoS assurance method in IEEE 802.16 mesh networks," 2010 2nd International Conference on Signal Processing Systems, Dalian, 2010, pp. V3-675-V3-679. doi: 10.1109/ICSPS.2010.5555447
  24. Y. Gao, H. Zhang, D. Yang and X. Lu, "A Scheduling Framework Supporting QoS in Wireless Mesh Network," 2014 IEEE International Conference on Computer and Information Technology, Xi'an, 2014, pp. 65-69. doi: 10.1109/CIT.2014.49
  25. Armuelles-Voinov, J. Chung-Miranda and A. Chung-Cedeño, "Evaluation of QoS provisioning in nodes of Wireless Mesh Networks based on IEEE 802.11s," 2014 IEEE Central America and Panama Convention (CONCAPAN XXXIV), Panama City, 2014, pp. 1-6.
  26. C. Roy and J. Grégoire, "Multihop backpressure scheduling for IEEE 802.11s multiradio cognitive wireless mesh networks," Proceeding of IEEE International Symposium on a World of Wireless, Mobile and Multimedia Networks 2014, Sydney, NSW, 2014, pp. 1-4.

## AUTHORS PROFILE

**Naveen T H** completed his B.E and M.Tech in Computer Science and Engineering from Visvesvaraya Technological University, Belgaum, India in the year 2002 and 2005 respectively. Currently he is pursuing Ph.D at Government Engineering College, Mandya (Affiliated to Visvesvaraya Technological University, Belgaum, India). His areas of interest include:



Routing in wireless mesh networks, cross-layer optimization, load-balancing in mesh networks. He has delivered several Talks in National / International Conferences. He has also published few papers in International Journals and Conferences.



**Vasanth G** completed his B.E, M.E and Ph.D in Computer Science and Engineering from Gulbarga University, BMSCE Bangalore University, India respectively. Currently he is working as Professor and Head in Department of Computer Science and Engineering at Government Engineering College R Pet, India. He is an AICTE Expert committee member. His areas of interest include: Wireless networks, Routing in wireless mesh networks and Congestion control algorithms. He has published several papers in International Journals and Conferences. He has also served as Keynote Speaker and Chair for several reputed conferences.